



The Vagary Pendant Lights exceptionally minimalist design incorporates our ultra-thin, semi-transparent vertical optics. Optional seamless row mounting for continuous light. It is perfect for applications that include conference rooms, open offices, retail settings, anywhere you desire an elegant statement piece.

TECHNICAL DATA

Wattage	40W, 60W
CCT	Selectable 3000K/3500K/4000K
Driver	0-10V Dimming
CRI	80Ra
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cULus conforms to UL Std. 1598Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
	Suitable for dry locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

Seamless Continuous Row Mount



Each Power Feed Connections Up to 40ft.

Visual Comfort



Diffused Flat Lens and Louver Lens.

CCT Selectable




3000K/3500K/4000K Selectable.

FEATURES



- Sleek and elegant minimalist design.
- Transparent optic and edge-lit.
- Seamless continuous row mount.
- CCT selectable.

DIMENSION

Max Pendant Cable Length: 3.9ft (1300mm)

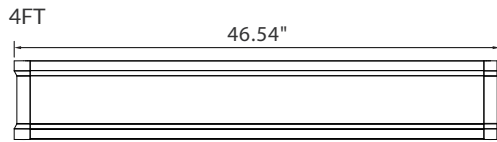

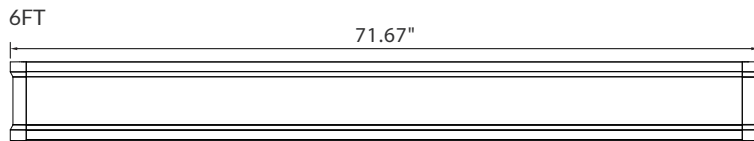

Side View



ORDERING INFORMATION

EXAMPLE: VAGA12-SW1-PM-D-FDL

VAGA								
Series	Size	CCT	Voltage	Driver	Mounting Options	Light Distribution	Lens Options	Finish
VAGA	12 4FT 18 6FT	SW Selectable ¹ 3000K 3500K 4000K	1 120-277V	BLANK Dim to 10% ²	PM ³ Pendant ³	D ⁴ Direct ⁴ I Indirect ID Indirect & Direct	FDL ⁵ Flush Diffused Lens ⁵  LVL ⁶ Louver Lens ⁶ 	BLANK ⁷ White ⁷ BK Black

NOTES:

- 4000K is default setting.
- Dim to 1% is available. Please contact customer service.
- Aircraft Cable pendant mount kits include dry ceiling and drop ceiling and they need to be bought separately. Please refer to the following accessory table to choose the right pendant mounting kits.
- Direct distribution is standard.
- Flush Diffused Lens is standard.
- Louver lens is only available for direct distribution.
- White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)

Drop Ceiling Suspension Mount List



MAG-PMK3-5FT
MAG-PMK3-5FT-BK
Aircraft Cable Pendant Mount Kits for Drop Ceiling, with 5ft Aircraft Cable and 5ft Power Cord. (One Set Per Fixture). White/Black.

MAG-PMK3-12FT
MAG-PMK3-12FT-BK
Aircraft Cable Pendant Mount Kits for Drop Ceiling, with 12ft Aircraft Cable and 12ft Power Cord. (One Set Per Fixture). White/Black.

*Suitable for 9/16" and 15/16" Flat Ceiling. If for 9/16" slot ceiling please contact Customer Service.

Dry Ceiling Suspension Mount List



MAG-PMK1-5FT
MAG-PMK1-5FT-BK
Aircraft Cable Pendant Mount Kits for Dry Ceiling, with 5ft Aircraft Cable and 5ft Power Cord. (One Set Per Fixture). White/Black.

MAG-PMK1-12FT
MAG-PMK1-12FT-BK
Aircraft Cable Pendant Mount Kits for Dry Ceiling, with 12ft Aircraft Cable and 12ft Power Cord. (One Set Per Fixture). White/Black.


PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.


Optics	4FT 40W			6FT 60W		
	3000K	3500K	4000K	3000K	3500K	4000K
Diffuser	4000lm 1000lm/ft	4400lm 1100lm/ft	4400lm 1100lm/ft	6000lm 1000lm/ft	6600lm 1100lm/ft	6600lm 1100lm/ft
Louver	3200lm 800lm/ft	3400lm 850lm/ft	3400lm 850lm/ft	4800lm 800lm/ft	5100lm 850lm/ft	5100lm 850lm/ft

PHOTOMETRY


All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

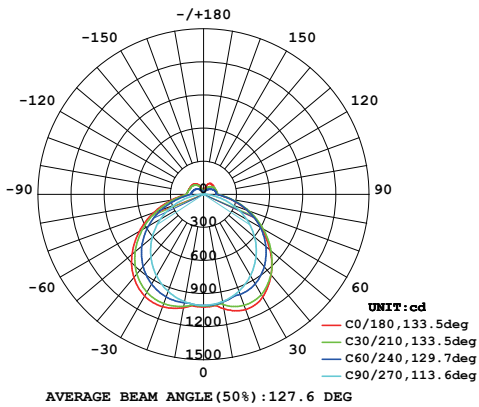

**Direct
Flush Diffused Lens**

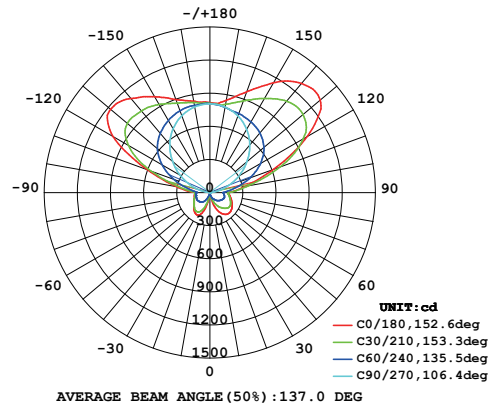

**Indirect
Flush Diffused Lens**

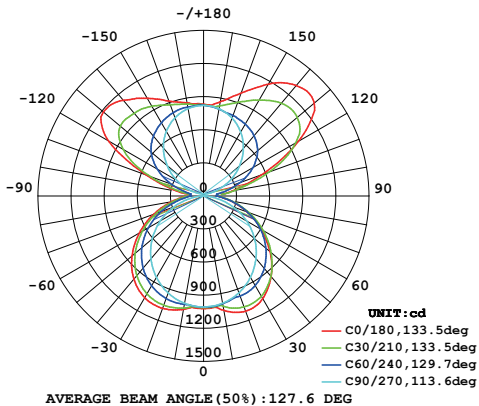

**Direct and Indirect
Flush Diffused Lenses**