



2" LED Module

Round Flangeless
Mud Plate

Round Flangeless
Mud Plate



This 2" Porla LED Downlight features in interchangeable flangeless trims. Available in round and square shapes with integral driver in a remote driver box. Five CCT selectable. Ideal for a variety of applications for both residential and commercial settings.

TECHNICAL DATA

Wattage	13W
Lumen Output	1000lm
CCT	Selectable 2700K/3000K/3500K/ 4000K/5000K
Driver	Triac dimming - Standard 0-10V dimming - Optional
CRI	90
Cut Out	Round: Ø2-5/8" Square: 2-7/8"x2-7/8"
Beam Angle	38° (standard) 24°/60° (optional)
Input Voltage	120V or 120-277V, 50/60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for wet locations Type IC Rated
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP54

FEATURES

- 2" size available in round and square shapes with aluminum construction.
- Interchangeable flangeless trims.
- Five CCT selectable with standard FT6 cable for reliable operation.
- Type IC, Air-Tight & Wet - No Housing Required.

ORDERING INFORMATION


EXAMPLE: POR02-DL-10LM-90-38-TMS-MWH

POR							
Series	Size	Adjustable	Lumens/CRI	Beaming Angle ¹	Trim	Finish ³	Driver Options
POR Porla	02 2"	DL Non-Adjustable	10LM-90 1000lm 90CRI	24 24° 38 38° 60 60°	TMS ² Trimless	MWH Matte White MBK Matte Black	POR02-12W-4 1000lm Triac Dimmable Driver POR02-12W-1 1000lm 0-10V Dimmable Driver

NOTE:


1. 38° is standard. 24° and 60° are optional.
 2. Please choose the flangeless mud plate in the following accessory table.
 3. Custom colors are available at an additional charge.
- * 2700K, 3000K, 3500K, 4000K, 5000K selectable. 3000K is default setting.

ACCESSORIES (ORDERED AND SHIPPED SEPARATELY)

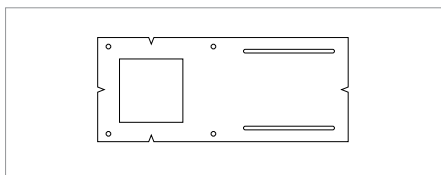


POR02-TRM-S-RIP

Rough-in Plate for 2" Porla
Trimless downlight, square
Opening 2-7/8"x2-7/8"

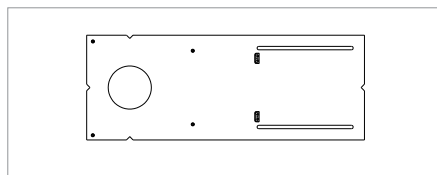

POR02-RIP-N

Rough-in Plate for 2" Porla
Round. Opening Ø2-5/8"

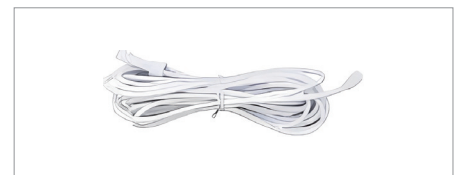

FT6 Extension Cable (2 pin).

POR-EXC6-FT6

6 feet 2 pin cable.

POR-EXC10-FT6

10 feet 2 pin cable.

POR-EXC20-FT6

20 feet 2 pin cable.



POR02-TMS-R-FMP-MWH

POR02-TMS-R-FMP-MBK

Flangeless Mud Plate for 2" Porla
Trimless downlight, round



POR02-TMS-S-FMP-MWH


POR02-TMS-S-FMP-MBK

Flangeless Mud Plate for 2" Porla
Trimless downlight, square


DIMENSION

2" DL Triac & 0-10V Dimming


With Flangeless Mud Plate Round

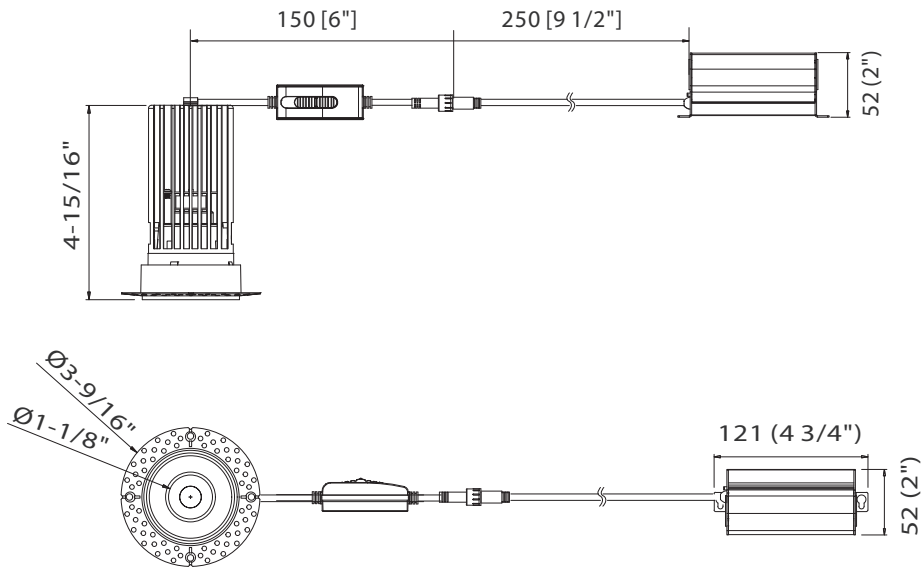


With Flangeless Mud Plate Square

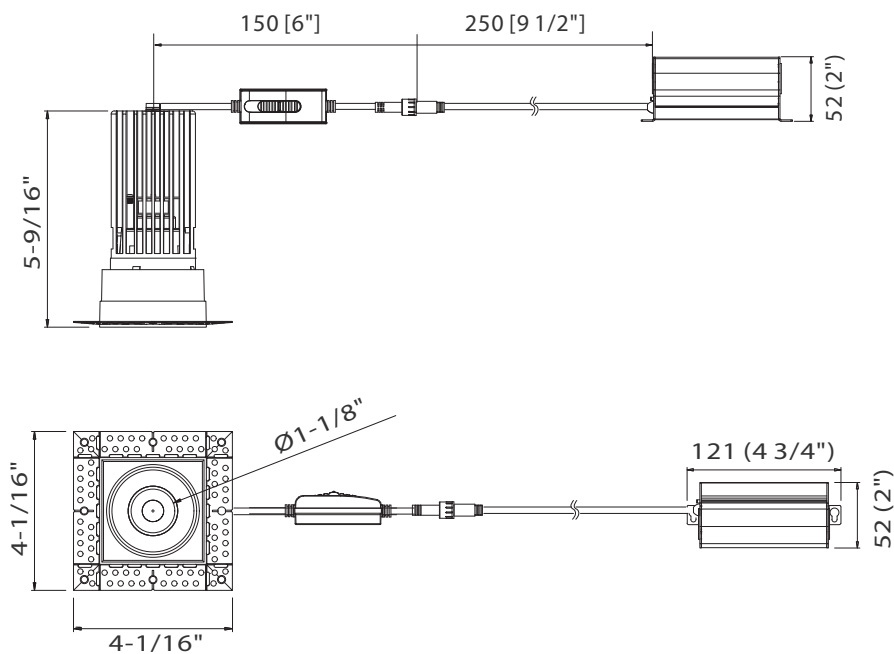

Rough In Plate for Round Flangeless Mud Plate

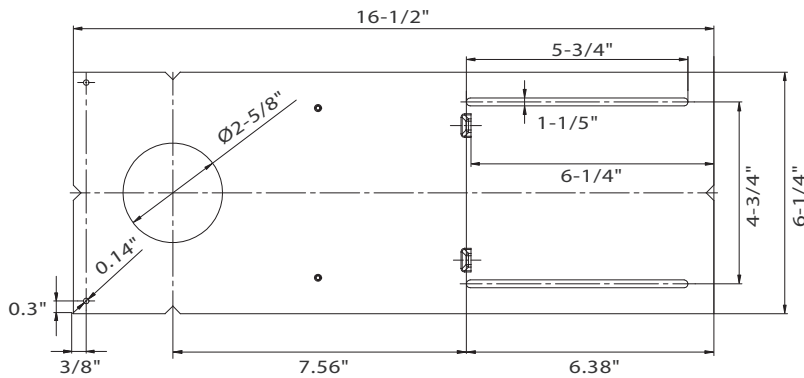

Rough In Plate for Square Flangeless Mud Plate

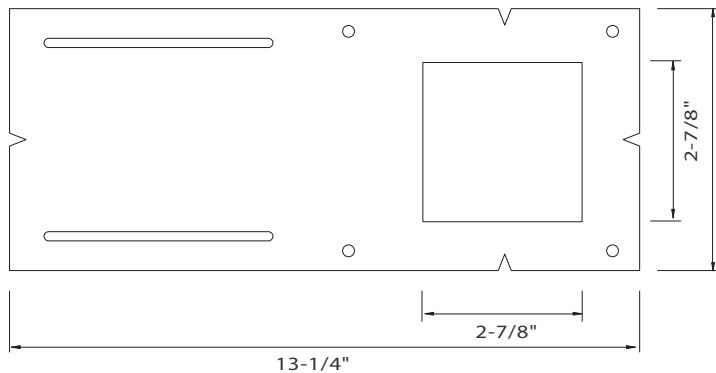

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	CRI	Beaming Angle
13W	876lm	2700K	90	38°
13W	952lm	3000K	90	38°
13W	1058lm	3500K	90	38°
13W	1091lm	4000K	90	38°
13W	1089lm	5000K	90	38°

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.