



LED Slim Wall Packs are designed and engineered as maintenance free, energy efficient alternatives to traditional fluorescent, high/low pressure sodium, metal halide, induction, and other types of lighting fixtures.

TECHNICAL DATA

Wattage	18W, 25W
CRI	>70
CCT	3000K, 4000K, 5000K
Input Voltage	120-277VAC, 50/60Hz
Minimum Ambient	-40°F (-40°C)
Driver	Class II
Certifications	cETL Listed
	RoHS compliant
	DLC qualified ¹
	Suitable for wet locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 250,000 Hours
IP Rating	IP65

NOTE:

1. Please refer to <http://www.designlights.org/QPL> for most current information.

FEATURES

- **Durable Construction:** Features an all-aluminum housing with rugged die-cast sides, integral weathertight LED driver compartments, and high-performance heat sinks for superior durability and thermal management.
- **Convenient Wiring:** Terminal block for power input suitable for 2 - 10 AWG wire.


SPECIFICATION

Length: 7.24"

Width: 3.54"

Height: 7.24"

Max. Weight: 3.39 lbs



ORDERING INFORMATION

EXAMPLE: SWP18501-A

SWP				
Series	Wattage	CCT	Voltage	Series
SWP	18	30	1	A
Slim Wall Pack	18W	3000K	120-277V	
	25	40		
	25W	4000K		
		50		
		5000K		

NOTE:

1. Standard Finish as Traditional Bronze.
2. DLC Premium only with 5000K at present.
3. Special Order as other finish color - Ask Customer Service for Details.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	Measured Wattage	CRI	Dist. Type	LPW
18W	1820lm	0.17A	18W	>70	N/A	101
25W	2530lm	0.23A	25W	>70	N/A	102

System Wattage	Max THD (%)	Power Factor	Power Efficiency	Replaces/Equiv.(MH)
18W	20	>0.9	90%	100W
25W	20	>0.9	90%	125W

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -40°F to 104°F (-40°C to 40°C).

Ambient		
Celsius	Fahrenheit	Multiplier
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99

Projected LED Lumen Maintenance



Data references the extrapolated performance projections for the LED Slim Wall Pack in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	0	25,000	50,000	100,000	250,000
Lumen Maintenance Factor	1.0	0.98 (L98)	0.96 (L96)	0.92 (L92)	0.70 (L70)

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

Ref#: 20260122

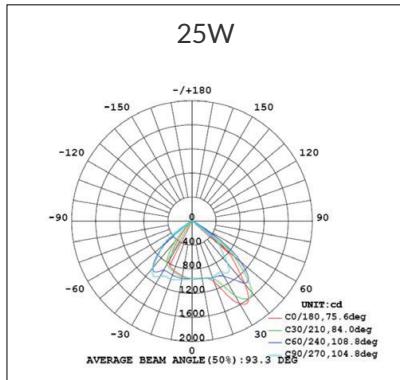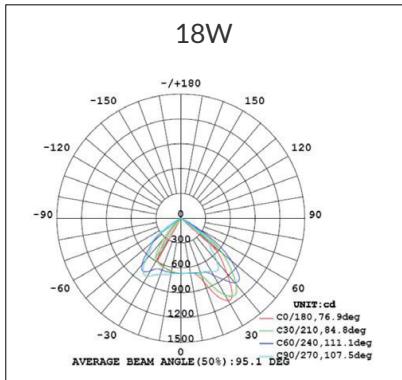

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.