



LED V-Line Wall Pack are designed with a high quality die cast housing. Durable chip and fade resistant powder coat finish. Efficient design separates the driver from the LED to minimize heat and optimize air cooling from an aerodynamic design. Modern appearance with adjustable head for precise aiming.

TECHNICAL DATA

Wattage	26W, 38W, 52W, 80W, 100W, 120W
CCT	3000K, 4000K, 5000K
Driver	0-10V Dimming Standard
CRI	70 is standard 80 is optional
Input Voltage	120-277V, 347V/480V, 50/60Hz
Projected Lifetime	L70-105,000 Hours
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Certifications	cETL listed DLC Premium qualified RoHS compliant
Power Factor	>0.9 @120Vac
Harmonic Distortion	<20% at full load
Suppression Protection	26W, 38W integral 2KV surge suppression protection standard 52W, 80W, 100W and 120W integral 4KV surge suppression protection standard
IP Rated	IP65 rated

FEATURES

- High efficiency up to 150LPW.
- Adjustable head up & down light.
- Main body separates from the driver.
- Tempered glass lens doesn't fade and discolor.



SPECIFICATION

26W & 38W

Length: 10.12"
Width: 9.84"
Height: 4.69"
Max Weight: 8.8lbs

52W, 80W, 100W, 120W

Length: 15.32"
Width: 13.78"
Height: 4.44"
Max. Weight: 17lbs

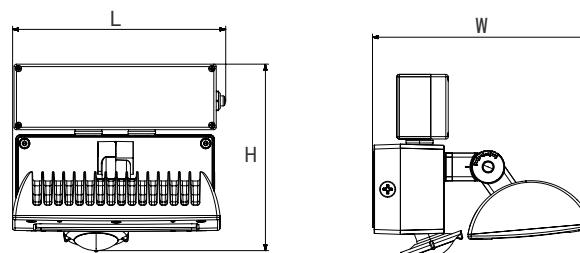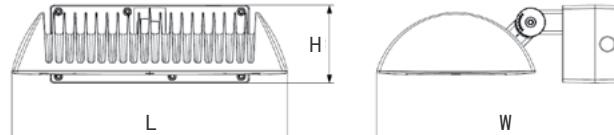

26W & 38W

With Emergency Battery Back-up
and Motion Sensor

Length: 10.35"
Width: 10.83"
Height: 9.24"
Max Weight: 11.92lbs


NOTE:

1. Contact Customer Service for Emergency Battery Back-up. It is only available in 26W and 38W at 120-277V.
2. Working temperature is 32°F to 104°F (0°C to 40°C). The EBU is Title 20 compliant.


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


26W

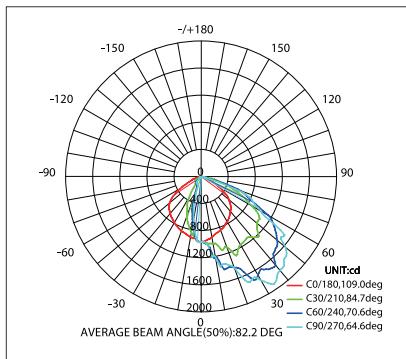


38W

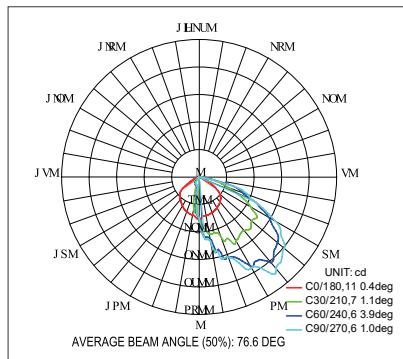


52W

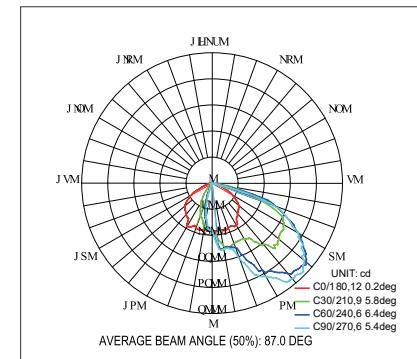


80W

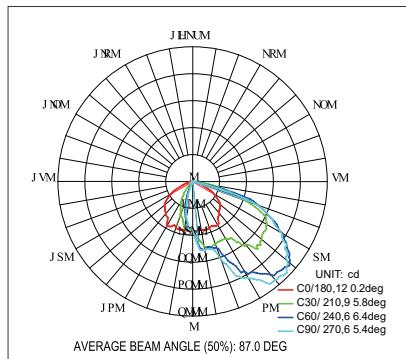

100W

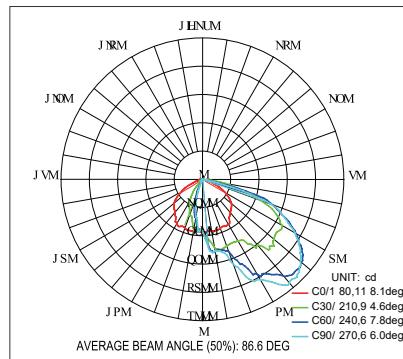

120W

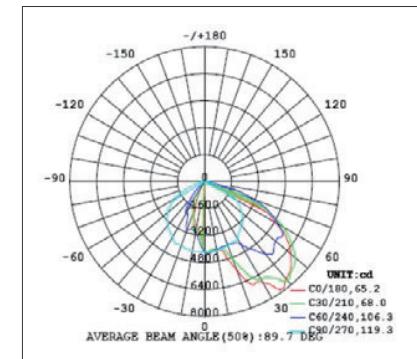

ORDERING INFORMATION

EXAMPLE: WL26501

WL					
Series	Wattage	CCT	Voltage	Control	Finish
WL	26	30	1	MS-L3B	BLANK
	26W ⁴	3000K	120V-277V	Wattstopper Motion Sensor ²	Dark Bronze ⁵
	38	40		MS	<i>* Custom finish options available at an additional charge.</i>
	38W ⁴	4000K		PIR Motion Sensor ²	
	52	50		PC	
	52W	5000K		Photo Control	
	70	30	1	SRP	
	80W	3000K	120V-277V	Bluetooth sensor receptacle ³	
	100	40	6		
	100W	4000K	347V/ 480V ¹		
	120	50			
	120W	5000K			

NOTE:

1. 347/480V is not available with photo control.
2. Motion Sensor is only available in 26W and 38W.
3. The Bluetooth PIR sensor need to be ordered separately and field installed. It is suitable for a max mounting height of 40ft Max.
4. Emergency Battery Back-up is available in 26W and 38W at 120-277V and works for a minimum of ninety (90) minutes.
5. Standard Finish is Dark Bronze. Additional charge will apply for Custom finish colors. Please contact Customer Service for details.

FEATURE



High quality die cast housing.



Durable chip and fade resistant powder coat finish.




Separated driver compartment minimize heat and enables high working temperature.



Adjusted arm.

FEATURE



150° swivel design.



Wattstopper Sensor,
photocontrol and
Emergency Battery
Back-up available.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	Measured Watts	AC Input 120V	CCT	CRI	LPW
26W	3860lm	26W	0.23A	4000K/5000K	>70	138
38W	5740lm	41W	0.34A	4000K/5000K	>70	140
52W	7780lm	54W	0.45A	4000K/5000K	>70	144
80W	11240lm	77W	0.64A	4000K/5000K	>70	146
100W	15000lm	103W	0.86A	4000K/5000K	>70	145
120W	17000lm	118W	0.98A	4000K/5000K	>70	144

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the LED strip in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	0	10,000	15,000	27,000	105,000
Lumen Maintenance Factor	1.0	0.98(L98)	0.96(L96)	0.92(L92)	0.70(L70)

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -4°F to 104°F (-20°C to 40°C).

Ambient		
Celsius	Fahrenheit	Multiplier
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99

System Wattage	Max THD(%)	Power Factor @120V	Power Efficiency	Replaces/ Equiv.(MH)
26W	20	>0.98	85%	150W
38W	20	>0.98	88%	175W
52W	20	>0.98	90%	250W
80W	20	>0.98	92%	320W
100W	20	>0.98	92%	400W
120W	20	>0.98	92%	400W

Effective Project Area

26W/38W EPA= 0.68 max (depending on mounting type)

52W/80W/100W/120W EPA=1.42 max (depending on mounting type)


BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
WL26501	B1-U1-G1
WL38501	B2-U1-G1
WL52501	B1-U1-G1
WL70501	B2-U1-G2
WL100501	B3-U1-G2
WL120501	B3-U2-G2

MOTION SENSOR (Wattstopper Motion Sensor)

The fixture with motion sensor raises or lowers the electric lighting level to high, low or off based on motion and/or daylight contribution. Typically, once the sensor stops detecting movement and the time delay elapses, lights will first fade to low mode, and eventually switch off. When motion is detected, the sensor ramps the light level to high mode unless the daylight contribution is sufficient. The integral photocell can also switch the lights on and off for dusk to dawn control, so that lighting remains on overnight even without motion detection.

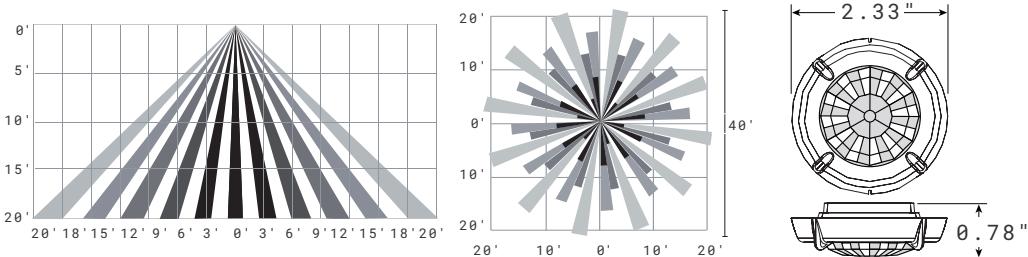

The L3B provides maximum coverage of 40 feet diameter mounted at 20 feet. Please see left drawing for lens side and top coverage and dimension.

Note:

1. For more details or setting, please contact customer service.

BLUETOOTH PIR MOTION SENSOR


Bluetooth Mesh Control




Model No.	Description	Input Voltage	Output
BMS-M100-PIR-DC1-BLE-SR-Z10-BZ	Fixture Controller with 0-10V Dimming, PIR Motion Sensor, Bluetooth Mesh in BlueMesh®, standard Dark Brown Color.	12-24VDC	Control High 0-10V Dimming
BMS-M110-PIR-DC1-BLE-SR-Z10-BZ	Fixture Controller with 0-10V Dimming, PIR Motion Sensor, Light Sensing, Bluetooth Mesh in BlueMesh®, standard Dark Brown Color.	12-24VDC	Control High 0-10V Dimming
BMS-M100-PIR-DC1-BLE-SR-Z10-WH	Fixture Controller with 0-10V Dimming, PIR Motion Sensor, Bluetooth Mesh in BlueMesh®, White Color, BlueMesh technology partner.	12-24VDC	Control High 0-10V Dimming
BMS-M110-PIR-DC1-BLE-SR-Z10-WH	Fixture Controller with 0-10V Dimming, PIR Motion Sensor, Light Sensing, Bluetooth Mesh in BlueMesh®, White Color.	12-24VDC	Control High 0-10V Dimming
BMS-M100-PIR-DC1-BLE-SR-Z10-BK	Fixture Controller with 0-10V Dimming, PIR Motion Sensor, Bluetooth Mesh in BlueMesh®, Black Color.	12-24VDC	Control High 0-10V Dimming
BMS-M110-PIR-DC1-BLE-SR-Z10-BK	Fixture Controller with 0-10V Dimming, Light Sensing, Bluetooth Mesh in BlueMesh®, Black Color.	12-24VDC	Control High 0-10V Dimming
LS01-LB-F3-XX	360° Low Bay Lens, maximum coverage 60ft diameter at 30ft and 40ft height – replace –XX with –BN for Brown finish, -BK for Black finish or –WT for Brown finish.		
LS01-HB-F3-XX	360° High Bay Lens, maximum coverage 80ft diameter at 30ft-40ft height – replace –XX with –BN for Brown finish, -BK for Black finish or –WT for Brown finish.		

DETECTION AREA

High Bay Lens - Top View at 8 ft

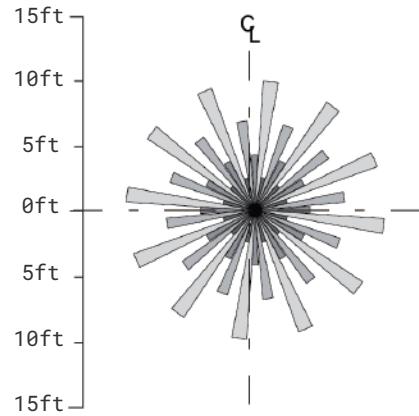


Side View

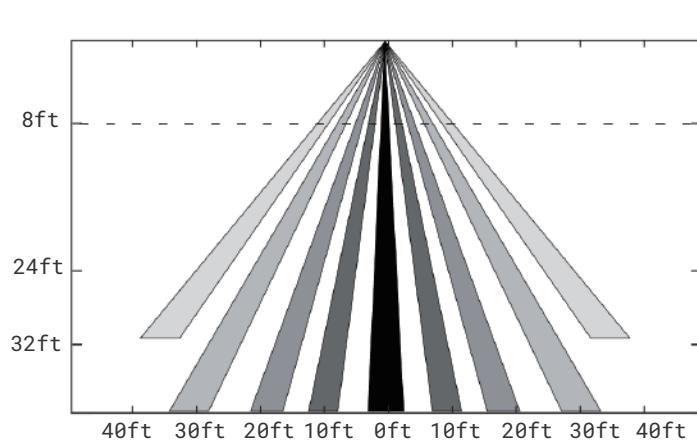


Ref#: 20251229

Low Bay Lens - Top View at 8 ft

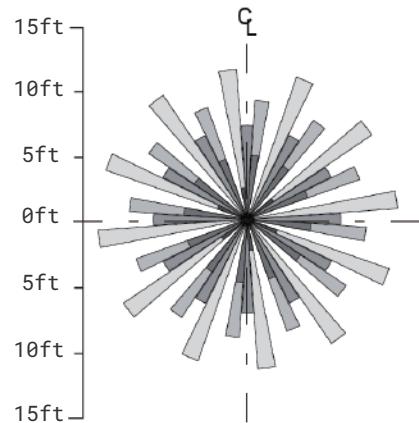

Side View

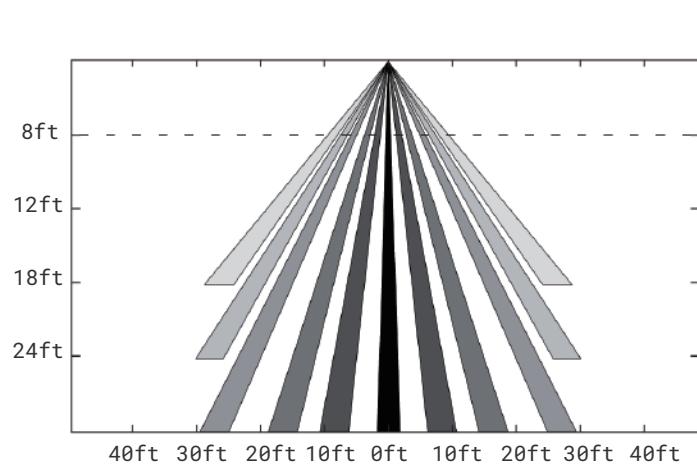

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.