




3W LED Step/Wall Lights are available in a horizontal configuration for mounting into a junction box. For poured concrete and masonry installations. For indoor and protected outdoor use.

## TECHNICAL DATA

<b>Wattage</b>	3W
<b>CCT</b>	3000K
<b>Dimming</b>	Non-Dimming
<b>CRI</b>	80
<b>Input Voltage</b>	120V, 50/60Hz
<b>Projected Lifetime</b>	L70-100,000 Hours
<b>Operating Temp.</b>	-13°F to 95°F (-25°C to 35°C)
<b>Certifications</b>	ETL listed Suitable for wet locations RoHS compliant
<b>Power Factor</b>	>0.87

## SPECIFICATION

### Dimension

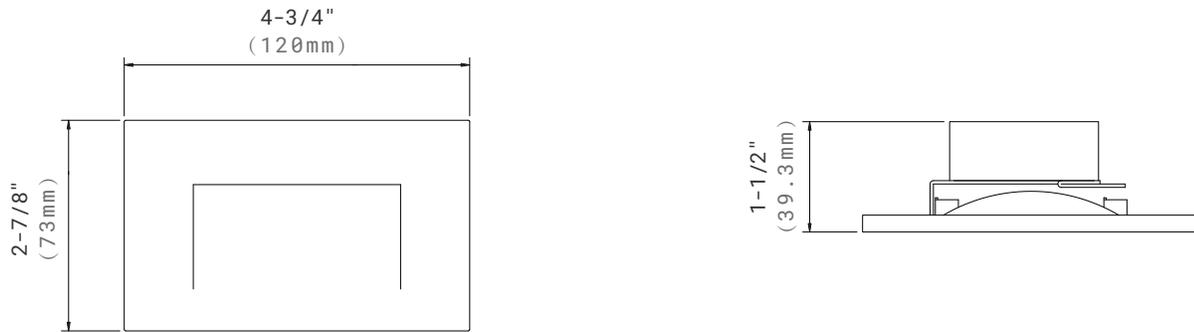

## ORDERING INFORMATION

EXAMPLE:HMSL03304-BK

Model	Wattage	CCT	Voltage	Controls	Finish
HMSL	03 3W	30 3000K	4 120V	BLANK On/Off	BK <sup>1</sup> Black <sup>1</sup>

### NOTE:

1. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
2. Minimum order required, please contact Customer Service for additional information.


## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CCT	CRI
3W	100lm	0.09A	3000K	80

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

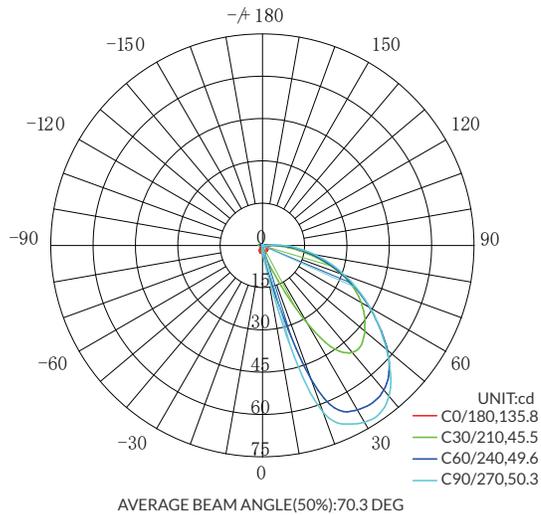

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
HMSL03304	B0-U1-G0

## WARRANTY

5 year limited warranty.

Specifications subject to change without notice.