

The RVAN LED Bath and Vanity Light looks modern and up to date. It has brushed nickel stainless steel base and PMMA white diffuser. 3000K, 4000K and 5000K selectable. It brings you a bright and beautiful bathroom.

TECHNICAL DATA


<u>Wattage</u>	25W, 30W, 35W,
<u>Lumen Output</u>	2500lm, 3000lm, 3500lm
<u>CCT</u>	Selectable 3000K/4000K/5000K default setting: 4000K
<u>Length</u>	24inch, 36inch, 48inch
<u>Driver</u>	Triac dimming
<u>CRI</u>	80
<u>Input Voltage</u>	120V, 50/60Hz
<u>Projected Lifetime</u>	L70-50,000 Hours
<u>Operating Temp.</u>	-4°F to 104°F (-20°C to 40°C)
<u>Certifications</u>	ETL Listed RoHS compliant Suitable for damp locations
<u>Power Factor</u>	>0.9 at full load
<u>Harmonic Distortion</u>	<20% at full load

FEATURES

- Material & Design:** Brushed nickel stainless steel, white PMMA diffuser.
- Function & Compatibility:** Wattage and CCT selectable, 120V triac dimmable, compatible with various J-box, suitable for damp locations.

SPECIFICATION

Dimension

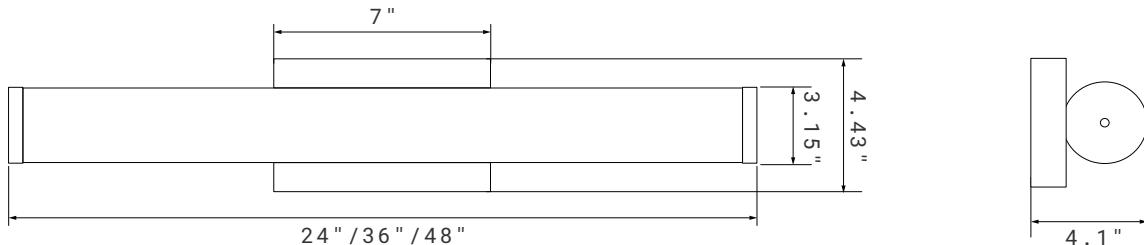

ORDERING INFORMATION

EXAMPLE: RVAN24-25SW804-BN

RVAN							
Series	Size	Wattage	CCT	CRI	Voltage	Dimming	Finish ²
RVAN	24 24"	25 25W	SW ¹ Selectable 3000K 4000K ¹ 5000K	80 80CRI	4 120V	BLANK Traic dimming driver	BN Brushed Nickel ²
	36 36"	30 30W					
	48 48"	35 35W					

NOTE:

1. 4000K is default setting.
2. Brushed nickel is standard. Custom trim colors are available at an additional charge. Please contact the Customer Service for details.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.


Lumen Output

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
25W	2500lm	0.21A	4000K	80	100
30W	3000lm	0.25A	4000K	80	100
35W	3500lm	0.29A	4000K	80	100

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

Ref#: 20260210

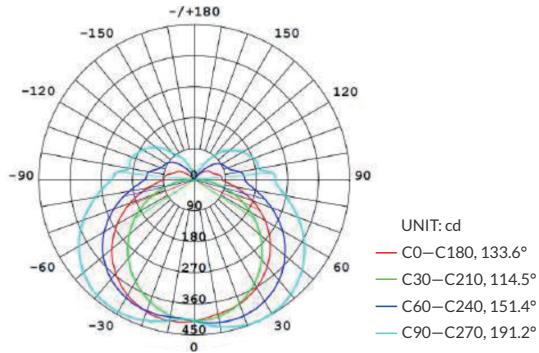

AVERAGE BEAM ANGLE(50%): 147.7 DEG

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.