



The Soar Pendant Light is designed with two advanced Mitsubishi light guide plates to achieve uniform and anti-glare lighting effect. Elegant appearance looks like flashing wings are soaring in the sky. The middle structure is made of aerometal, super sturdy and corrosion-resistant. It is perfect for applications that include conference rooms, open offices, retail settings, or anywhere you want to make a statement.

TECHNICAL DATA

Wattage	60W
CCT	Selectable 3000K/3500K/4000K
Driver	0-10V Dimming
CRI	80 is standard 90 is optional
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load


FEATURES

- Mitsubishi light guide plates.
- Sturdy and corrosion-resistant aerometal structure.
- Direct and indirect distribution.
- Transparent flashing wings appearance.

SPECIFICATION

Dimension

Wire Cord Length: 5ft (field adjustable)
 Aircraft Cable Length: 5ft (field adjustable)
 Net Weight: 11.9lbs (5.4kg)

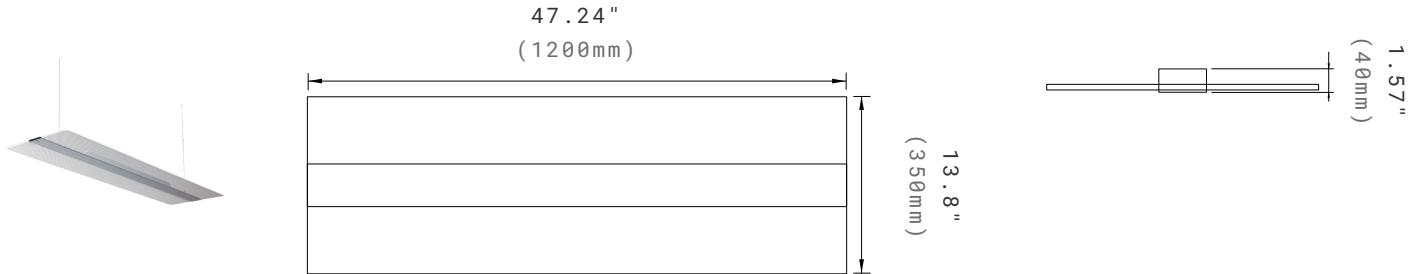

ORDERING INFORMATION

EXAMPLE: SOAR60-SW-801


SOAR							
Series	Wattage	CCT	CRI	Voltage	Controls	Finish	
SOAR	60 60W	SW ¹ Selectable 3000K ¹ 3500K 4000K	80 ² 80Ra ² 90 ² 90Ra ²	1 120-277V	BLANK 0-10V Dimming	BLANK ³ White ³ (RAL9016)	

NOTE:

1. 3000K is default setting.
2. 80 CRI is standard. 90 CRI can be available for an additional fee. Please contact Customer Service.
3. White finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

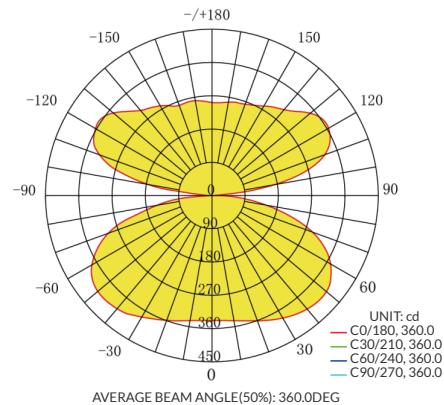

Uplight 60% / Downlight 40%

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
60W	7000lm	0.50A	4000K	80	117

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.

Ref#: 20260202