

SOLID RECTANGULAR

Recessed Step And Wall Light



**DARKSKY
APPROVED**
Reduces Light pollution
Certified by DarkSky.org

Compact and inconspicuous design with asymmetrical light distribution, directing light downward, minimizing uplight while revealing the texture of the stepped baffle. Open faceplate and louver faceplate available. Diecast aluminum housing, silicone rubber gasket, tempered glass, akzoNobel powder coating. Heavier powder coating optional for marine ambient corrosion resistance. Ideal for the illumination of ground surfaces, building entrances, stairs and footpaths.

TECHNICAL DATA


Wattage	6W/7W/8W/10W/20W
CRI	80
CCT	3000K, 4000K
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Driver	
Standard	Non dimming
Optional	0-10V dimming
Certifications	cETL Listed
	RoHS compliant
	DarkSky Approved (Only 3000K)
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP65-Standard
	IP67-Optional

FEATURES


- **Housing Construction:** Heavy duty cast aluminum housing with tempered glass lens. Open/lower faceplate options available.
- **Mounting System:** Stainless steel pre-installed housing with marine grade treatment available.
- **Optical Performance:** Asymmetrical light distribution pattern.

SPECIFICATION

6W/7"

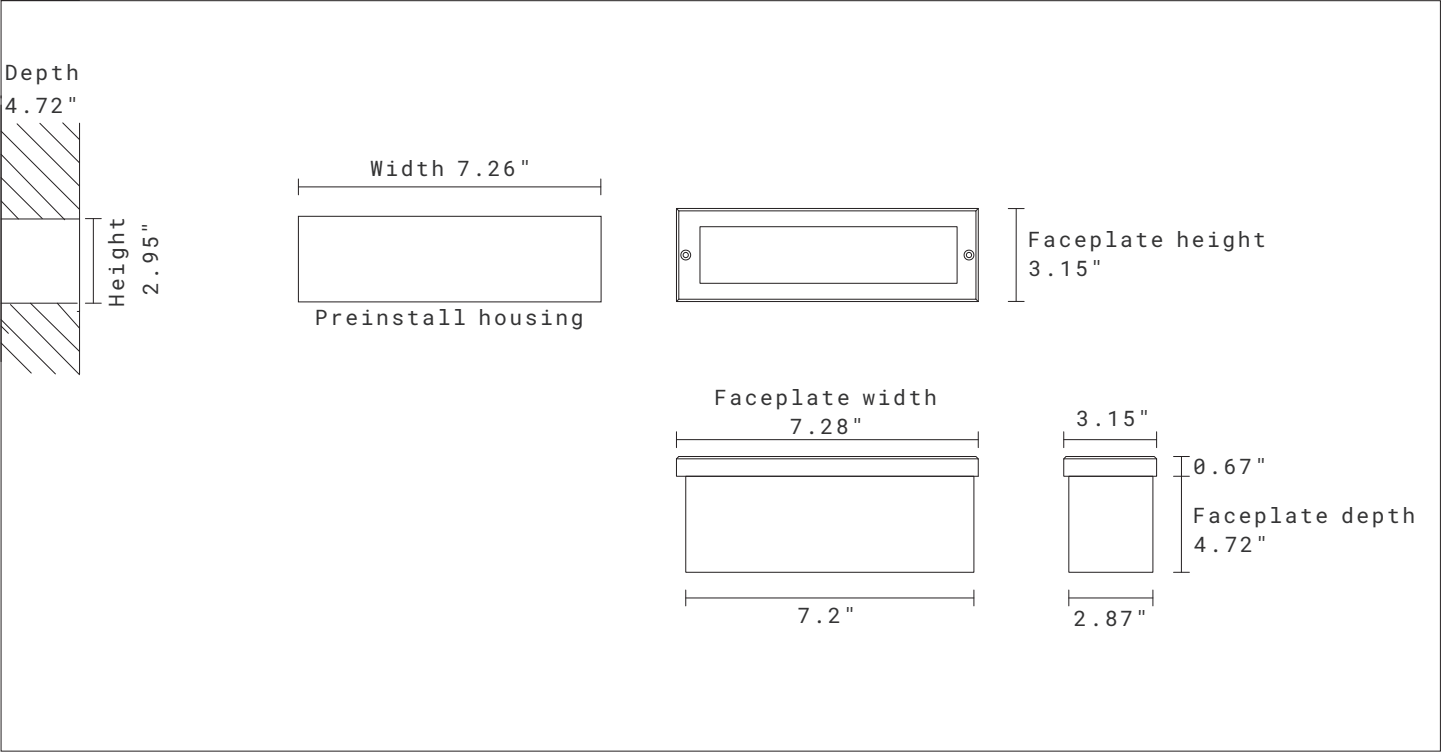


7W/9"

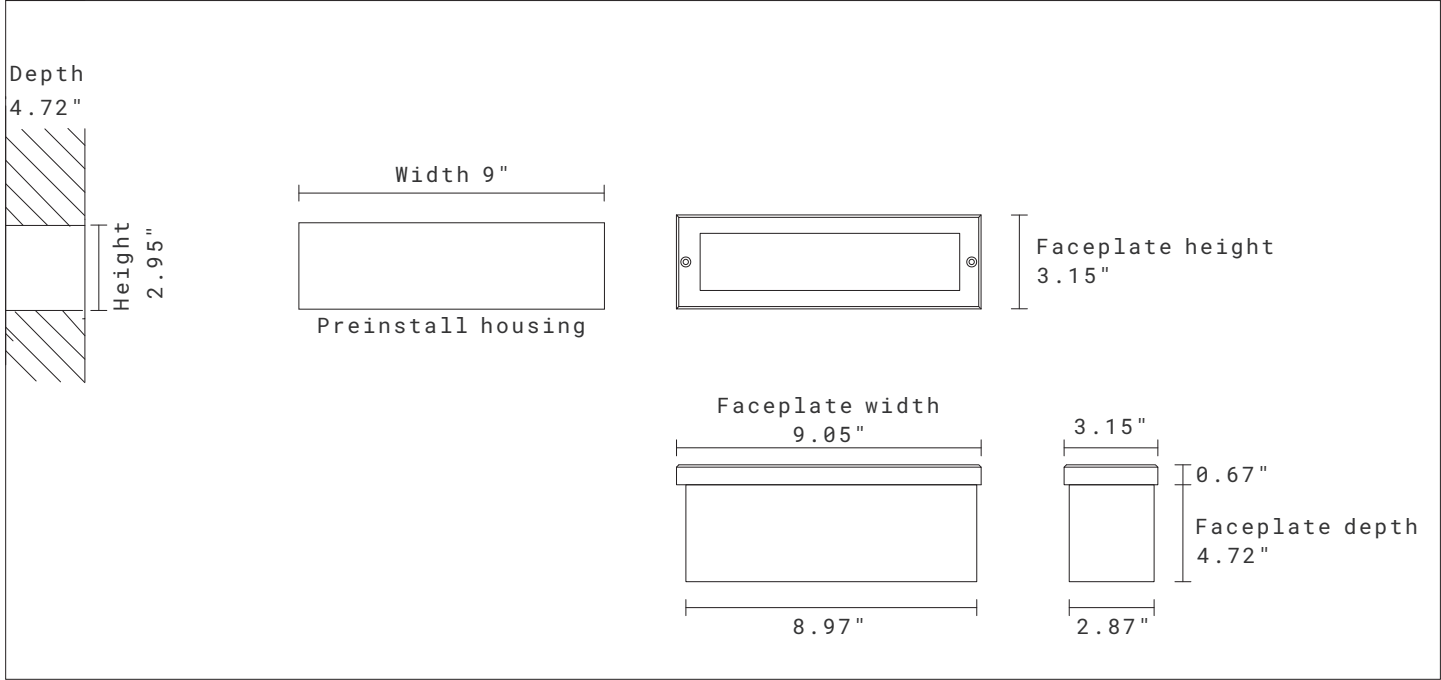


SPECIFICATION

8W/10"

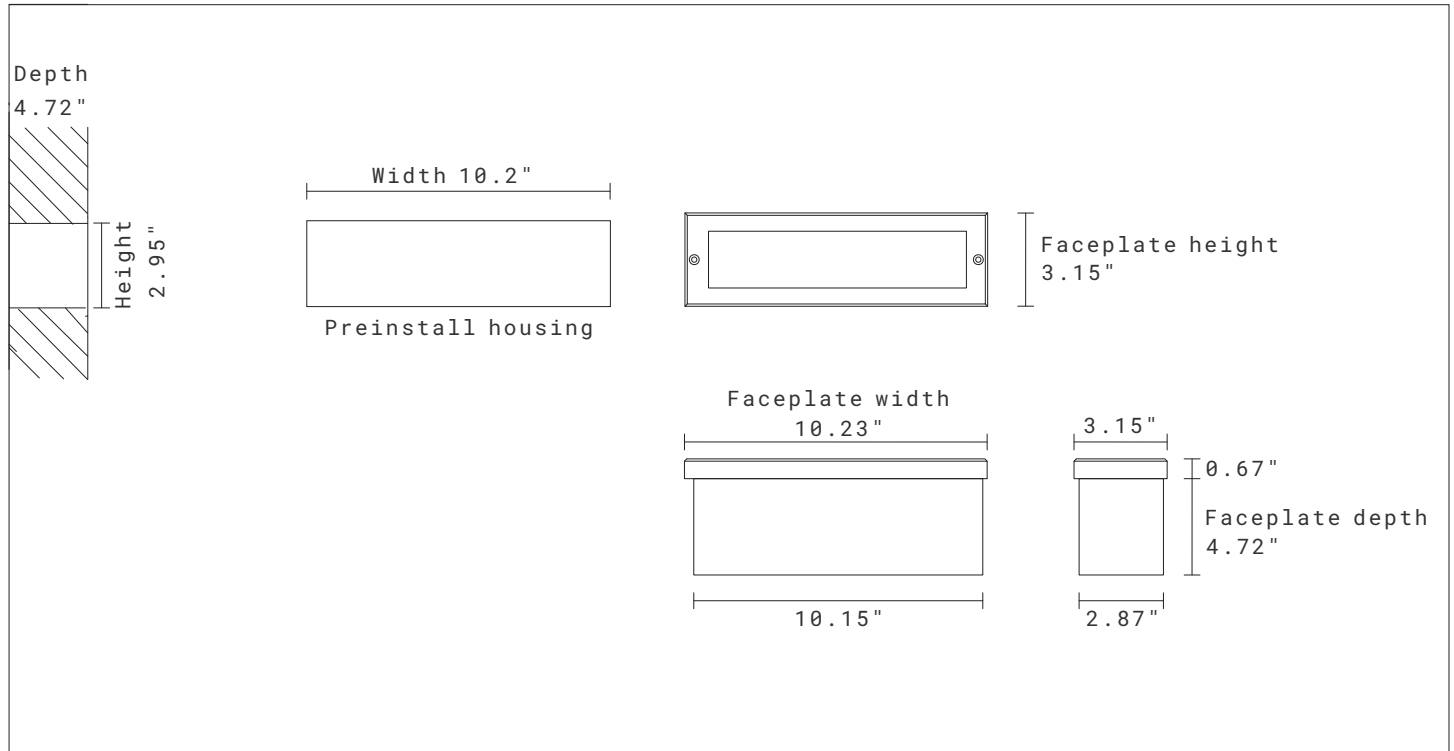

10W/20W/12"

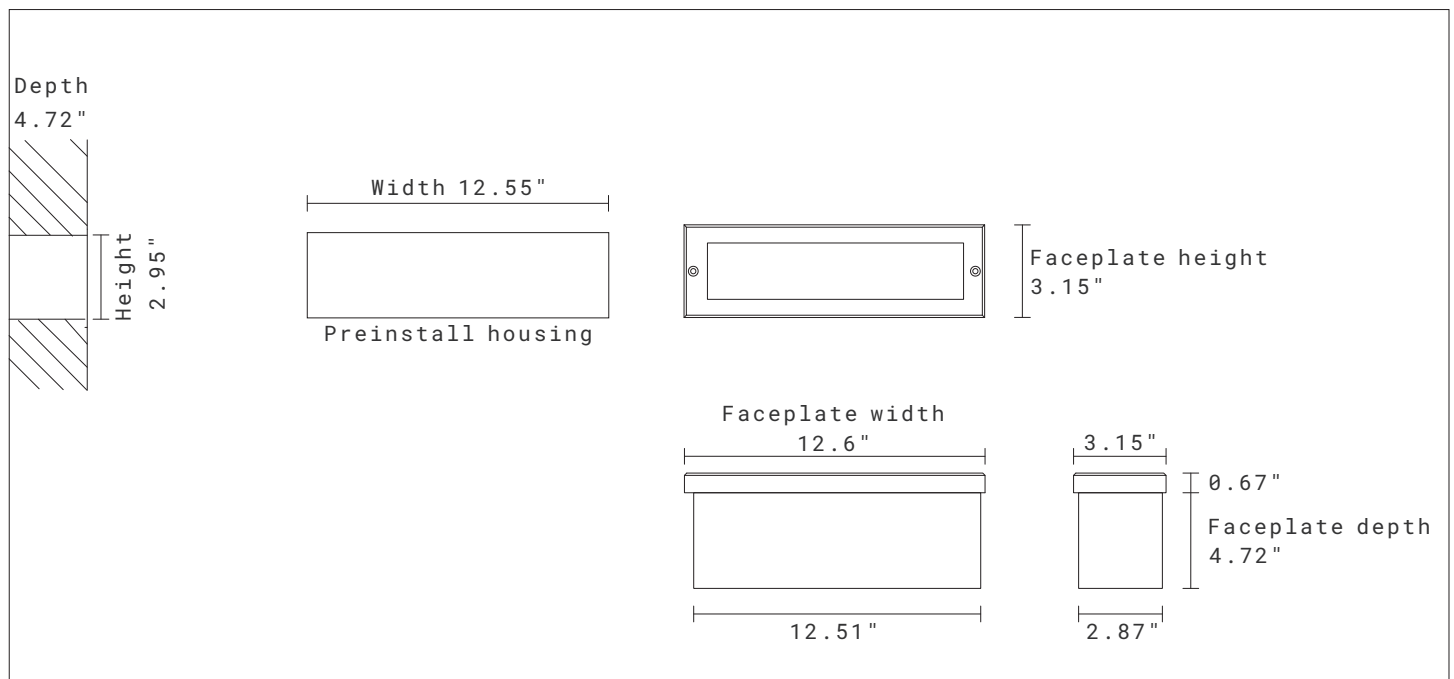

SOLID RECTANGULAR

Recessed Step And Wall Light

ORDERING INFORMATION


EXAMPLE: SRWL0607-301-RM-OP-BK

SRWL								
Series	Wattage/ Size	CCT	Voltage	Control	Installation	Faceplate	Faceplate Finish	Option
SRWL	0607 6W/7"	30 3000K	1 120-277V ¹	BLANK On/Off	RM Recessed	OP Open LV Louver	<i>Standard</i> BK Black ³ RAL9011	BLANK None
	0709 7W/9"	40 4000K					<i>Optional</i> WH White RAL9016	M Marine ambient corrosion resistance
	0810 8W/10"	R Red					GY Gray RAL7012	D 0-10V Dimming ¹
	1012 10W/12"	G Green					BZ Bronze	IP67 IP67 rated
	2012 20W/12"	B Blue					SL Silver RAL9006	

NOTE:

- 0-10V dimming is not available for 6W.
- Please choose the preinstall box in following Accessory Table.
- Black finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

ACCESSORIES (ORDERED SEPARATELY AND FIELD INSTALLED)



91405

SRWL-7IN-PBOX

Preinstall box for
7" SRWL step light.

91406

SRWL-9IN-PBOX

Preinstall box for
9" SRWL step light.

91407

SRWL-10IN-PBOX

Preinstall box for
10" SRWL step light.

91408


SRWL-12IN-PBOX

Preinstall box for
12" SRWL step light.


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

Open Faceplate

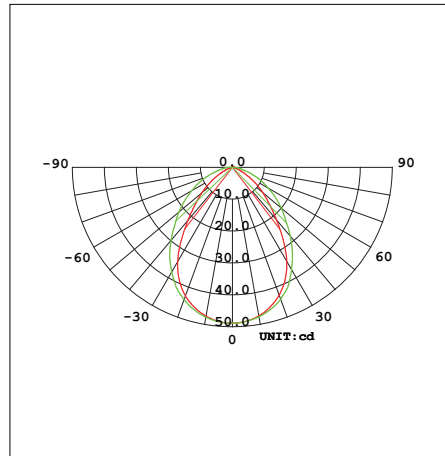

Louver Faceplate

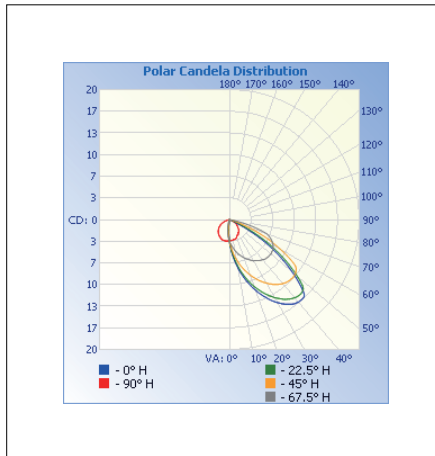

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Open Faceplate

Nominal Wattage	Measured Wattage	Size	Delivered Lumen	CCT	CRI
6W	5W	7"	94lm	3000K	80
7W	6W	9"	110lm	3000K	80
8W	8W	10"	132lm	3000K	80
10W	12W	12"	136lm	3000K	80
20W	20W	12"	344lm	3000K	80

Louver Faceplate

Nominal Wattage	Measured Wattage	Size	Delivered Lumen	CCT	CRI
6W	5W	7"	18lm	3000K	80
7W	6W	9"	25lm	3000K	80
8W	8W	10"	74lm	3000K	80
10W	9W	12"	31lm	3000K	80
20W	20W	12"	73lm	3000K	80

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.