

# STRAIGHT MAGNETIC TRACK LIGHT

## Bell Pendant



The Bell Pendant is for decoration and general lighting. Elegant body coating. 65° beam angle. Comfortable lighting without glare. Thanks to the length adjustable cable, the magnetic pendant works smooth in different spaces.

### TECHNICAL DATA

Wattage	10W
Input Voltage	24VDC
Beam Angle	65°
CCT	2700K, 3000K, 3500K, 4000K
CRI	90Ra
Driver	Triac, 0/1-10V
Certifications	cETL Listed RoHS compliant
Installation	Magnetic
Environment	Indoor



Magnetic Track Profile



Magnetic Track Profile  
Recessed with Flange

#### NOTE:

Straight Magnetic Track Profile sold separately.

### ORDERING INFORMATION


EXAMPLE: BEL10-3090-24V-65-MTM-BK

BEL						
Series	Wattage	CCT&CRI	Voltage	Beam Angle	Installation	Finish
BEL	10 10W	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24V <sup>1</sup> 24VDC <sup>1</sup>	65 65 degree	MTM Magnetic Track Mount	BK <sup>2</sup> Black <sup>2</sup> <i>Optional</i> WH <sup>2</sup> White <sup>2</sup>

**NOTE:**


1. The fixture is used for 24V magnetic track system.
2. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

### DIMENSION

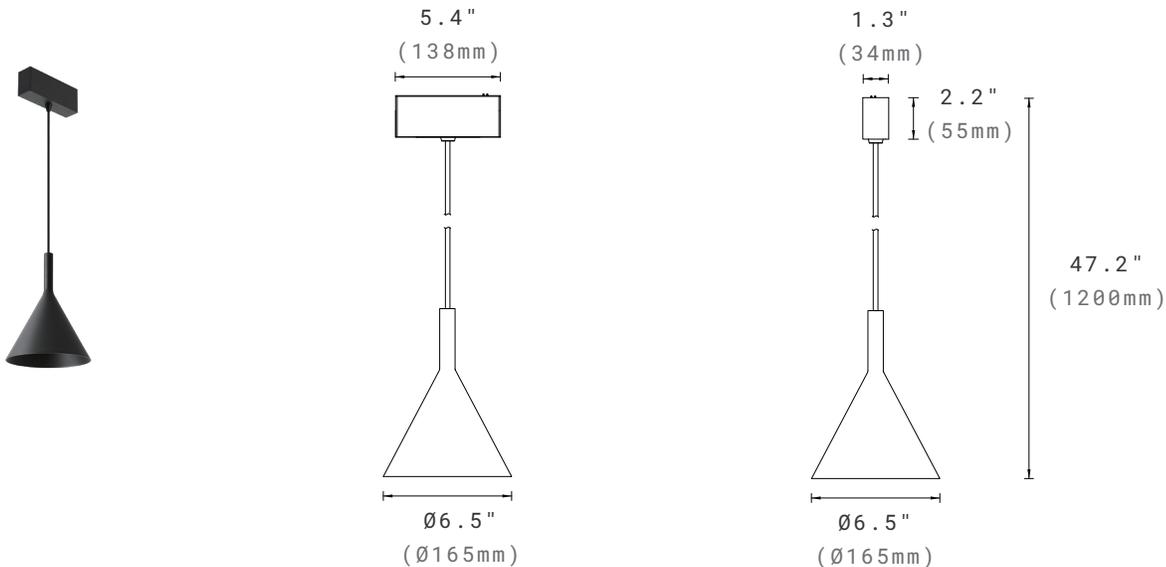

### PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.



h(m)	E(lx)	Φ(m)
1	500	Φ1.20
2	125	Φ2.40
3	55.6	Φ3.60
4	31.2	Φ4.80
5	20	Φ6.00

### PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Beam Angle	Lumen Output	CRI	CCT	LPW
10W	65°	480lm	90	3000K	48

### WARRANTY

5 years limited warranty.

Specifications subject to change without notice.