

# CURVE MAGNETIC TRACK LIGHT

## Glowball



Our Curve Glowball Series Magnetic Track Light is designed for decorative and general lighting. The diffuse spherical glass lens yields a smooth uniform light output, and the fixture is available as both a pendant or surface mounted to our 24V magnetic track system.

### TECHNICAL DATA

<b>Wattage</b>	5W
<b>Input Voltage</b>	24VDC
<b>Lens</b>	Diffused
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	90
<b>Driver</b>	Triac, 0/1-10V
<b>Certifications</b>	cETL Listed RoHS compliant
<b>Installation</b>	Magnetic
<b>Environment</b>	Indoor

**NOTE:**

Curve Magnetic Track Profile sold separately.

### ORDERING INFORMATION

EXAMPLE: CGBL05-3090-24V-SM-BK


CGBL Series	Wattage	CCT&CRI	Voltage	Lens	Installation	Finish
CGBL	05 5W	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24V <sup>1</sup> 24VDC <sup>1</sup>	BLANK Diffused	SM Surface Magnetic Track Mount	BK <sup>2</sup> Black <sup>2</sup> <i>Optional</i> WH <sup>2</sup> White <sup>2</sup>

**NOTE:**

1. The fixture is used for 24V magnetic track system.
2. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

### DIMENSION

**5W**

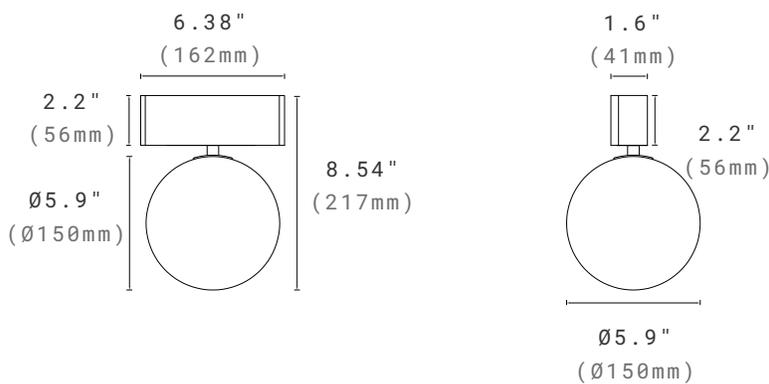


## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

2700K 80Ra

**Diffuse**

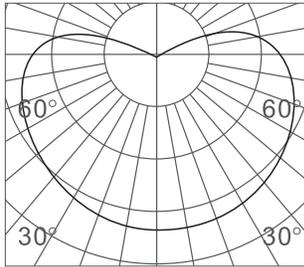

h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lens	Lumen Output	CRI	CCT	LPW
5W	Diffused	350lm	90	3000K	70

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.