

STRAIGHT MAGNETIC TRACK LIGHT

Glowball



Our Glowball Series Magnetic Track Light is designed for decorative and general lighting. The diffuse spherical glass lens yields a smooth uniform light output, and the fixture is available as both a pendant or surface mounted to our 24V magnetic track system.

TECHNICAL DATA

Wattage	5W
Input Voltage	24VDC
Lens	Diffused
CCT	2700K, 3000K, 3500K, 4000K
CRI	90Ra
Driver	Triac, 0/1-10V
Certifications	cETL Listed RoHS compliant
Installation	Magnetic
Environment	Indoor



5W Surface Mount



5W Pendant Mount

ORDERING INFORMATION

EXAMPLE: GBL05-3090-24V-SM-BK



GBL Series	Wattage	CCT&CRI	Voltage	Lens	Installation	Finish
GBL	05 5W	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24V ¹ 24VDC ¹	BLANK Diffused	SM Surface Magnetic Track Mount PM Pendant Magnetic Track Mount	BK ² Black ² <i>Optional</i> WH ² White ²

NOTE:


1. The fixture is used for 24V magnetic track system.
2. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

DIMENSION

5W Surface Mount

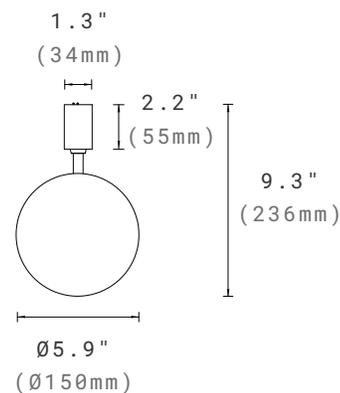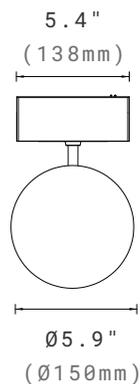

5W Pendant Mount

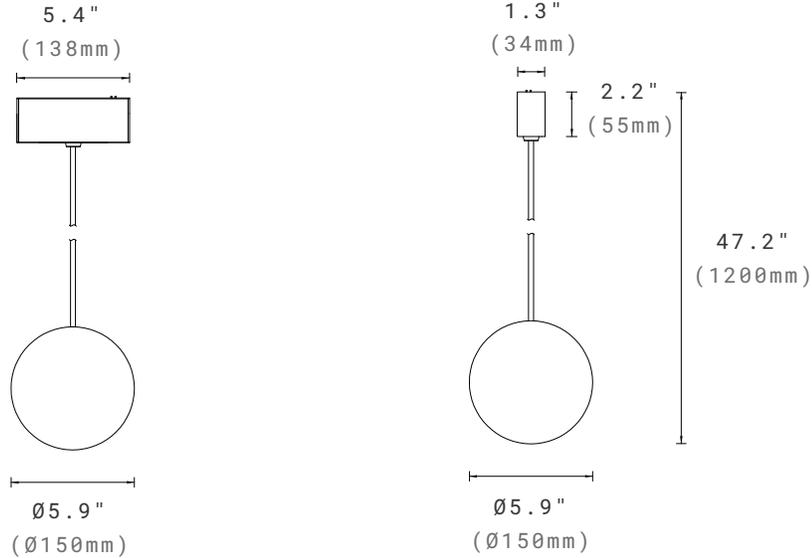


Ref#: 20260310

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

2700K 80Ra

Diffuse



h(m)	E(lx)	Φ(m)
1	24	Φ2
2	6	Φ4
3	2	Φ6
4	1	Φ8
5	0.9	Φ10

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lens	Lumen Output	CRI	CCT	LPW
5W	Diffused	290lm	90	3000K	58

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.