



**DARKSKY APPROVED**  
Reduces Light pollution  
Certified by DarkSky.org

The Pillar Round LED Pole Light is well constructed with high quality extruded aluminum, UV powder coated, featuring tempered safety glass, moulded silicone gasket and stainless steel screws. This impressive pole light is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

## TECHNICAL DATA

<b>Wattage</b>	25W, 45W
<b>CRI</b>	80-Standard
<b>CCT</b>	2700K, 3000K, 4000K
<b>Driver</b>	0-10V Dimming is standard
<b>Input Voltage</b>	120-277VAC, 50/60Hz
<b>Operating Temp.</b>	-40°F to 104°F (-40°C to 40°C)
<b>Certifications</b>	cETL Listed RoHS compliant DarkSky approved for CCT of 3000K and below
<b>Power Factor</b>	>0.9 at full load
<b>Harmonic Distortion</b>	<20% at full load
<b>Projected Lifetime</b>	L70 - 100,000 Hours
<b>IP Rating</b>	IP65
<b>EPA</b>	2.8ft <sup>2</sup>
<b>Wind Load</b>	Poles are rated for 180 mph allowable design wind speed (VASD). Please make sure the concrete base is strong enough to bear the pole weight and wind load.

## FEATURES


- **Durable Construction:** The robust protection system ensures exceptional corrosion and weather resistance, providing long term reliability in demanding environments.
- **Adjustability & Adaptability:** Customizable pole height and finish color.

## SPECIFICATION


### Dimension

#### Pillar Round Pole Light

Thickness: 0.118"

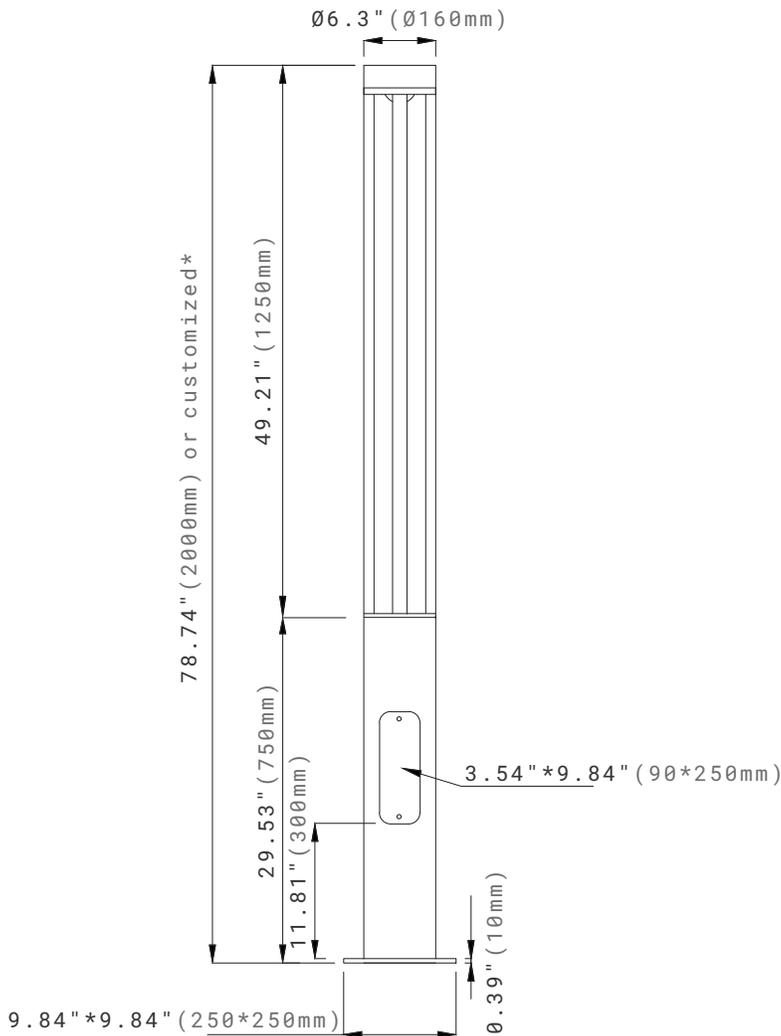

### Pole Base

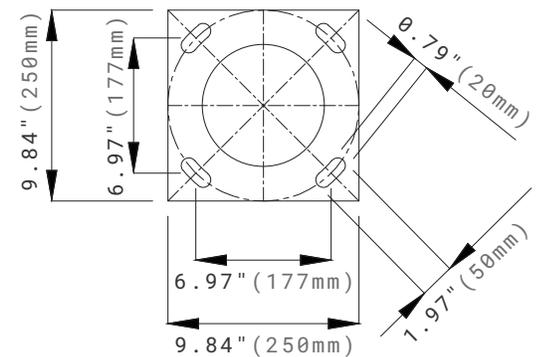

### NOTE:

1. Pole maximum height is 18ft (5.5 meters). Please confirm the final drawing with the Customer Service.

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	CRI
25W	1800lm	4000K	80
45W	3800lm	4000K	80

## ORDERING INFORMATION

### Standard Model

EXAMPLE: PRPL-4FT-4530801-BK

PRPL							
Series	Pillar Height	Wattage	CCT	CRI	Voltage	Control	Finish
PRPL	4FT 4.1 feet <sup>1</sup>	25 25W 45 45W	27 2700K 30 3000K 40 4000K	80 CRI80	1 120-277V	BLANK 0-10V Dimming Driver	BK Black <sup>2</sup>

### NOTE:

1. Pillar and pole height can be customized. Pole need to be ordered separately. Please check with Customer Service for details.
2. Standard Finish is Black. Custom colors might be available at an additional charge.

## ORDERING INFORMATION

**DarkSky-Approved Model**

EXAMPLE: PRPL-4FT-4530801-BK

PRPL Series	Pillar Height	Wattage	CCT	CRI	Voltage	Control	Finish
PRPL	4FT 4.1 feet <sup>1</sup>	25 25W 45 45W	27 2700K 30 3000K	80 CRI80	1 120-277V	BLANK 0-10V Dimming Driver	BK Black <sup>2</sup>

**NOTE:**


1. Pillar and pole height can be customized. Pole need to be ordered separately. Please check with Customer Service for details.
2. Standard Finish is Black. Custom colors might be available at an additional charge.

## ACCESSORIES (ORDER SEPARATELY)



**ABMK-PRPL-6T13FT**  
Anchor bolts mounting kits.  
for 6ft to 13ft Pillar Round Pole Light.


**ABMK-PRPL-15T18FT**  
Anchor bolts mounting kits.  
for 15ft to 18ft Pillar Round Pole Light.



**PRPL-2.5FT-POLE-BK**  
2.46 feet pole, black.  
\* Pole height and finish color can be customized.

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

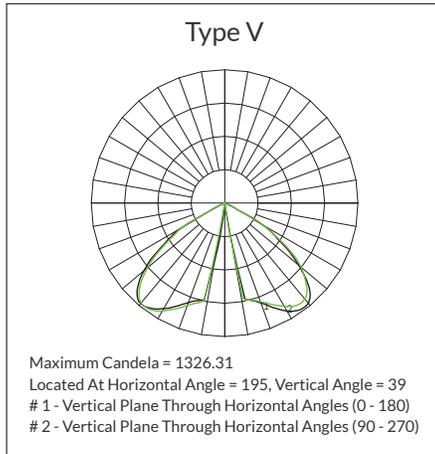

## BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
PRPL-2540801	B1-U0-G0
PRPL-4540801	B2-U0-G1

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.