

The SleekCake LED Light is with Edge-lit technology features even illumination and glare free with multiple size from 5 to 15 inches. Low profile appearance design solves the problem of limited plenum space. Ideal for Kitchens, Bathrooms, Hotels, Pools, Restaurants, Showers, Fitness Clubs, Showcases can also be used in a Night Club or on Staircases.

TECHNICAL DATA

CRI

Standard	80
Optional	90

CCT

Selectable 2700K/3000K/3500K/4000K/5000K

Input Voltage

Standard	120V, 50/60Hz
	120-277V, 50/60Hz

Operating Temp. -4°F to 104°F (-20°C to 40°C)

Driver Triac and 0-10V dimming

Certifications cULus Listed
RoHS compliant
Suitable for wet locations

Power Factor >0.9 at full load

Harmonic Distortion <20% at full load

Projected Lifetime L70 - 50,000 Hours

FEATURES

- **Elegant Design & Illumination:** Features a simple and elegant appearance with edge-lit technology for even illumination.
- **Versatile Performance & Compatibility:** Available in multiple sizes from 5 to 15 inches. 5 CCT selectable with Triac and 0-10V dimming options. Compatible with various junction boxes for retrofit downlight installation. IC rated for safe contact with insulation.

ORDERING INFORMATION


EXAMPLE: SKC05R-05LM-SW801-HL

SKC									
Name	Size	Shape	Brightness	CCT	CRI	Voltage	Controls	Finish	Version
SKC	05 5"	R Round	05LM 06LM	SW Selectable 2700K 3000K ² 3500K 4000K 5000K	80 80CRI ³ 90 90CRI ³	4 120V 1 120-277V	BLANK None	BLANK White ⁴	HL
	07 7"	R Round	06LM 09LM 11LM						
	09 9" ¹	R Round	13LM						
	12 12" ¹	R Round	15LM						
	15 15" ¹	R Round	17LM						

NOTE:

1. 9", 12" and 15" have MOQ, please contact Customer service for more information.
2. 3000K is default setting. If need other CCT please contact Customer Service in advance to change the setting in factory or change the setting in the field.
3. 80CRI is standard. 90 CRI can be available for an additional fee. Please contact customer service.
4. White finish is standard. Custom color is available for a premium setup fee. Consult customer service for additional information.

SPECIFICATION

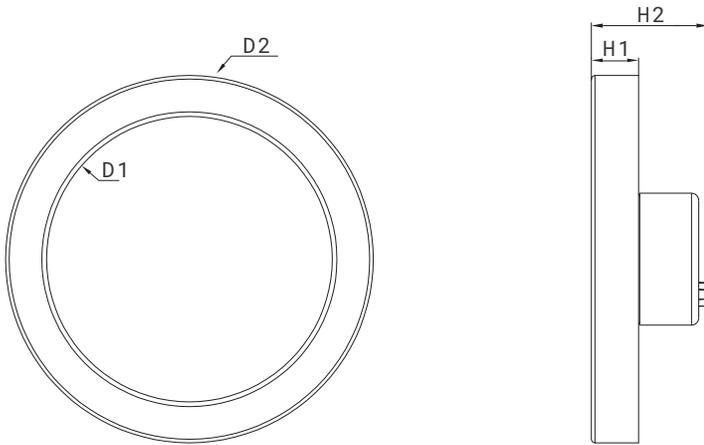

Model	D1	D2	H1	H2
SKC05R	Ø4.76"	Ø6.14"	0.8"	1.9"
SKC07R	Ø5.67"	Ø7.08"	0.8"	1.9"
SKC09R	Ø7.44"	Ø8.86"	0.8"	1.9"
SKC12R	Ø10.04"	Ø11.61"	0.8"	1.97"
SKC15R	Ø11.89"	Ø14.57"	0.94"	1.9"

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Brightness	Wattage	Lumen Output	Size	AC Input 120V	CCT	CRI	LPW
05LM	7W	550lm	5IN	0.06A	2700K	80	78
06LM	9W	650lm	5IN	0.08A	2700K	80	72
06LM	9W	650lm	7IN	0.08A	2700K	80	72
09LM	12W	950lm	7IN	0.10A	2700K	80	79
11LM	14W	1100lm	7IN	0.12A	2700K	80	78
13LM	17W	1300lm	9IN	0.14A	2700K	80	76
15LM	21W	1500lm	12IN	0.18A	2700K	80	71
17LM	25W	1700lm	15IN	0.21A	2700K	80	68

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.