



## TECHNICAL DATA


### Magnetic Track Profile

Material	Aluminum
Finish Color	RAL9004 Black/RAL 9003 White
Input Voltage	24VDC
Input Current	8A max.
Certifications	ETL listed RoHS compliant

## PACKAGE INFORMATION

Item	Qty/Ctn (pcs)	N.W/Ctn (kgs/lbs)	G.W/Ctn (kgs/lbs)	LxWxH (cm/inch)
1 Meter Profile	6	10.8kgs/ 23.81lbs	12kgs/ 26.46lbs	105cmx21cmx20.5cm/ 41.34"x8.27"x8.07"
2 Meter Profile	6	21.6kgs/ 47.62lbs	23.5kgs/ 51.81lbs	205cmx21cmx20.5cm/ 80.71"x8.27"x8.07"
3 Meter Profile	3	16.2kgs/ 35.71lbs	18kgs/ 39.68lbs	305cmx21cmx20.5cm/ 120.08"x8.27"x8.07"

## DIMENSION

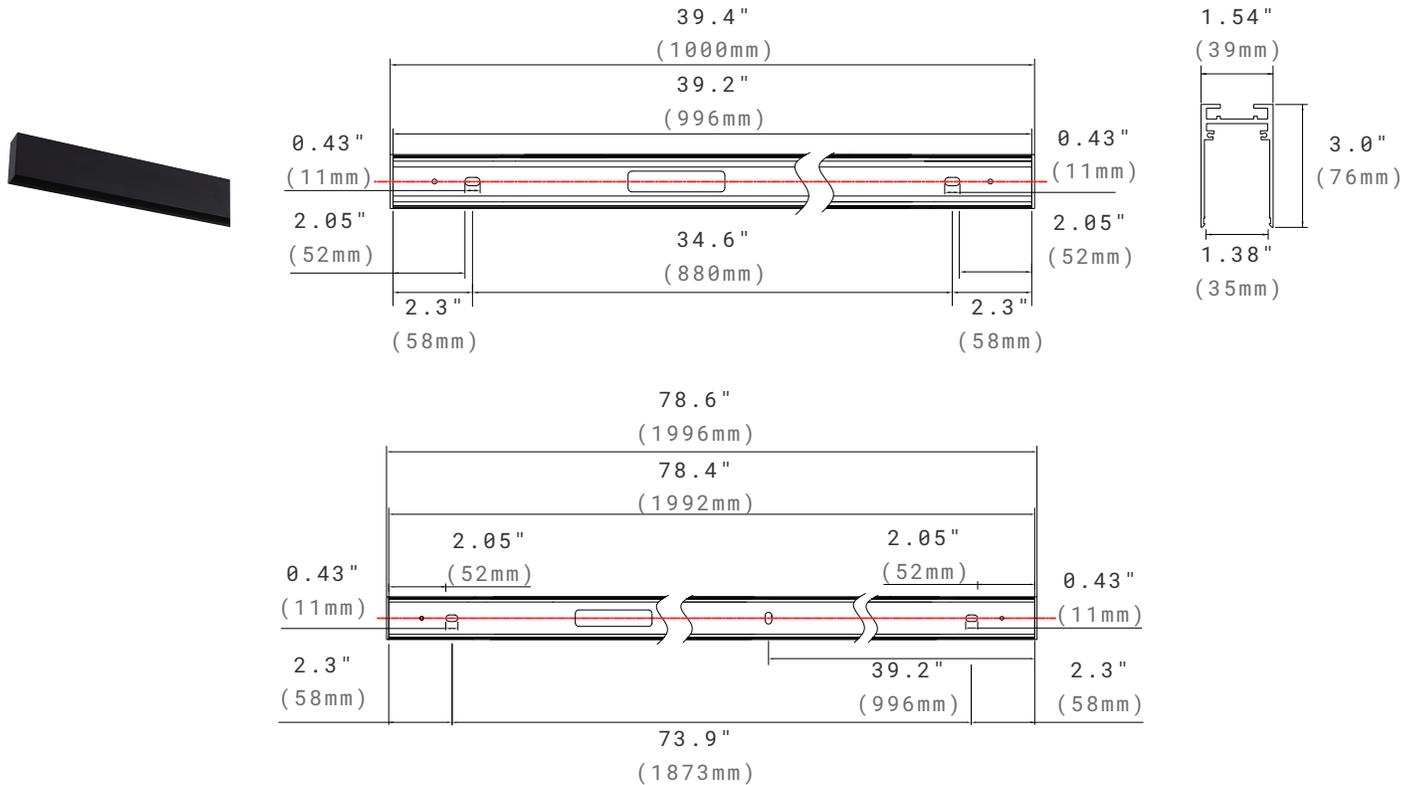

## ORDERING INFORMATION

EXAMPLE: MTS1M-24V-BK

MTS				
Series	Length <sup>1</sup>	Voltage	Installation	Frame Finish
MTS Magnetic Track Profile	1M 39"	24V <sup>2</sup> 24VDC <sup>2</sup>	Need to Order and Ship Separately <sup>3</sup>	BK <sup>4</sup> Black <sup>4</sup> <i>Optional</i> WH <sup>4</sup> White <sup>4</sup>
	2M 79"			
	3M 118"			
			PMK Pendant Mount Kits	
			SMK Surface Mount Kits	
			RMK Recessed Mount Kits	


**NOTE:**

1. 39" (1M) and 79" (2M) profiles are standard. Customer needs pay the shipping cost for 118" (3M) profile. Custom track length is optional. If for special track length and pattern demand, please contact Customer Service. Continuous run mount can't exceed 1968.5" (50 meters), otherwise voltage drop will occur.
2. 24V constant voltage LED drivers can be chosen in the following driver list or supplied by customer. The total fixture wattages can't exceed 300W.
3. Different mounting kits need to be bought separately. Please check the details in the following accessory list.
4. Black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

## ACCESSORIES (ORDERED AND SHIPPED SEPARATELY)

### CORNER


#### L Corner

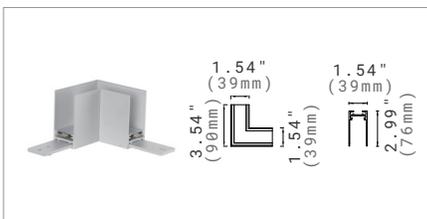

#### MTS-LC-BK

Sandy Black   
 Sandy White 


#### Inner Corner

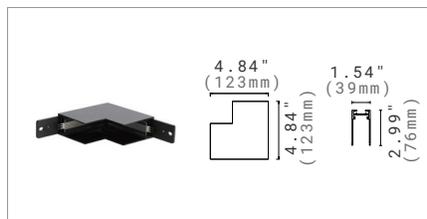

#### MTS-IC-BK

Sandy Black   
 Sandy White 


#### Outer Corner

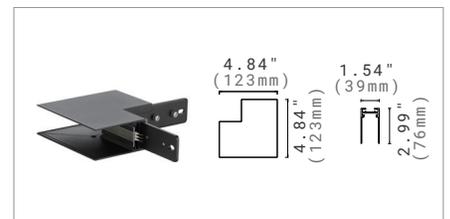

#### MTS-OC-BK

Sandy Black   
 Sandy White 

#### T Corner

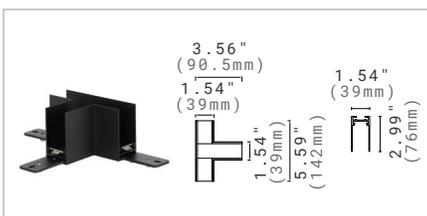

#### MTS-TC-BK

Sandy Black   
 Sandy White 


#### 45D Corner



#### MTS-VC-BK

Sandy Black   
 Sandy White 

#### Cross Corner

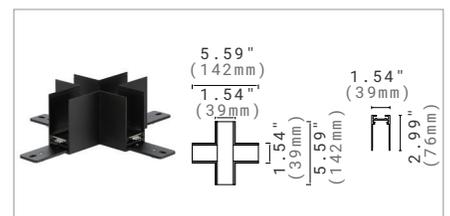


#### MTS-CC-BK

Sandy Black   
 Sandy White 

## MOUNTING

### Recessed Kits

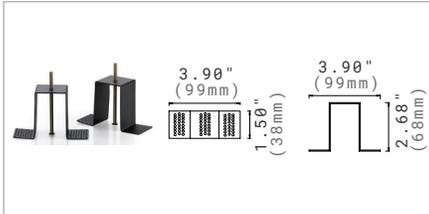

#### MTS-RM-BK


Recessed Mounting Kit for Magnetic Track

Sandy Black 

Sandy White 

\*2 Pieces Per Set.

### Pendant Kit-A

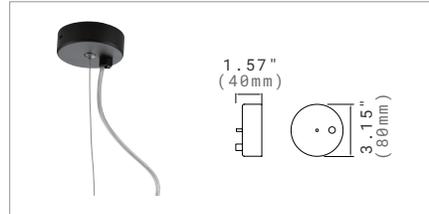


#### MTS-PM-A-BK

Suspension 47.2" (1.2meters) with Electrical Wire (1pc).

Sandy Black 

Sandy White 

### Pendant Kit-B

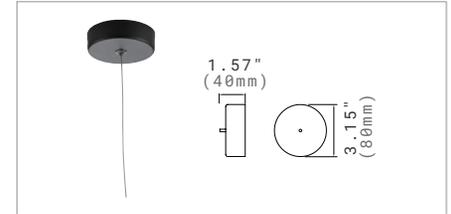


#### MTS-PM-B-BK

Suspension 47.2" (1.2meters) (1pc).

Sandy Black 

Sandy White 

### Track Connector

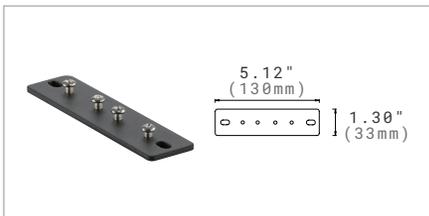

#### MTS-CNCT-BK


Profile Connection.

Sandy Black 

Sandy White 

\*The Track Connector Must Be Worked Together with Power Plate.

### Power Plate 2.56" (65mm)

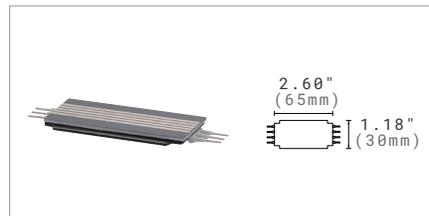

#### MTS-PP-65-BK

Electrical Connection, with 2 Pins.

Sandy Black 

Sandy White 

### Surface Mount Kits




#### MTS-SM-BK

Surface Mounted for Magnetic Track, includes 4pcs.

Sandy Black 

Sandy White 

### Track Cover

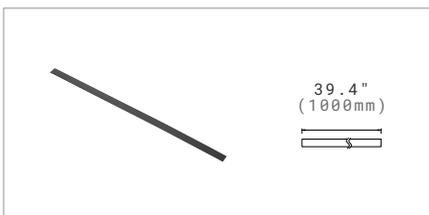


#### MTS-COVER-BK

Track Cover 1 Meter.

Sandy Black 

Sandy White 

### Driver Box

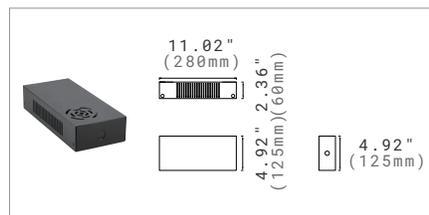

#### MTS-DBOX-BK

Empty Box.

Sandy Black 

Sandy White 

### Track Bridge



#### MTS-TB-BK

Current: Max 8A,

Power: Max 200W.

Sandy Black 

Sandy White 