

VRD VICKY RING LIGHT

Tri-Ring Pendant, Downward



The Vicky Ring Light is a unique ring style light with an LED light source illuminating downward. Aluminum body construction, combined with three different rings. The cable length can be adjustable.

TECHNICAL DATA

Wattage

TRI	40W, 50W, 80W
TRI2	50W, 80W, 100W
TRI3	40W, 80W, 120W
CCT	3000K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load


FEATURES

- Three ring lights combined.
- Cable length adjustable.
- Direct illumination.

SPECIFICATION

Dimension


Max Cable and wire cord length: 59" (1.5m)

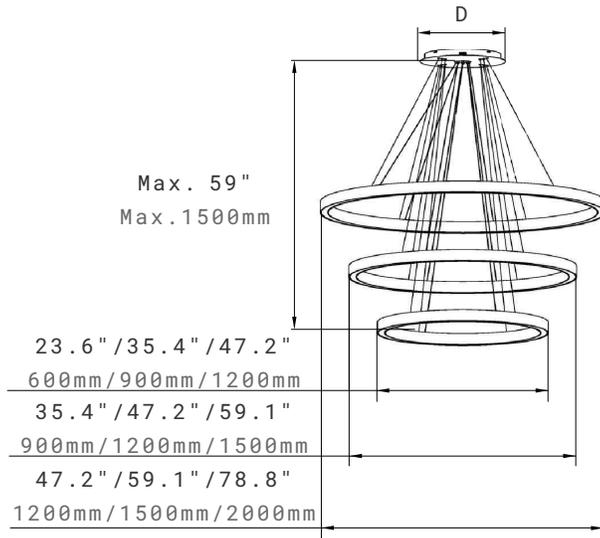

Mounting Canopy Dimension					
TRI		TRI2		TRI3	
Wattage/Diameter	D	Wattage/Diameter	D	Wattage/Diameter	D
40W/Ø23.6"(600mm)	14.0"(350mm)	50W/Ø35.4"(900mm)	18.0"(450mm)	40W/Ø23.6"(600mm)	20.0"(500mm)
50W/Ø35.4"(900mm)	14.0"(350mm)	80W/Ø47.2"(1200mm)	18.0"(450mm)	80W/Ø47.2"(1200mm)	20.0"(500mm)
80W/Ø47.2"(1200mm)	14.0"(350mm)	100W/Ø59.1"(1500mm)	18.0"(450mm)	120W/Ø78.8"(2000mm)	20.0"(500mm)

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

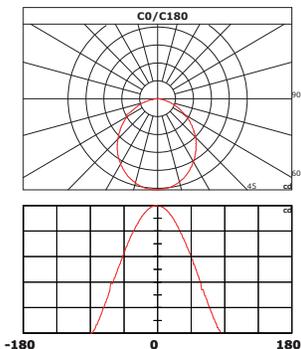

CIE Class: Direct
 Measurement Flux: 6740.0lm
 Efficiency: 86.22lm/W
 Central Intensity: 2607.667cd
 Max. Intensity: 2615.891cd
 Field Angle(10%max): 155.94, 154.95

VRD VICKY RING LIGHT

Tri-Ring Pendant, Downward

ORDERING INFORMATION

EXAMPLE: VRD-TRI-40901-ACPMK-WH

<input type="text" value="VR"/> 1. Series	<input type="text"/> 2. Light Emitting	<input type="text"/> 3. Acoustic Configuration	<input type="text"/> 4. Wattage/ Diameter	<input type="text"/> 5. CCT	<input type="text"/> 6. CRI	<input type="text"/> 7. Voltage
VR Vicky Ring	D Downward Light	BLANK Light without Acoustic	TRI¹ 40W/Ø23.6" 50W/Ø35.4" 80W/Ø47.2" TRI² 50W/Ø35.4" 80W/Ø47.2" 100W/Ø59.1" TRI³ 40W/Ø23.6" 80W/Ø47.2" 120W/Ø78.8"	30 3000K 40 4000K 50 5000K	90 90Ra	1 120V-277V
		<input type="text"/> 8. Installation	<input type="text"/> 9. Control	<input type="text"/> 10. Frame Finish		
		ACPMK Aircraft Cable Pendant Mount Kits	BLANK 0-10V Dimming	WH² White ² BK² Black ²		

NOTE:

1. Custom diameters and combinations are available.
2. White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
40W	3400lm	0.33A	4000K	90	85
50W	4250lm	0.42A	4000K	90	85
80W	6800lm	0.67A	4000K	90	85
100W	8500lm	0.83A	4000K	90	85
120W	10200lm	1.00A	4000K	90	85

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.