

# VRI VICKY RING LIGHT

## Inward, Acoustic Light



The Vicky Ring Light is a unique ring style light with an LED light source illuminating from its inner surface. It is available in sizes ranging from 23.6" (dia.) up to 59" (dia.). This design features aluminum body construction and an optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

### TECHNICAL DATA

<b>Wattage</b>	32W, 40W, 70W, 80W
<b>CCT</b>	3000K, 3500K, 4000K, 5000K
<b>Driver</b>	0-10V Dimming standard
<b>CRI</b>	90
<b>Input Voltage</b>	120-277V, 50/60Hz
<b>Projected Lifetime</b>	L70-100,000 Hours
<b>Operating Temp.</b>	-4°F to 104°F (-20°C to 40°C)
<b>Certifications</b>	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry location
<b>Power Factor</b>	>0.9 at full load
<b>Harmonic Distortion</b>	<20% at full load


### FEATURES

- Fixtures in diameters from 23.6" through 59.1".
- Available in standard light and acoustic w/light.
- Illuminating from the inner surface.
- Pendant and surface mounted.
- 30+ acoustic felt colors available.

## SPECIFICATION

### Dimension


Cable and wire cord length: 59" (1.5m)

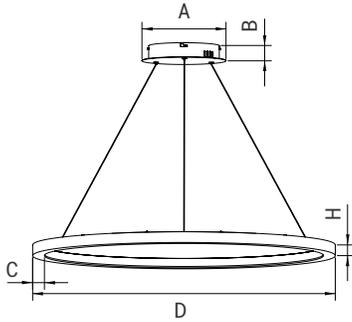

Dimension					
D	H	C	A	B	Wattage
23.6"(600mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	32W
35.4"(900mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	40W
47.2"(1200mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	70W
59.1"(1500mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	80W

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

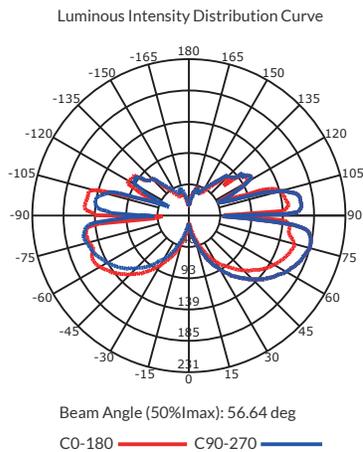

## ORDERING INFORMATION

EXAMPLE: VRI-LA-3624-40901-ACPMK-WH-NSAC-021 130

<input type="text" value="VR"/> <b>1. Series</b>	<input type="text"/> <b>2. Light Emitting</b>	<input type="text"/> <b>3. Acoustic Configuration</b>	<input type="text"/> <b>4. Wattage/ Diameter</b>	<input type="text"/> <b>5. CCT</b>	<input type="text"/> <b>6. CRI</b>	<input type="text"/> <b>7. Voltage</b>
<b>VR</b> Vicky Ring	<b>I</b> Inward Light	<b>BLANK</b> Light without Acoustic  <b>LA<sup>1</sup></b> Light with Acoustic <sup>1</sup>  <i>Specify color from the following list.</i>	<b>3624</b> 32W/Ø23.6"  <b>4035</b> 40W/Ø35.4"  <b>7047</b> 70W/Ø47.2"  <b>8059<sup>2</sup></b> 80W <sup>2</sup> /Ø59.1"	<b>30</b> 3000K  <b>35</b> 3500K  <b>40</b> 4000K  <b>50</b> 5000K	<b>90</b> 90Ra	<b>1</b> 120V-277V
		<input type="text"/> <b>8. Installation</b>	<input type="text"/> <b>9. Control</b>	<input type="text"/> <b>10. Frame Finish</b>	<input type="text"/> <b>11. Acoustic Finish</b>	
		<b>ACPMK</b> Aircraft Cable Pendant Mount Kits  <b>SMK</b> Surface Mount Kits	<b>BLANK</b> 0-10V Dimming	<b>WH<sup>3</sup></b> White <sup>3</sup>  <b>BK<sup>3</sup></b> Black <sup>3</sup>	<b>BLANK</b> No Acoustic  <b>Acoustic Color Code<sup>4</sup></b> <i>Specify from the following table<sup>4</sup></i>	

**NOTE:**

1. If choose Acoustic, please choose the acoustic color in the following list.
2. Acoustic is not available for 80W/Ø59.1”.
3. White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
4. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

### Acoustic Colors<sup>4</sup>



## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

### Lumen Output

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
32W	2240lm	0.30A	4000K	90	70
40W	2800lm	0.33A	4000K	90	70
70W	4900lm	0.58A	4000K	90	70
80W	5600lm	0.67A	4000K	90	70

### NOTE:

1. The lumen output is for the fixture without acoustic. The data for acoustic may vary based on different acoustic fiber colors. Please contact Customer Service if need the lumen output for acoustic version.
2. The lumen outputs for 70W and 80W are calculated.

## WARRANTY

5 year limited warranty.

Specifications subject to change without notice.