

VRO VICKY RING LIGHT

Outward, Acoustic Light Available



The Vicky Ring Light is a unique ring style light with an LED light source illuminating from its outer surface. It is available in sizes ranging from 23.6" (dia.) up to 59" (dia.). Aluminum body construction. Central canopy suspension is standard, with direct suspension and surface mounted as options.

TECHNICAL DATA

Wattage	32W, 40W, 70W, 80W
CCT	3000K, 3500K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load


FEATURES

- Fixtures in diameters from 23.6" through 59.1".
- Available in standard light and acoustic w/light.
- Illuminating from the outer surface.
- Pendant and surface mounted.

SPECIFICATION

Dimension


Cable and wire cord length: 59" (1.5m)

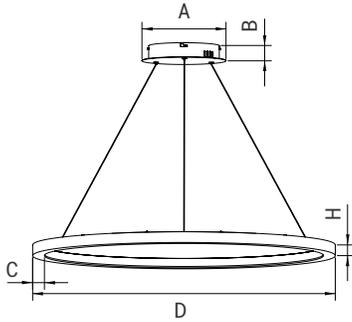

Dimension					
D	H	C	A	B	Wattage
23.6"(600mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	32W
35.4"(900mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	40W
47.2"(1200mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	70W
59.1"(1500mm)	1.3"(32mm)	1.4"(35mm)	10.0"(250mm)	1.38"(35mm)	80W

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

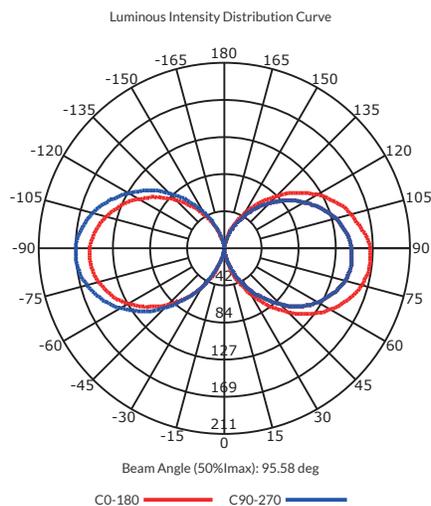

ORDERING INFORMATION

EXAMPLE: VRO-3624-40901-ACPMK-WH

<input type="text" value="VR"/> 1. Series	<input type="text"/> 2. Light Emitting	<input type="text"/> 3. Acoustic Configuration	<input type="text"/> 4. Wattage/ Diameter	<input type="text"/> 5. CCT	<input type="text"/> 6. CRI	<input type="text"/> 7. Voltage
VR Vicky Ring	O Outward Light	BLANK Light without Acoustic LA¹ Light with Acoustic ¹ <i>Specify color from the following list.</i>	3624 32W/Ø23.6" 4035 40W/Ø35.4" 7047 70W/Ø47.2" 8059² 80W ² /Ø59.1"	30 3000K 35 3500K 40 4000K 50 5000K	90 90Ra	1 120V-277V
		<input type="text"/> 8. Installation	<input type="text"/> 9. Control	<input type="text"/> 10. Frame Finish	<input type="text"/> 11. Acoustic Finish	
		ACPMK Aircraft Cable Pendant Mount Kits SMK Surface Mount Kits	BLANK 0-10V Dimming	WH³ White ³ BK³ Black ³	BLANK No Acoustic Acoustic Color Code⁴ <i>Specify from the following table⁴</i>	

NOTE:

1. If choose Acoustic, please choose the acoustic color in the following list.
2. Acoustic is not available for 80W/Ø59.1”.
3. White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
4. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

Acoustic Colors⁴



PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
32W	2240lm	0.30A	4000K	90	70
40W	2800lm	0.33A	4000K	90	70
70W	4900lm	0.58A	4000K	90	70
80W	5600lm	0.67A	4000K	90	70

NOTE:

1. The lumen output is for the fixture without acoustic. The data for acoustic may vary based on different acoustic fiber colors. Please contact Customer Service if need the lumen output for acoustic version.
2. The lumen outputs for 70W and 80W are calculated.

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.