

2" PORLA LED DOWNLIGHT 1500lm & 2000lm



The 2" Porla LED Downlight comes in round and square shapes with integral driver in a remote driver box. Five CCT selectable. Flexibility to switch color temperature during installation with the slide switch. Reflector optic design. Ideal for a variety of applications for both residential and commercial settings.

TECHNICAL DATA

Wattage	20W, 25W
Lumen Output	1500lm, 2000lm
CCT	Selectable 2700K/3000K/3500K/ 4000K/5000K
Driver	0-10V and Triac dimming
CRI	90
Cut Out	Ø2.64"
Beam Angle	50 degree
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for wet locations Non-IC Rated
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP54

FEATURES


- **Versatile Design Options:** 2" size available in round and square shapes with aluminum construction.
- **Advanced Performance Features:** Five CCT selectable with standard FT6 cable for reliable operation.

2" PORLA LED DOWNLIGHT 1500lm & 2000lm


SPECIFICATION

2" DL Triac & 0-10V Dimming


2" Round Trim

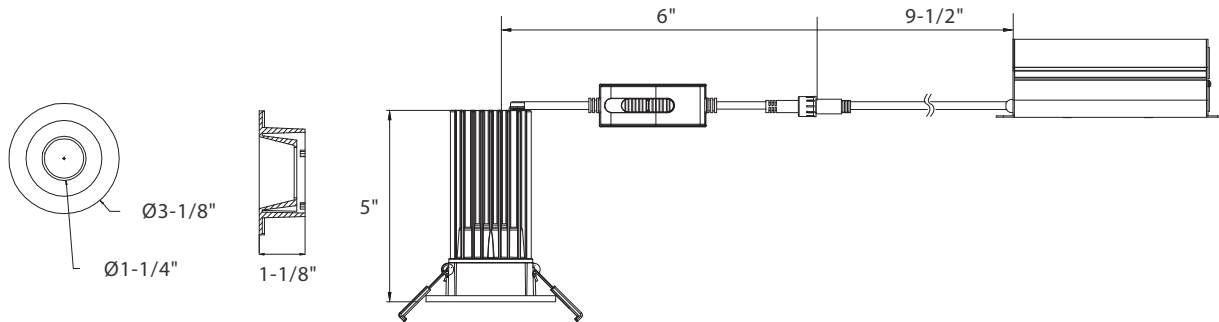

2" Square Trim

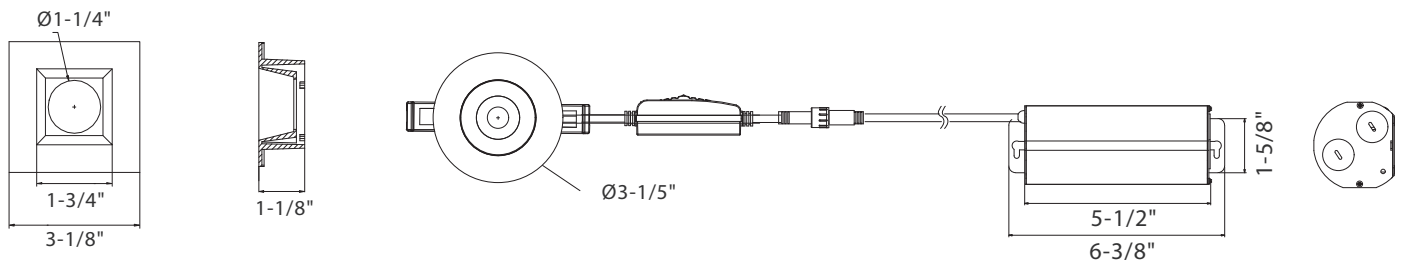

Rough In Plate New Version

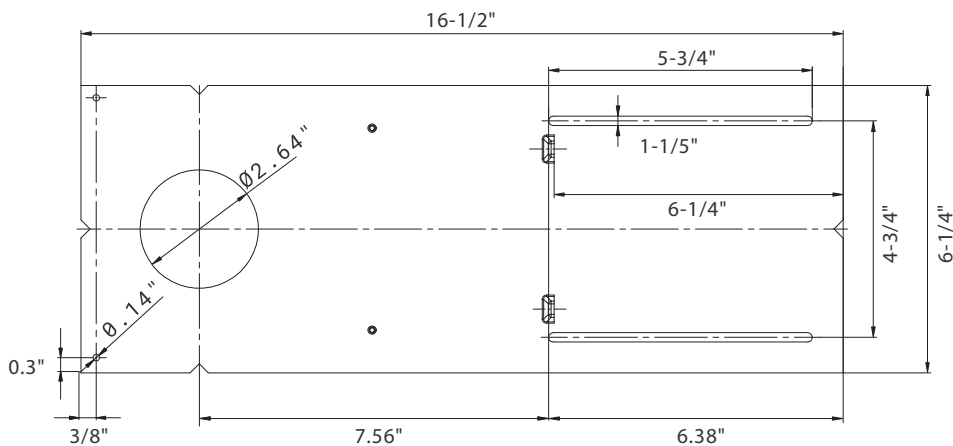

2" PORLA LED DOWNLIGHT 1500lm & 2000lm

ORDERING INFORMATION


EXAMPLE: POR02-DLR-20LM-90-MBK

POR						
Series	Size	Adjustable	Shape	Lumens/CRI	Trim Finish ¹	Driver Option
POR Porla	02 2"	DL Downlight	R Round S Square	15LM-90 1500lm/90CRI 20LM-90 2000lm/90CRI	MWH Matte White MBK Matte Black	POR02-20W-1-XD 0-10V/Triac Dimmable Driver for 1500lm POR02-25W-1-XD 0-10V/Triac Dimmable Driver for 2000lm

NOTE:

1. Custom trim colors are available at an additional charge.
2. 2700K, 3000K, 3500K, 4000K, 5000K selectable. 3000K is default setting.

ACCESSORIES (ORDERED AND SHIPPED SEPARATELY)

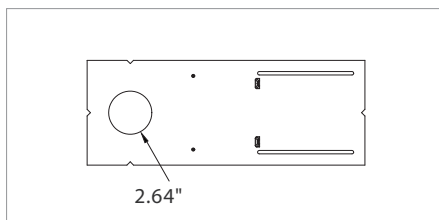

POR02-RIP-N
Rough-in Plate.
New Version



FT6 Extension Cable (2 pin).

POR-EXC6-FT6

6 feet 2 pin cable.

POR-EXC10-FT6

10 feet 2 pin cable.

POR-EXC20-FT6

20 feet 2 pin cable.

2" PORLA LED DOWNLIGHT 1500lm & 2000lm

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	CRI	Beaming Angle
20W	1640lm	2700K	90	50°
20W	1650lm	3000K	90	50°
20W	1740lm	3500K	90	50°
20W	1740lm	4000K	90	50°
20W	1700lm	5000K	90	50°
25W	2000lm	2700K	90	50°
25W	2000lm	3000K	90	50°
25W	2070lm	3500K	90	50°
25W	2100lm	4000K	90	50°
25W	1990lm	5000K	90	50°

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.