



The ADJ LED Post Top features in adjustable and indirect design. Light is reflected by the top reflector creating soft and uniform light with superior glare management. Die-cast Aluminum housing. Tempered clear glass. Reflector system made of aluminium sheet. White powder coating reflector for high reflection. Confidently suited for outdoor lighting applications such as landscape, courtyards, roadways.


## TECHNICAL DATA

<b>Wattage</b>	30W
<b>CRI</b>	80
<b>CCT</b>	3000K, 4000K, 5000K
<b>Input Voltage</b>	120-277VAC, 50/60Hz
<b>Operating Temp.</b>	-40°F to 104°F(-40°C to 40°C)
<b>Driver</b>	0-10V dimming
<b>Certifications</b>	cETL Listed RoHS compliant
<b>Power Factor</b>	>0.9 at full load
<b>Harmonic Distortion</b>	<20% at full load
<b>Projected Lifetime</b>	L70 - 100,000 Hours
<b>IP Rating</b>	IP65
<b>Surge Protection</b>	Integral 10KA

## FEATURES

- **Housing Construction:** Die-cast aluminum housing with tempered clear glass.
- **Reflector System:** Aluminum reflector with white powder coating for high reflectivity.

## SPECIFICATION

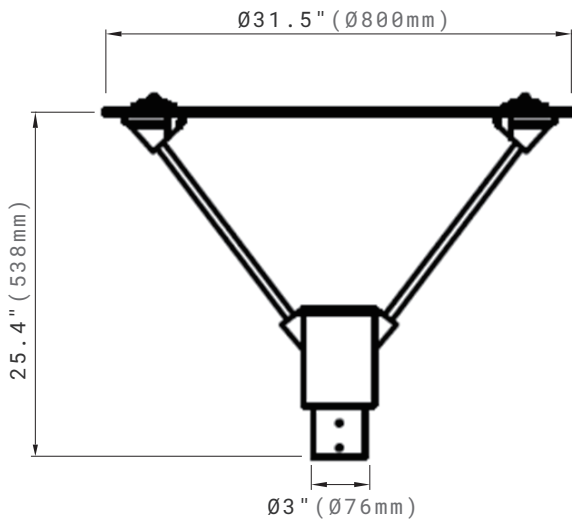

## ORDERING INFORMATION

EXAMPLE: APT30401-BK


APT							
Series	Wattage	CCT	Voltage	Control	Installation	Distribution	Finish
APT	30 30W	30 3000K 40 4000K 50 5000K	1 120-277V	BLANK 0-10V dimming	BLANK 3" Tenon Pole	BLANK Adjustable	BK Black <sup>1</sup> RAL#9005 BZ Bronze <sup>1</sup> RAL#8019

### NOTE:

- Standard Finish is Black and Bronze. Custom colors may be available for an additional fee. Please contact Customer Service for more information.

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

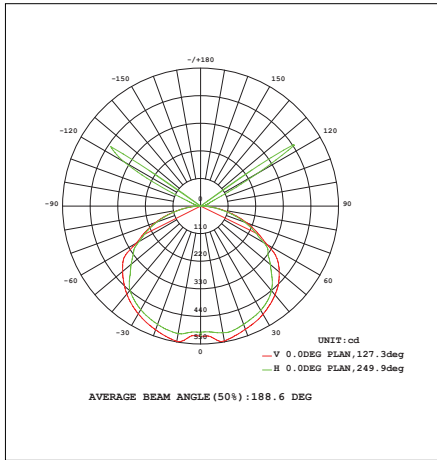

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	CRI	LPW
30W	2300lm	4000K	80	77

## WARRANTY

5 years limited warranty.

Specifications subject to change without notice.