

# STRAIGHT MAGNETIC TRACK LIGHT

## Cylinder Pendant



Elegant body coating and antiglare cover. Thanks to the length adjustable cable, the magnetic pendant works smooth in different spaces. Comfortable lighting without glare. Minimal glare and multiple light beams.

### TECHNICAL DATA

<b>Wattage</b>	5W, 10W
<b>Input Voltage</b>	24VDC
<b>Beam Angle</b>	
5W	20°, 30°, 40°
10W	18°, 24°, 36°
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	90Ra
<b>Driver</b>	Triac, 0/1-10V
<b>Certifications</b>	cETL Listed RoHS compliant
<b>Installation</b>	Magnetic
<b>Environment</b>	Indoor



5W



10W

# STRAIGHT MAGNETIC TRACK LIGHT

## Cylinder Pendant

### ORDERING INFORMATION

EXAMPLE: CYLP05-3090-24V-30-MTM-BK

CYLP						
Series	Wattage	CCT&CRI	Voltage	Beam Angle	Installation	Finish
CYLP	05 5W	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24 <sup>1</sup> 24VDC <sup>1</sup>	20 20 degree 30 30 degree 40 40 degree	MTM Magnetic Track Mount	BK <sup>2</sup> Black <sup>2</sup> WH <sup>2</sup> White <sup>2</sup>
	10 10W	2790 2700K/90Ra 3090 3000K/90Ra 3590 3500K/90Ra 4090 4000K/90Ra	24 <sup>1</sup> 24VDC <sup>1</sup>	18 18 degree 24 24 degree 36 36 degree		

**NOTE:**


1. The fixture is used for 24V magnetic track system.
2. Black and white finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

# STRAIGHT MAGNETIC TRACK LIGHT


## Cylinder Pendant

### DIMENSION

#### Small 5W

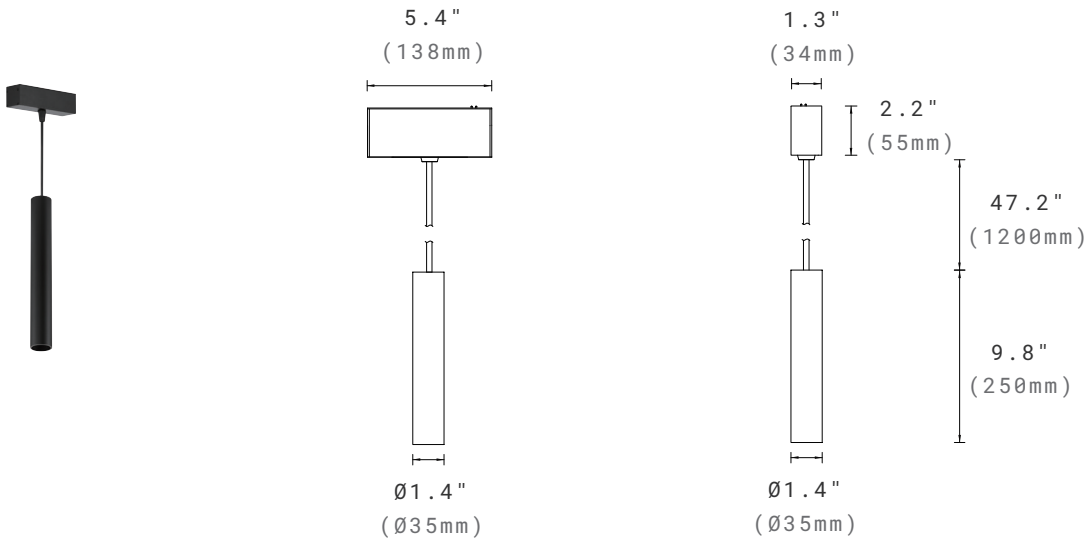

#### Large 10W

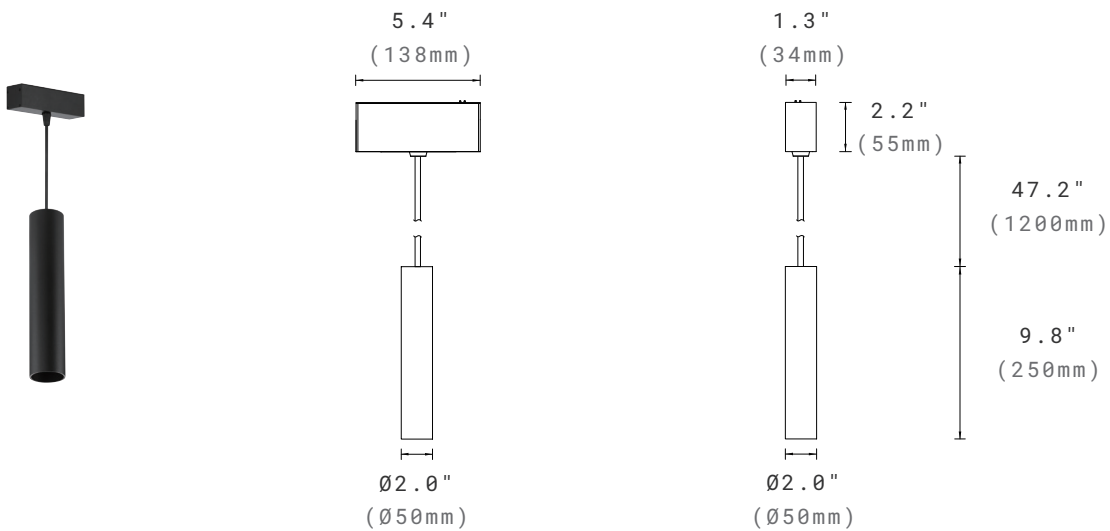

### PERFORMANCE DATA


Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Beam Angle	Lumen Output	CRI	CCT	LPW
5W	20°/30°/40°	440lm	90	3000K	88
10W	18°/24°/36°	780lm	90	3000K	78


### PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


#### Small 5W



h(m)	E(lx)	Φ(m)
2	563	Φ0.69
3	250	Φ1.03
3.5	183	Φ1.20
4	140	Φ1.38
5	90	Φ1.55




h(m)	E(lx)	Φ(m)
1	2519	Φ0.32
2	629	Φ0.65
3	279	Φ0.98
4	157	Φ1.31
5	100	Φ1.64




h(m)	E(lx)	Φ(m)
2	278	Φ0.96
3	124	Φ1.44
3.5	91	Φ1.68
4	69	Φ1.92
5	44	Φ2.40


#### Large 10W



h(m)	E(lx)	Φ(m)
1	3011	Φ0.32
2	752	Φ0.64
3	334	Φ0.97
4	188	Φ1.29
5	120	Φ1.62



h(m)	E(lx)	Φ(m)
1	3857	Φ0.40
2	964	Φ0.81
3	428	Φ1.22
4	241	Φ1.62
5	154	Φ2.03



h(m)	E(lx)	Φ(m)
1	2154	Φ0.64
2	538	Φ1.28
3	239	Φ1.92
4	134	Φ2.56
5	86	Φ3.21

### WARRANTY

5 year limited warranty.

Specifications subject to change without notice.