



FEATURES

- Only 4W for short set-back burial installations.
- Heavy duty cast aluminum housing.
- Clear Tempered Glass + SS316 bezel.
- Various beam angles.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Delivered Lumen	Beam Angles	CCT	CRI
4W	217lm	10°	3000K	80
4W	208lm	25°	3000K	80
4W	192lm	45°	3000K	80
4W	178lm	60°	3000K	80
4W	161lm	H30°xV15°	3000K	80




Kaleido Mini round in-ground light features full ranges of LED source, photometric and options, ideally suited for short set-back burial installations in concrete and lawns to highlight architectural features on walls and to light up trees and bushes.


TECHNICAL DATA

Wattage	4W
CRI	80
Driver	ON/OFF
Input Voltage	120-277V
Operating Temp.	-20°C~45°C (-4°F ~113°F)
Projected Lifetime	50,000 hrs at 25°C
Certifications	cETL
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP67
IK Rating	IK10

CCT and Colors

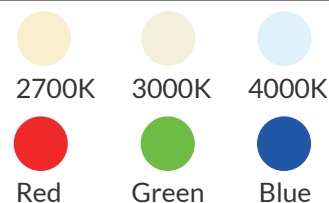

Optics

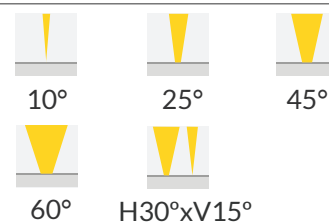

ORDERING INFORMATION

EXAMPLE: KADM-4-30801-25-316


KADM						
Series	Wattage	CCT /CRI	Voltage	Beam Angles	Bezel	Options
KADM Kaleido Mini	4 4W	2780 2700K CRI80 3080 3000K CRI80 4080 4000K CRI80 R Red G Green B Blue	1 120-277V Internal Driver	10 10° 25 25° 45 45° 60 60° 30x15 H30°xV15°	316 Stainless Steel 316 ¹	BLANK ON/OFF M Marine ambient corrosion resistance SRL Slip-resistant lens HCL Honeycomb lens

NOTE:


1. Stainless Steel 316 is the standard bezel. Custom bezels are available at an additional charge.

PHOTOMETRY


All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

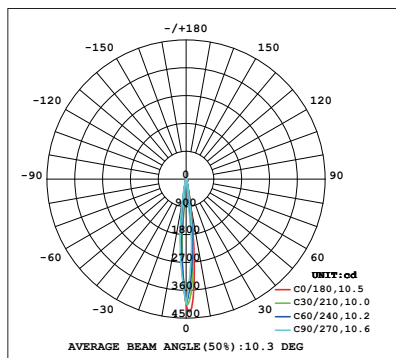


10°

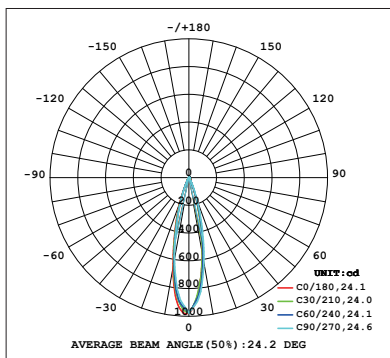


25°

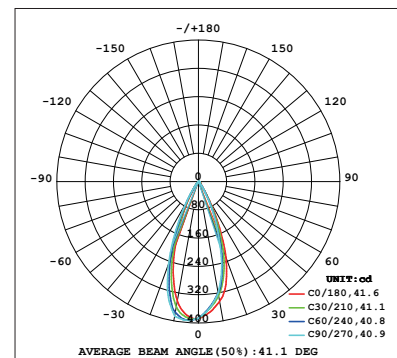

45°

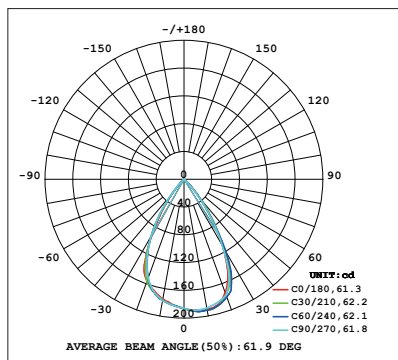


60°

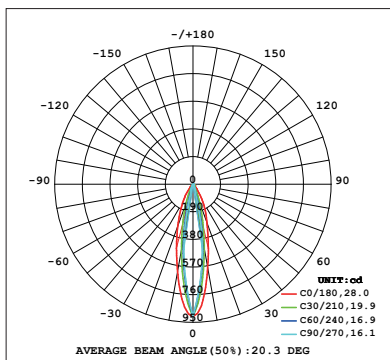

H30°xV15°

DIMENSION

2.82lbs (1.28kgs)
with 39.4" (1M) long power cable

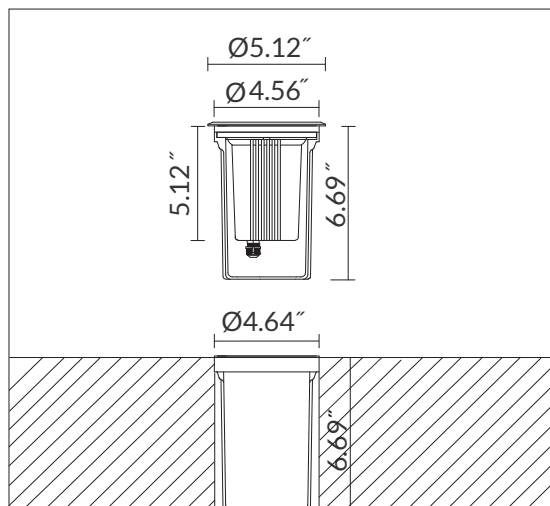

WARRANTY

2 years limited warranty.
Specifications subject to change without notice.