




Kaleido tilt in-ground light has heavy duty cast aluminum housing, clear tempered glass and stainless steel 316 bezel. Multiple beam angle options including asymmetric spread, and adjustable aiming by manual tilting up to +/-15°, ideally suitable for burial installations in concrete and lawns for grazing walls and columns, highlighting art objects such as sculptures and lighting up trees and bushes.


TECHNICAL DATA

Wattage	6.5W/10W/14W
CRI	80
Driver	ON/OFF or 0-10V dimming
Input Voltage	120-277V
Operating Temp.	-40°C~45°C (-40°F ~113°F)
Projected Lifetime	50,000 hrs at 25°C
Certifications	cETL
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP67
IK Rating	IK10

CCT and Colors



Optics

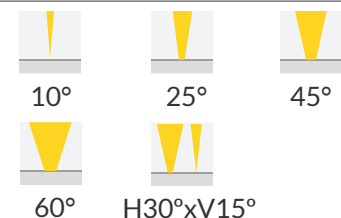

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.


Watts	Delivered Lumen	Beam Angles	CCT	CRI
6.5W	624lm	10°	3000K	80
6.5W	618lm	25°	3000K	80
6.5W	607lm	40°	3000K	80
6.5W	588lm	60°	3000K	80
6.5W	430lm	H35°xV15°	3000K	80
10W	910lm	10°	3000K	80
10W	965lm	25°	3000K	80
10W	907lm	40°	3000K	80
10W	880lm	60°	3000K	80
10W	630lm	H35°xV15°	3000K	80
14W	1356lm	10°	3000K	80
14W	1300lm	25°	3000K	80
14W	1339lm	40°	3000K	80
14W	1297lm	60°	3000K	80
14W	955lm	H35°xV15°	3000K	80

FEATURES

- Manual tilting up to +/-15°
- Heavy duty cast aluminum housing.
- Clear Tempered Glass + SS316 bezel.
- Various beam angles.


DIMENSION

6.17lbs (2.8kgs)
with 39.4" (1M) long power cable

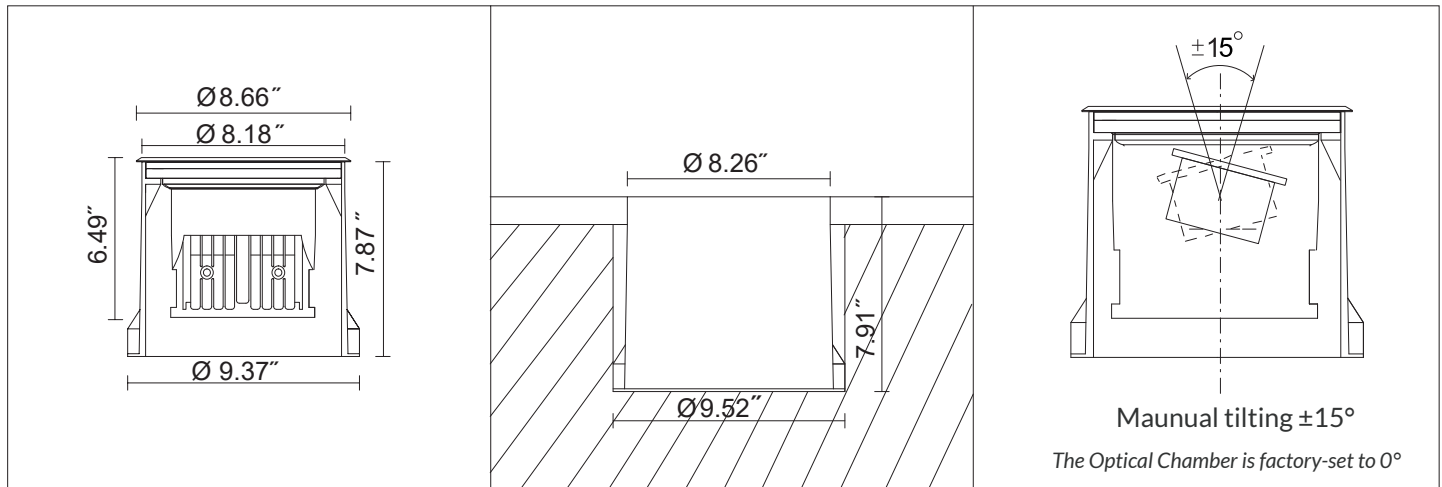

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

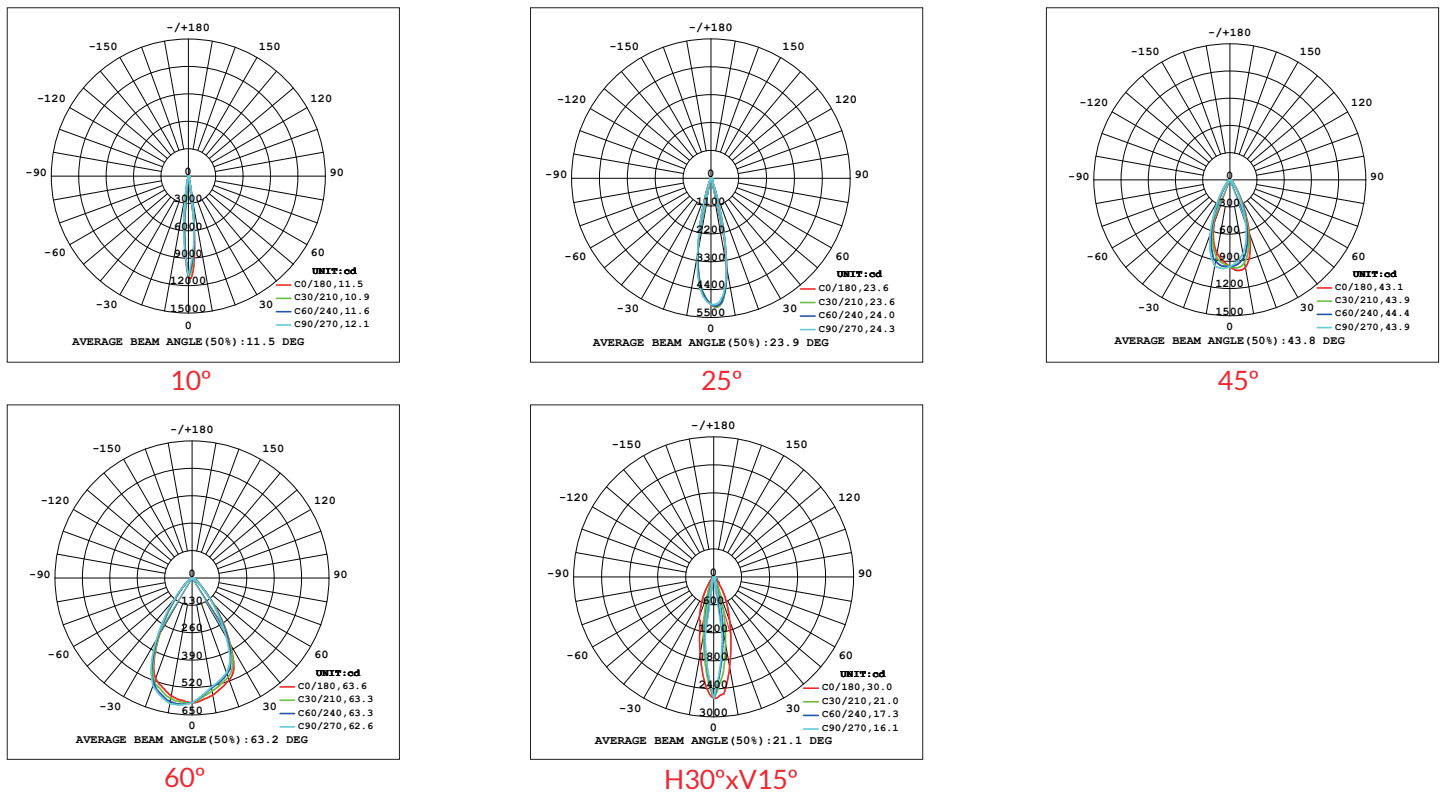

ORDERING INFORMATION

EXAMPLE: KADT-10-30801-316


Ref#: 20260420

KADT						
Series	Wattage	CCT /CRI	Voltage	Beam Angles	Bezel	Options
KADT Kaleido Manual tilting ±15° <i>*The Optical Chamber is factory-set to 0°. Open the chamber with a T30 tamper-resistant wrench or a screwdriver for manual tilting.</i>	6.5 6.5W 10 10W 14 14W	2780 2700K CRI80 3080 3000K CRI80 4080 4000K CRI80 R Red G Green B Blue	1 120-277V Internal Driver	10 10° 25 25° 45 45° 60 60° 30x15 H30°xV15°	316 Stainless Steel 316	BLANK ON/OFF M Marine ambient corrosion resistance D 0-10V Dimming for 10W and 14W only SRL Slip-resistant lens HCL Honeycomb lens

NOTE:

1. Stainless Steel 316 is the standard bezel. Custom bezels are available at an additional charge.

ACCESSORIES (ORDER SEPARATELY)

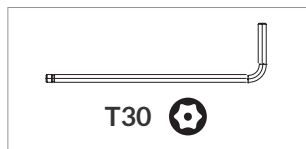

TRW-T30

Tamper-resistant wrench, T30
used for manual tilting.

WARRANTY

2 years limited warranty.
Specifications subject to change without notice.