

KALEIDO INGROUND LIGHT Wall Wash



FEATURES

- Asymmetric reflector designed for wall wash applications and for minimizing light trespass.
- Heavy duty cast aluminum housing.
- Clear Tempered Glass + SS316 bezel.



Kaleido Wall Wash round in-ground light features in asymmetric reflector system. Designed for wall wash applications and for minimizing light trespass. It has heavy duty cast aluminum housing, clear tempered glass and stainless steel 316 bezel.

TECHNICAL DATA

Wattage	15W
CRI	80
Driver	ON/OFF or 0-10V dimming
Input Voltage	120-277V
Operating Temp.	-20°C~45°C (-4°F ~113°F)
Projected Lifetime	50,000 hrs at 25°C
Certifications	cETL
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP67
IK Rating	IK10
CCT and Colors	2700K 3000K 4000K 5000K
Optics	 Wall Wash

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Delivered Lumen	Optic	CCT	CRI
15W	822lm	Wall Wash	3000K	80

ORDERING INFORMATION

EXAMPLE: KADW-15-30801-W-316


KADW						
Series	Wattage	CCT /CRI	Voltage	Optics	Bezel	Options
KADW Kaleido Wall Wash	15 15W	2780 2700K CRI80 3080 3000K CRI80 4080 4000K CRI80 5080 5000K CRI80	1 120-277V Internal Driver	W Wall wash	316 Stainless Steel 316 ¹	BLANK ON/OFF M Marine ambient corrosion resistance D 0-10V Dimming

NOTE:

1. Stainless Steel 316 is the standard bezel. Custom bezels are available at an additional charge.


DIMENSION

6.17lbs (2.8kgs)
with 39.4" (1M) long power cable

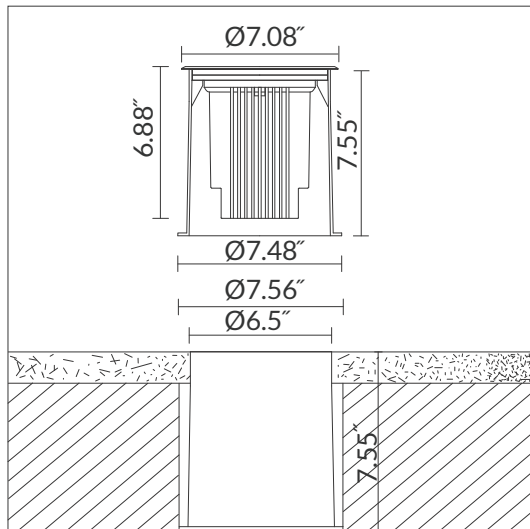

PHOTOMETRY

All published luminaire photo metric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

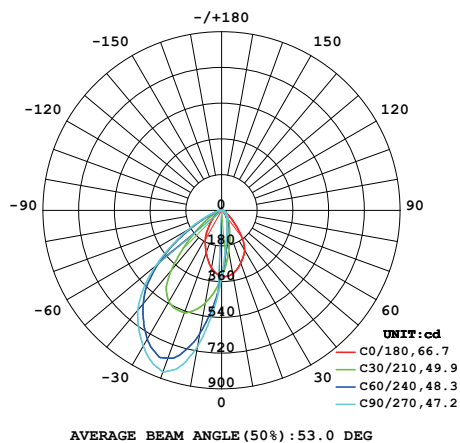

WARRANTY

2 years limited warranty.
Specifications subject to change without notice.