



Magnetic Track Profile



Magnetic Track Profile
Recessed with Flange



The Lin Series is a linear lighting solution designed to work with our Magnetic Track System. It features a low glare diffused lens and is available in several different wattage/length combinations all housed in an elegant body.

TECHNICAL DATA

Wattage	4W, 7W, 13W, 26W, 39W
Input Voltage	24VDC
CCT	2700K, 3000K, 3500K, 4000K
CRI	90Ra
Lens	Diffused
Driver	Triac, 0/1-10V
Certifications	cETL Listed RoHS compliant
Installation	Magnetic
Environment	Indoor

NOTE:

Straight Magnetic Track Profile sold separately.

ORDERING INFORMATION

EXAMPLE: LIN04-3090-24V-DL-MTM-BK




LIN						
Series	Wattage/Length	CCT&CRI	Voltage	Lens	Installation	Finish
LIN	04 4W/3.3"	2790 2700K/90Ra	24V¹ 24VDC ¹	DL Diffused Lens	MTM Magnetic Track Mount	BK² Black ²
	07 7W/6.46"	3090 3000K/90Ra				WH² White ²
	13 13W/12.76"	3590 3500K/90Ra				
	26 26W/25.2"	4090 4000K/90Ra				
	39 39W/37.8"					

NOTE:




1. The fixture is used for 24V magnetic track system.
2. Black and white finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

DIMENSION

4W





7W

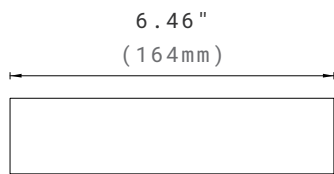



STRAIGHT MAGNETIC TRACK LIGHT

Lin Series



13W

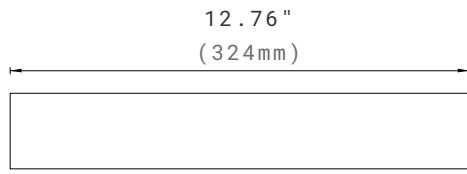

26W

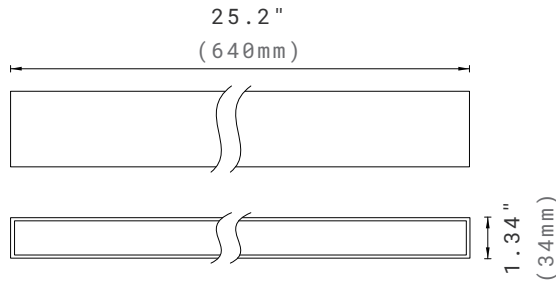


39W

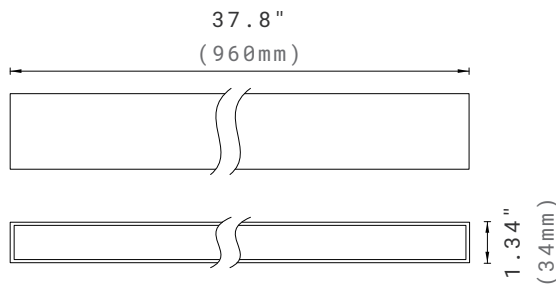

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

Diffuse

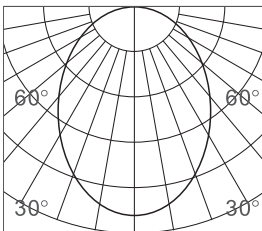

h(m)	E(lx)	Φ(m)
1	105.5	Φ2.60
2	26.3	Φ5.20
3	11.7	Φ7.80
4	6.5	Φ10.40
5	4.2	Φ13.00

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	CRI	Lens	CCT	LPW
4W	220lm	90	Diffused	3000K	55
7W	490lm	90	Diffused	3000K	70
13W	900lm	90	Diffused	3000K	69
26W	1720lm	90	Diffused	3000K	66
39W	2550lm	90	Diffused	3000K	65

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.