



Aluminum Reflector



Polycarbonate Reflector

Features

- **Dual-adjustable Settings:** Switchable wattage and CCT for flexible applications.
- **Robust Construction:** Optimized aluminum alloy housing design for superior thermal management.
- **Intallations:** Hook mount, Swivel rod pendant mount with 3/4" pipe, Surface Mount
- **Add-ons:** Available with prismatic clear polycarbonate reflector and clear aluminum reflectors.



The Snug LED low bay offers excellent ambient lighting with diffused polycarbonate prismatic reflector that delivers horizontal and vertical uniformity, flicker control and visual comfort. It is designed to be a perfect high-end replacement for traditional HID fixtures up to 400W in warehousing, gymnasiums, or retail applications.

TECHNICAL DATA

Wattage	Selectable 80W/65W/50W
CCT	Selectable 3000K/4000K/5000K
CRI	80
Dimming	0-10V dimming (0% - 100%)
Input Voltage	120-277V
Projected Lifetime	L70-54,000 hours
Operating Temp.	-40°C to 40°C (-4°F to 104°F)
Certifications	UL Listed
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load



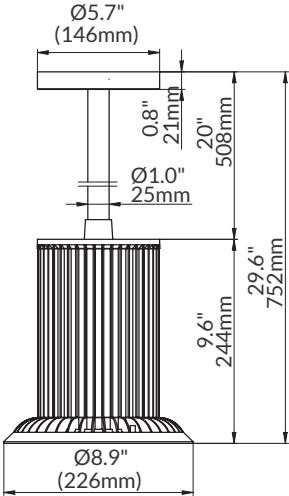
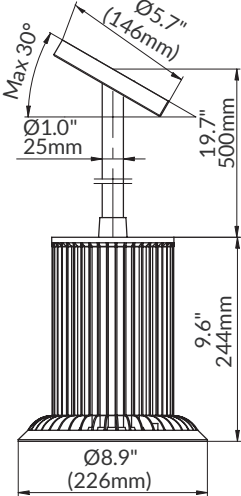
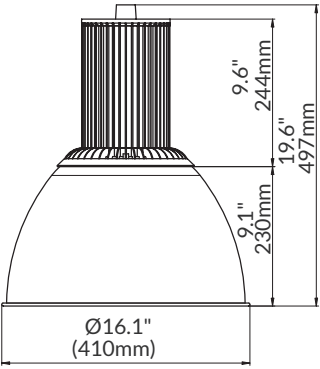
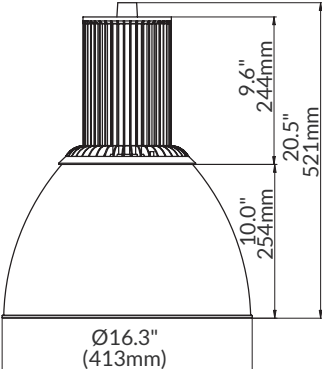
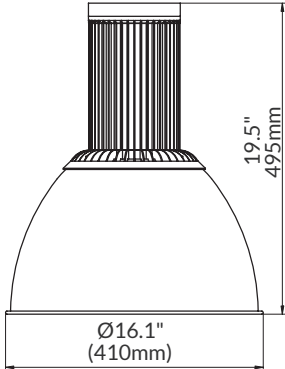
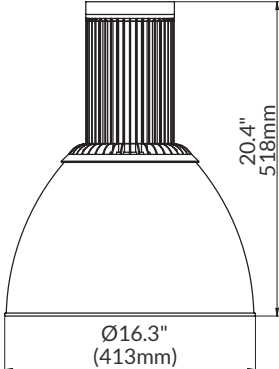
PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Part Number	Nominal Wattage	Lumen Output	CCT	CRI	Reflector
80SP	50W	6800lm	3000K	80	Polycarbonate 70°
80SP	65W	8700lm	3000K	80	Polycarbonate 70°
80SP	80W	10480lm	3000K	80	Polycarbonate 70°
80SP	50W	7040lm	3000K	80	Aluminum 65°
80SP	65W	8990lm	3000K	80	Aluminum 65°
80SP	80W	10830lm	3000K	80	Aluminum 65°
80SP	50W	7750lm	3000K	80	None
80SP	65W	9890lm	3000K	80	None
80SP	80W	11920lm	3000K	80	None

DIMENSION

With SJTW 18AWG 1.2m/4ft cable.

 3/4" Threaded Rod Adapter	 Surface mount	 Rod Pendant 20" Long	 Swivel Rod Pendant 20" Long
 3/4" Threaded Rod Adapter Aluminum Reflector	 3/4" Threaded Rod Adapter Polycarbonate Reflector	 Surface Mount Aluminum Reflector	 Surface Mount Polycarbonate Reflector

ORDERING INFORMATION

EXAMPLE: SLB-80SP-SW1-UM-BK

SLB						
Series	Wattage	CCT	Voltage	Control	Installation	Finish Color
SLB	80SP Selectable ¹ 50W 65W 80W	SW Selectable ² 3000K 4000K 5000K	1 120-277V	Blank 0-10V dimming driver	Blank 3/4" Threaded Rod Adapter ³ UM 1/2" Threaded Hook SM Surface Mount	BK Black ⁴ RAL9017 SL Silver ⁴ RAL9006

NOTE:

1. 80W is default setting.
2. 4000K is default setting.
3. Please choose the desired rod pendant mount kits in the following accessories list.
4. Black and silver are standard. Custom color is available at an additional charge.

ACCESSORIES (ORDERED AND SHIPPED SEPARATELY)



SLB20-RPMK-BK

3/4" Threaded Rod
pendant mount kits, 20"
long, black.



SLB20-SRPMK-BK

3/4" Threaded Swivel Rod
pendant mount kits, 20"
long, black.



SLB-PC16-70D

Ø 16.3" (413.0mm)
polycarbonate reflector, 70°

SLB20-RPMK-SL

3/4" Threaded Rod
pendant mount kits, 20"
long, silver.

SLB20-SRPMK-SL

3/4" Threaded Swivel Rod
pendant mount kits, 20"
long, silver.



SLB-AL16-65D

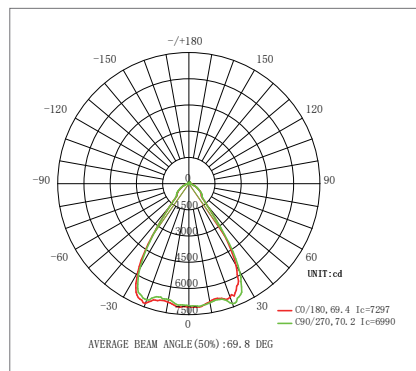
Ø 16.1" (410.0mm)
aluminum reflector, 65°

Note: The threaded Pendant Rods can't be cut in the field or adjustable.
Please contact Customer Service for special length.


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


Ref#: 20260417



Polycarbonate Reflector, 70°

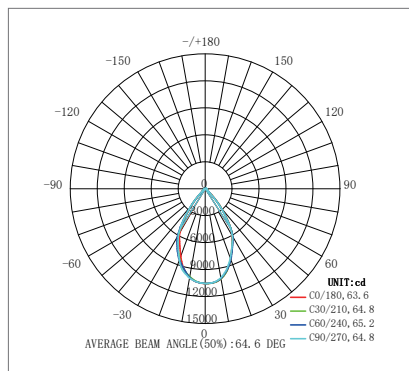

Aluminum Reflector, 65°

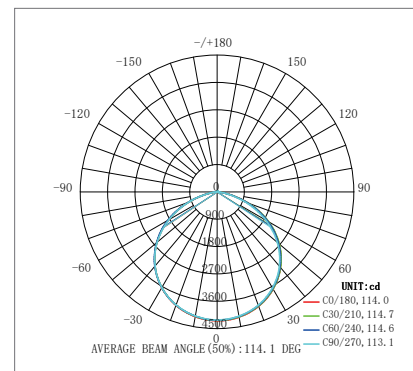

Without Reflector, 110°

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.