


4" CORLA DOWNLIGHT

Multiples Series

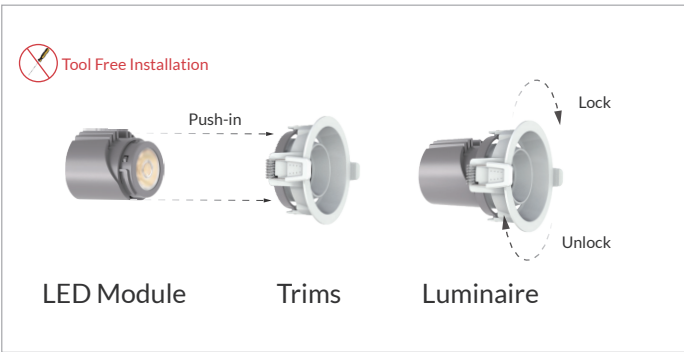

The Corla Downlight System revolutionizes interior lighting through modular adaptability. Featuring precision-engineered optics and adjustable configurations, the system delivers exceptional light quality with superior optical control.

TECHNICAL DATA


Wattage	20W, 25W (single module)
CRI	90, SDCM<3
CCT	2700K, 3000K, 3500K, 4000K Dim to Warm: 2000K-3000K
Dimming	Triac dimming (1%-100%) 0-10V dimming (3%-100%)
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L80-50,000 hours
Working Temperature	-4°F to 104°F (-20°C to 40°C)
Certifications	ETL Listed to US and Canadian standards Suitable for damp locations RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES


- **Super Modular Design:** tool-free interchangeable components.
- **Precise Light Control:** 4 beam angles (15°/24°/38°/55°), anti-glare accessories, and a 38° cutoff angle. 355° rotation & 30° tiltable.
- **Versatile Project Adaptability:** supports general lighting, spot/flood and accent lighting.
- **Optimized Thermal Performance:** guarantees long-term durability and consistent luminous performance.

SPECIFICATION


LED Module

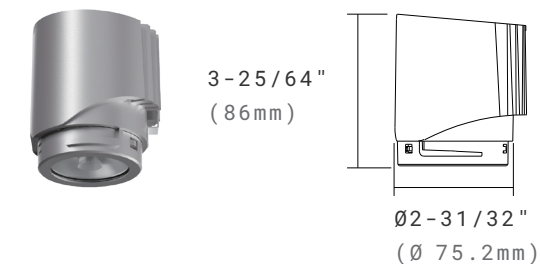

Trims

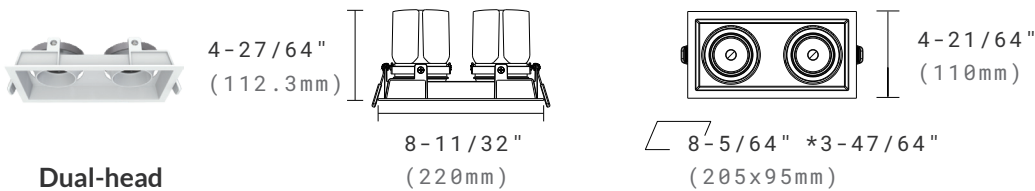

Remodel Mounted Driver

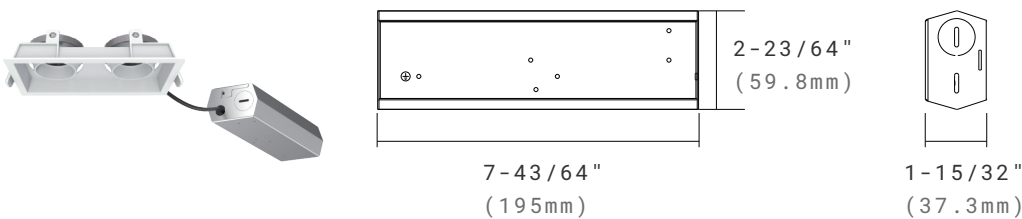

ORDERING INFORMATION

EXAMPLE

COR	04	20	35	90	1	XD	38
1	2	3	4	5	6	7	8

1. Series

- ☒ **COR**- Corla LED Module

2. Size

- ☐ **04** - 4 inch Module

3. Wattage (single module)

- ☐ **20** - 20W ☐ **25** - 25W

4. CCT

- ☐ **27** - 2700K ☐ **30** - 3000K
☐ **35** - 3500K ☐ **40** - 4000K
☐ **DTW** - 2000K-3000K dim to warm

5. CRI

- ☐ **90** - 90Ra

6. Voltage

- ☐ **1** - 120-277V

7. Dimming

- ☐ **XD** - 0-10V/Triac Dimming

NOTE:

1. Triac dimming only works on 120VAC.

8. Beaming Angle

- ☐ **15** - 15° ☐ **24** - 24°
☐ **38** - 38° ☐ **55** - 55°

Trim Options

- ☐ **CORC04-2H-S-ADJ-WH**

Commercial series, dual-head trim, square, adjustable, white trim



NOTE:

1. White trim is standard finish. Custom colors are available at an additional fee.

Optical Accessory Options

- ☐ **COR04-HCB**

Honeycomb Filter



- ☐ **COR04-BSL**

Beam Soft Lens



Emergency Battery Back-up Option

- ☐ **AAL-EBU-AC08D-YYY**

Remote 8W LED Emergency
Battery Back-up 120-347VAC

- ☐ **AAL-EBU-AC15D-YYY**

Remote 15W LED Emergency
Battery Back-up 120-347VAC

- ☐ **AAL-EBU-AC25D-YYY**

Remote 25W LED Emergency
Battery Back-up 120-347VAC




NOTE:

1. A single EBU can power multiple light fixtures. The 8W EBU supports up to 60W total lighting load, 15W EBU supports up to 100W total lighting load, while the 25W EBU supports up to 150W total lighting load.
2. The dimming control wire is optional when the combined power of all connected lights is lower than the EBU's rated power.
3. The dimming control wire must be connected when the total power of all connected lights exceeds the EBU's rated capacity.


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

20W

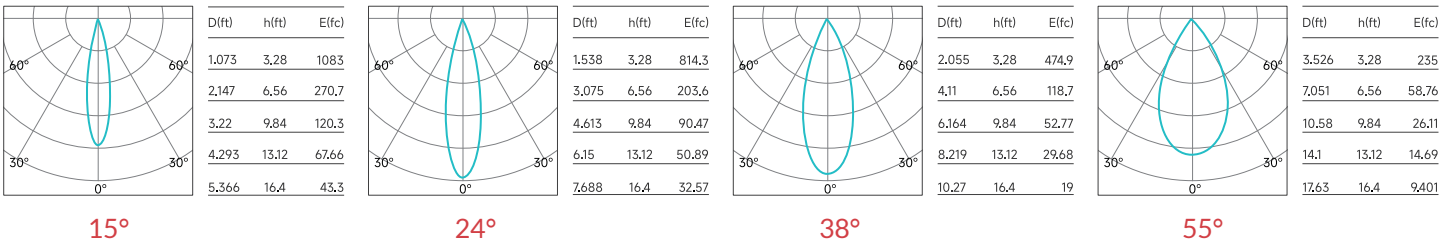

25W

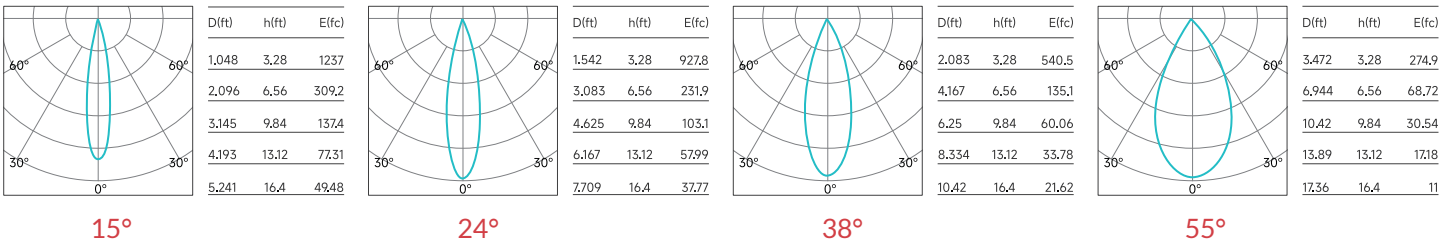

Above test data is based on **Round** trim with 3000K 90CRI LED.

PERFORMANCE DATA

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)
20W	3000K	90	15°	1874	94	11763
			24°	1929	97	8774
			38°	1930	97	5126
			55°	1946	97	2523
25W	3000K	90	15°	2123	89	13368
			24°	2214	93	9998
			38°	2220	93	5818
			55°	2245	93	2956

Above test data is based on **Round** trim with 3000K 90CRI LED.

LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	0.95
3000K	1.00
3500K	1.04
4000K	1.06