



5" CORLA DOWNLIGHT

Residential Series

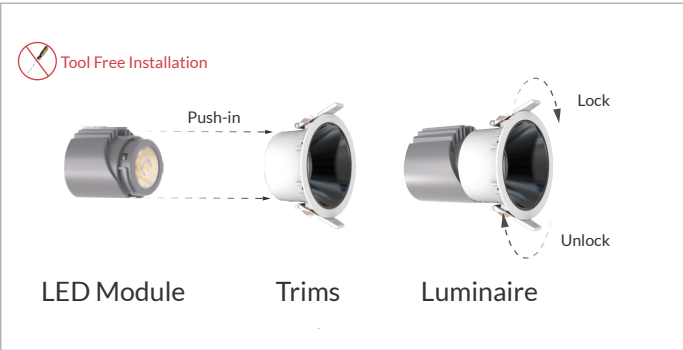

LED Module

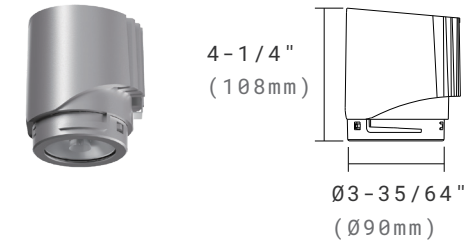

The Corla Downlight System revolutionizes interior lighting through modular adaptability. Featuring precision-engineered optics and adjustable configurations, the system delivers exceptional light quality with superior optical control.

TECHNICAL DATA

Wattage	30W, 35W (single module)
CRI	90, SDCM<3
CCT	2700K, 3000K, 3500K, 4000K Dim to Warm: 2000K-3000K
Dimming	Triac dimming (1%-100%) 0-10V dimming (3%-100%)
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L80-50,000 hours
Working Temperature	-4°F to 104°F (-20°C to 40°C)
Certifications	ETL Listed to US and Canadian standards Suitable for damp locations RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES

- **Super Modular Design:** 4 mounting trims and tool-free interchangeable components.
- **Precise Light Control:** 4 beam angles (15°/24°/38°/55°), anti-glare accessories, and a 38° cutoff angle. 355° rotation & 30° tiltable.
- **Versatile Project Adaptability:** supports general lighting, spot/flood and accent lighting.
- **Optimized Thermal Performance:** guarantees long-term durability and consistent luminous performance.



SPECIFICATION

Trims





**Shallow Frame Reflector
Adjustable**

5-29/64"
(138.5mm)





**Deep Frame Reflector
Adjustable**

6-31/64"
(164.5mm)





**Deep Frame Reflector
Fixed**

6-15/64"
(158.5mm)





**Deep Frame
Fixed**

7-1/32"
(178.5mm)



Remodel Mounted Driver

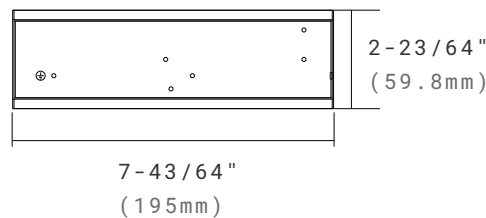

ORDERING INFORMATION

EXAMPLE	COR	05	30	35	90	1	XD	38
	1	2	3	4	5	6	7	8

1. Series

- ☒ **COR**- Corla LED Module

2. Size

- ☐ **05** - 5 inch Module

3. Wattage (single module)

- ☐ **30** - 30W ☐ **35** - 35W

4. CCT

- ☐ **27** - 2700K ☐ **30** - 3000K
☐ **35** - 3500K ☐ **40** - 4000K
☐ **DTW** - 2000K-3000K dim to warm

5. CRI

- ☐ **90** - 90Ra

6. Voltage

- ☐ **1** - 120-277V

7. Dimming

- ☐ **XD** - 0-10V/Triac Dimming

NOTE:

1. Triac dimming only works on 120VAC.

8. Beaming Angle

- ☐ **15** - 15° ☐ **24** - 24°
☐ **38** - 38° ☐ **55** - 55°

Optical Accessory Options

- ☐ **COR05-HCB** 
 Honeycomb Filter
☐ **COR05-BSL** 
 Beam Soft Lens

Mounting Accessory Options

- ☐ **RIP-55135**
☐ **RIP-70145**
 New construction pre-mounting plate for Corla Downlight.

NOTE:

1. Please refer to the Selection Guide to select proper plate.

Trim Options

- ☐ **CORR05-R-ADJ-SFR-WH** 
 Residential series, round trim, adjustable, shallow frame reflector, white trim
☐ **CORR05-R-ADJ-DFR-WH** 
 Residential series, round trim, adjustable, deep frame reflector, white trim
☐ **CORR05-R-DL-DFR-WH** 
 Residential series, round trim, fixed, deep frame reflector, white trim
☐ **CORR05-R-DL-DF-WH** 
 Residential series, round trim, fixed, deep frame, white trim

NOTE:

1. White trim is standard finish. Custom colors are available at an additional fee.

Emergency Battery Back-up Options

- ☐ **AAL-EBU-AC08D-YYY**
 Remote 8W LED Emergency Battery Back-up 120-347VAC
☐ **AAL-EBU-AC15D-YYY**
 Remote 15W LED Emergency Battery Back-up 120-347VAC
☐ **AAL-EBU-AC25D-YYY**
 Remote 25W LED Emergency Battery Back-up 120-347VAC



NOTE:

1. A single EBU can power multiple light fixtures. The 8W EBU supports up to 60W total lighting load, 15W EBU supports up to 100W total lighting load, while the 25W EBU supports up to 150W total lighting load.
2. The dimming control wire is optional when the combined power of all connected lights is lower than the EBU's rated power.
3. The dimming control wire must be connected when the total power of all connected lights exceeds the EBU's rated capacity.

ROUGH-IN PLATE SELECTION GUIDE

To ensure a proper fit, select the correct rough-in plate by matching it to your fixture's cutout size.

Follow the 2 steps below:


Step 1. Identify the Cutout Size: Locate the Corla Downlight model in the table below and note its required cutout dimension.

Step 2. Match the Plate: Using the diagram that follows, find the rough-in plate part# that corresponds to the cutout size you identified in Step 1.

Corla Downlight Cutout Dimension Table

Model	Hotel	Residential	Commercial	Deep Anti-Glare	Wall Washer
COR02	Ø2.17"(55mm)	Ø2.17"(55mm)	Ø2.56"(65mm)	/	/
COR03	Ø2.95"(75mm)	Ø2.95"(75mm), Ø2.68"(68mm)	Ø3.15"(80mm)	Ø2.95"(75mm)	Ø2.95"(75mm)
COR04	Ø3.94"(100mm)	Ø4.53"(115mm), Ø3.94"(100mm)	Ø3.74"(95mm)	Ø3.94"(100mm)	/
COR05	Ø4.92"(125mm), Ø4.8"(122mm)	Ø4.33"(110mm), Ø4.92"(125mm) Ø5.12"(130mm), Ø5.31"(135mm)	Ø4.53"(115mm)	Ø4.92"(125mm)	/

Rough-in Plate

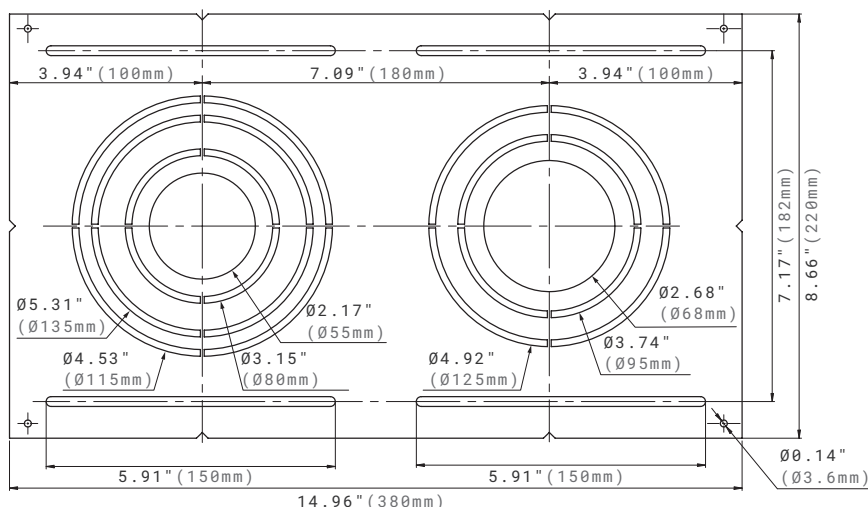


Part#

RIP-55135

New construction pre-mounting plate for Corla Downlight.

Compatible cutouts:

Ø2.17"(Ø55mm)
 Ø2.68"(Ø68mm)
 Ø3.15"(Ø80mm)
 Ø3.74"(Ø95mm)
 Ø4.53"(Ø115mm)
 Ø4.92"(Ø125mm)
 Ø5.31"(Ø135mm)

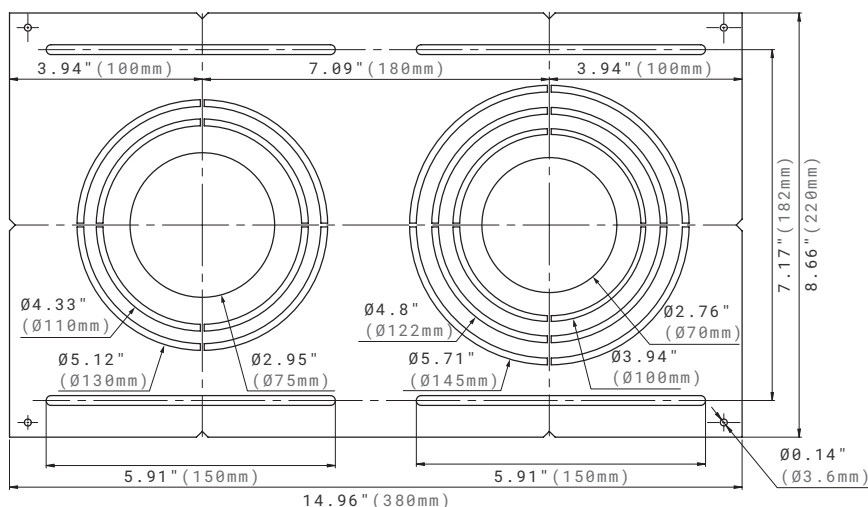

Part#

RIP-70145

New construction pre-mounting plate for Corla Downlight.


Compatible cutouts:

Ø2.76"(Ø70mm)
 Ø2.95"(Ø75mm)
 Ø3.94"(Ø100mm)
 Ø4.33"(Ø110mm)
 Ø4.8"(Ø122mm)
 Ø5.12"(Ø130mm)
 Ø5.71"(Ø145mm)


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

30W

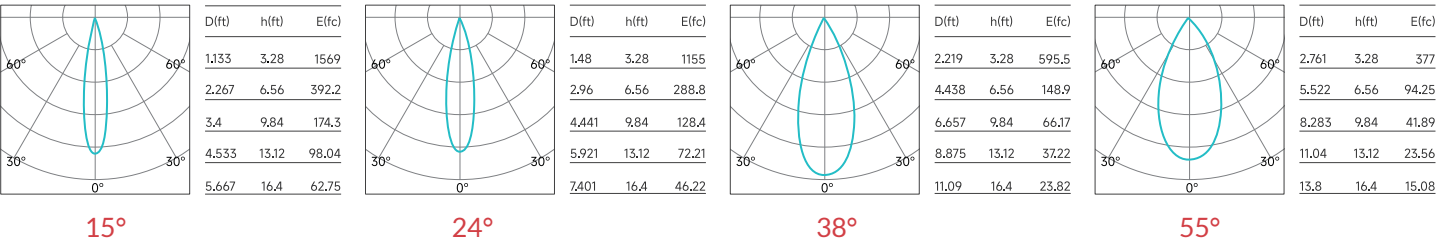

35W

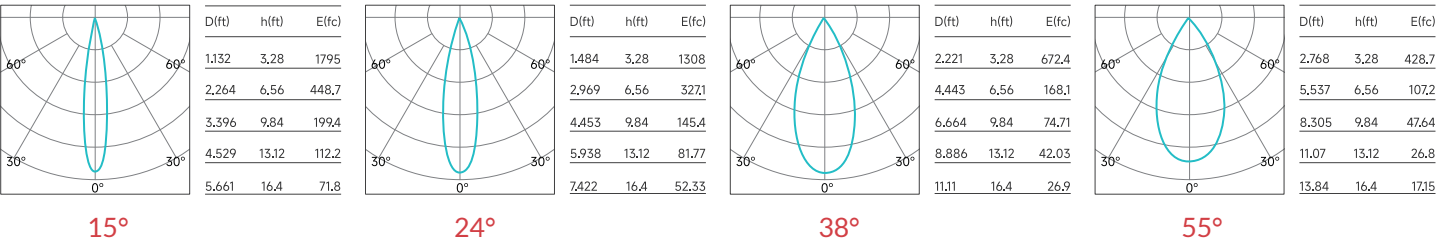

Above test data is based on **Shallow Frame Reflector** trim with 3000K 90CRI LED.

PERFORMANCE DATA

POWER	CCT	CRI	BEAM OPTIC	LUMENS (lm)	EFFICACY (lm/W)	MAX CANDELA (cd)
30W	3000K	90	15°	2688	97	16849
			24°	2723	98	12391
			38°	2719	98	6405
			55°	2655	96	4049
35W	3000K	90	15°	3085	96	19249
			24°	3081	96	14021
			38°	3070	96	7227
			55°	3015	94	4599

Above test data is based on **Shallow Frame Reflector** trim with 3000K 90CRI LED.

LUMEN MULTIPLIERS

CCT	MULTIPLIER
2700K	0.95
3000K	1.00
3500K	1.04
4000K	1.06