



**DARKSKY
APPROVED**
Reduces Light pollution
Certified by DarkSky.org

The Donut LED Bollard features a sleek, slim design with fully shielded light distribution. Constructed with UV powder-coated, die-cast aluminum housing, a molded silicone gasket, and stainless steel screws, this bollard is an excellent choice for walkways, entrances, plazas, court-yards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	14W, 20W, 30W
CRI	80
CCT	3000K, 4000K
	3000K-DarkSky Approved
Driver	0-10V Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-40°F to 104°F(-40°C to 40°C)
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
	DarkSky Approved for CCT of
	3000K and below
Power Factor	>0.9 at 120Vac
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65



FEATURES

- **Optimized Visual Comfort:** Shielded light distribution.
- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.


SPECIFICATION

Dimension


Side View

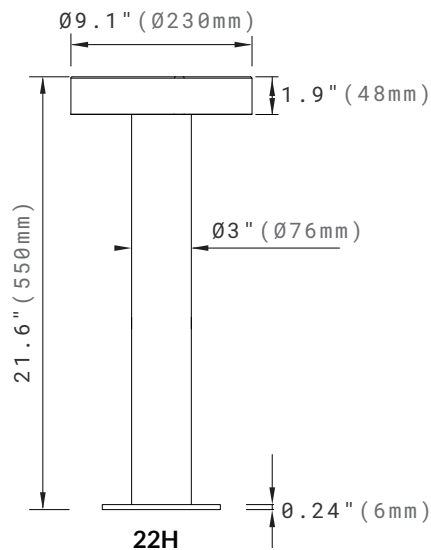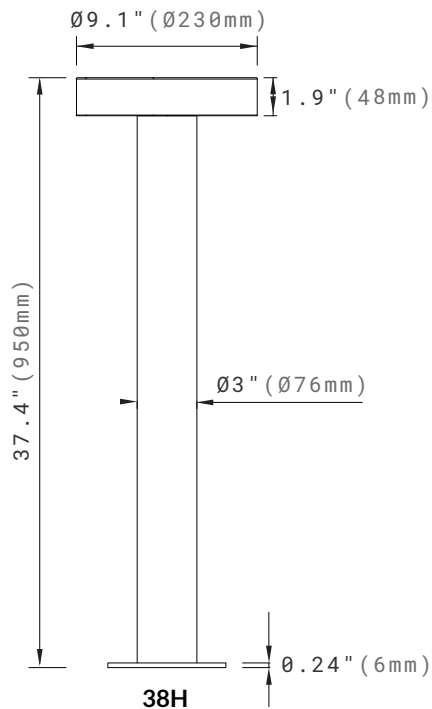

Base Plate

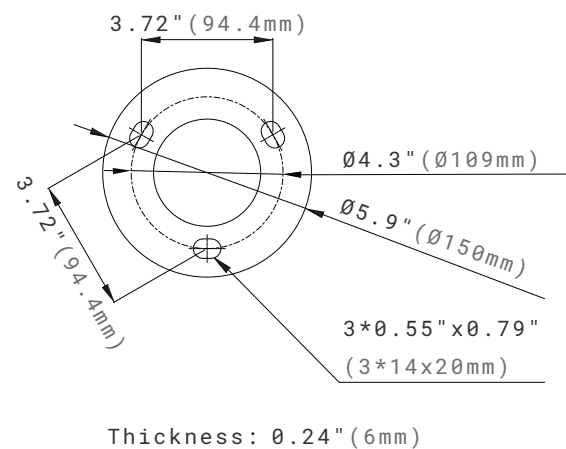

Anchor Bolts

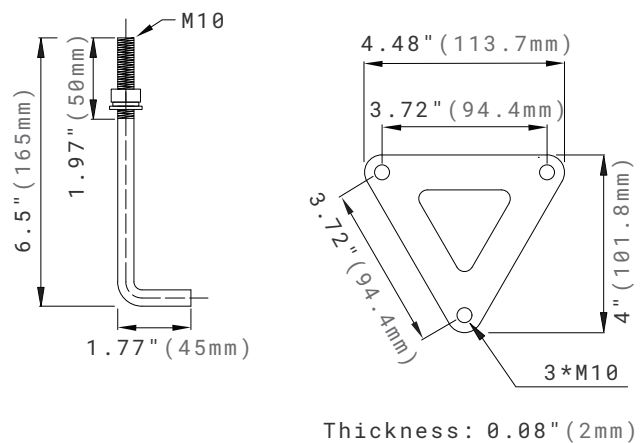

ORDERING INFORMATION

Standard Model

EXAMPLE: DOBD38H-20401-BK

DOBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
DOBD Donut Bollard	22H	14	30	1	BLANK	BK
	21.6" Height	14W	3000K	120-277V	0-10V Dimming Driver	Black
	38H	20	40			Custom Finish Colors ¹
	37.4" Height	20W	4000K			<i>Additional fees applied.</i>
		30				
		30W				

NOTE:

1. The standard finish color is black; Custom finish colors are available at an additional charge. Please contact Customer Service for premium adder.

DarkSky-Approved Model


EXAMPLE: DOBD38H-20301-BK

DOBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
DOBD Donut Bollard	22H	14	30	1	BLANK	BK
	21.6" Height	14W	3000K	120-277V	0-10V Dimming Driver	Black
	38H	20				Custom Finish Colors ¹
	37.4" Height	20W				<i>Additional fees applied.</i>
		30				
		30W				

NOTE:

1. The standard finish color is black; Custom finish colors are available at an additional charge. Please contact Customer Service for premium adder.

ACCESSORIES (ORDERED SEPARATELY)



ABMK-DOBD
Anchor Bolts Mounting Kits.


PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
14W	1100lm	0.12A	80	4000K
20W	1580lm	0.17A	80	4000K
30W	2100lm	0.25A	80	4000K

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

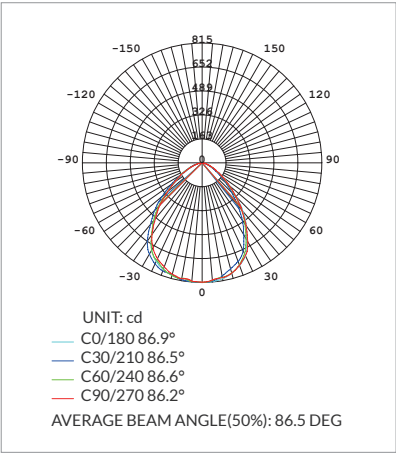

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
DOBD22H-14301	B1-U0-G0
DOBD38H-20301	B1-U0-G0
DOBD38H-30301	B1-U0-G0

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.

Ref#: 20260513