



CAN ICES-005

The Changeable Porla recessed LED downlight has integral driver in a remote driver box. Features in changeable reflectors and trims. Five CCT selectable. Flexibility to switch color temperature during installation with the slide switch located on the cable. Ideal for a variety of applications for both residential and commercial settings.

TECHNICAL DATA

Wattage	8W, 12W
CCT	Selectable 2700K/ 3000K/3500K/ 4000K/5000K
Driver	Triac dimming is standard 0-10V is optional
CRI	90
Input Voltage	120V or 120-277V, 50/60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°F to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 Suitable for wet locations Type IC, Air-Tight RoHs compliant FCC&ICES-005 Compliant. (for 1000LM models and drivers.)
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load


FEATURES

- Five CCT selectable.
- Aluminum construction.
- Changeable reflectors and trims.


SPECIFICATION

8W & 12W Triac Dimming

2" Round Trim

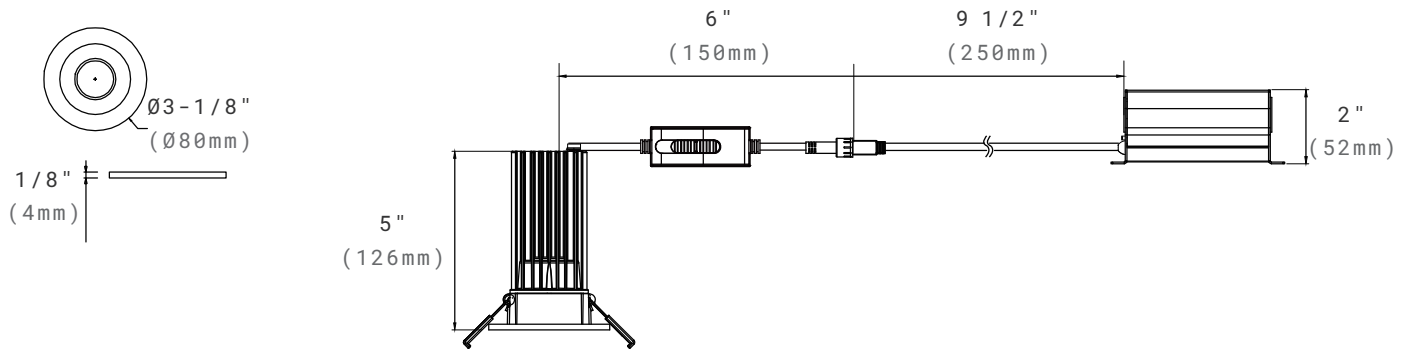


2" Square Trim

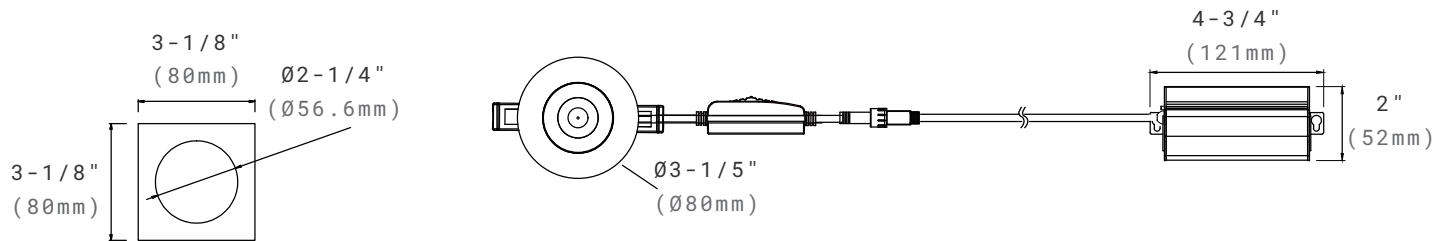


8W & 12W 0-10V Dimming

2" Round Trim


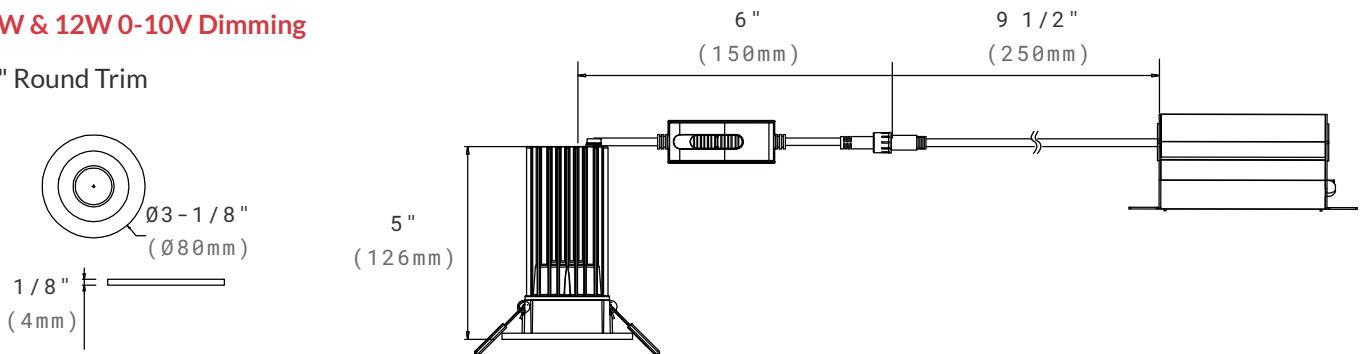


2" Square Trim

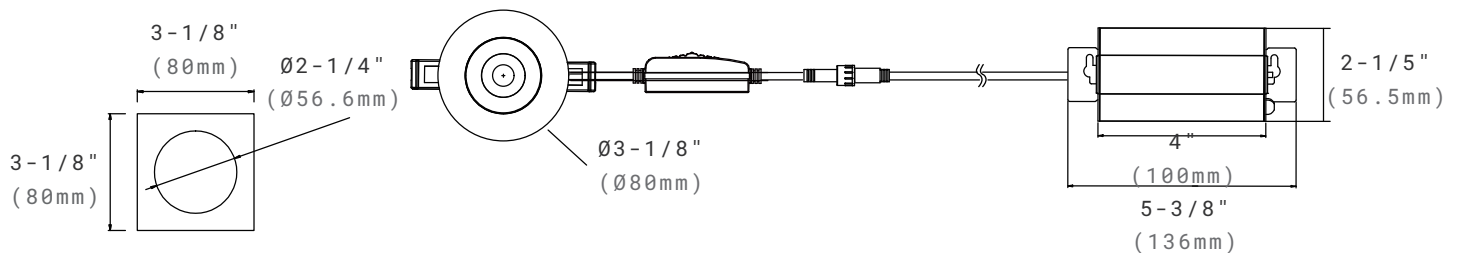


SPECIFICATION

New Construction Rough-in plate

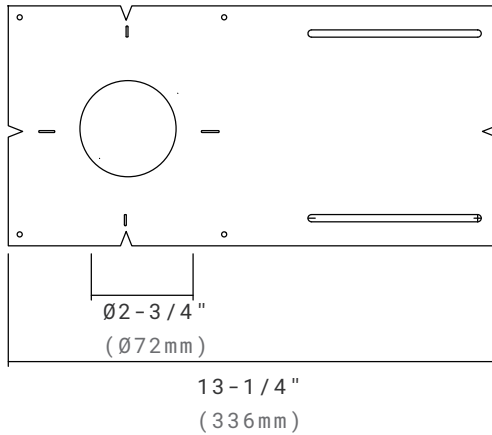

Installation

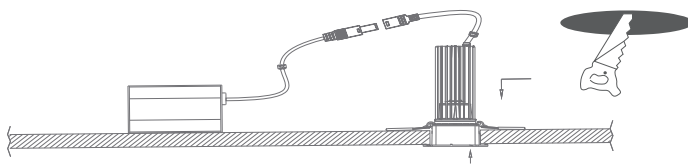

Cut Hole Size
Ø2 - 7/8" (Ø72mm)

ORDERING INFORMATION

EXAMPLE: POR02-CH-10LM-90-38-CR-RD-WH

POR								
Series	Size	Changeable	Lumens	CRI	Beam Angle	Reflector or Baffle	Trim Option	Trim Color ²
POR	02 2"	CH Changeable	06LM 8W 600lm 10LM ³ 13W 1000lm	90 90CRI	38 38° 60 60°	CR Chrome Reflector SR Satin Reflector BR Black Reflector WR White Reflector CB Chrome Baffle SB Satin Baffle BB Black Baffle WB White Baffle	RD Round SQ Square SA Slot Aperture WW Wall Wash PH Pinhole SH Square Hole SR Shower	WH White Black Black NK Nickel

Driver Options

POR02-08W-4 - 600lm Triac Dimmable Driver

POR02-DL/ADJ-08W-1 - 600lm 0-10V Dimmable Driver

POR02-12W-4³ - 1000lm Triac Dimmable Driver

POR02-12W-1³ - 1000lm 0-10V Dimmable Driver

NOTE:

1. 2700K, 3000K, 3500K, 4000K, 5000K selectable; 3000K is default setting.
2. Custom finish color is available for trim and additional charge will apply for custom finish.
3. The 1000LM models and drivers comply with FCC & ICES-005.

Reflector & Baffle Options



Chrome
Reflector



Satin
Reflector



Black
Reflector



White
Reflector



Chrome
Baffle



Satin Baffle



Black Baffle



White Baffle

Trim Options



Round



Square



Slot Aperture



Wall Wash



Pinhole



Square Hole




Shower

Trim Colors



Black




White



Nickel

ACCESSORIES



RIP-72

New construction
Rough-in plate
Opening Ø2-7/8"(Ø72mm).



POR-EXC6-FT6

6 feet cable.

POR-EXC10-FT6

10 feet cable.

POR-EXC20-FT6

20 feet cable.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Size	2 Inch Changeable					2 Inch Changeable				
Wattage	8W					12W				
Lumen	600lm					1000lm				
CCT	2700K	3000K	3500K	4000K	5000K	2700K	3000K	3500K	4000K	5000K
Beam Angle	38°/60°					38°/60°				
CRI	90					90				
Dimming	Triac or 0-10V dimming					Triac or 0-10V dimming				
Cut Out	Ø2-7/8"(72mm)					Ø2-7/8"(72mm)				

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.

Ref#: 20260521