



FEATURES

- Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare.
- This 1 5/8" thick luminaire are easy to install on standard j-boxes with a quick snap.
- Type IC, Air-Tight & Damp - No Housing Required.
- Fast Installation & No Junction Box Needed.
- 100%-10% triac dimming capability.



The 4" indirect Downlight comes in round shape with integral driver in a remote driver box. Durable airtight aluminum body with etched white polycarbonate diffuser lens for low glare control. 2200K-3000K dim to warm concept, generating a warm and exquisite environment.

TECHNICAL DATA

Wattage	12W
Lumen Output	550lm
CCT	Dim to warm (2200-3000K)
Driver	Triac dimming
CRI	90
Input Voltage	120V, 60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
	Suitable for damp locations
	IC rated
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

PERFORMANCE DATA


Lumen value is measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	CCT	Beam Angle	CRI	Cut Out
12W	550lm	Dim to Warm 2200K-3000K	110°	90	Ø4.25"


**Lumen value is based on 3000K.*

DIMENSION

Fixture

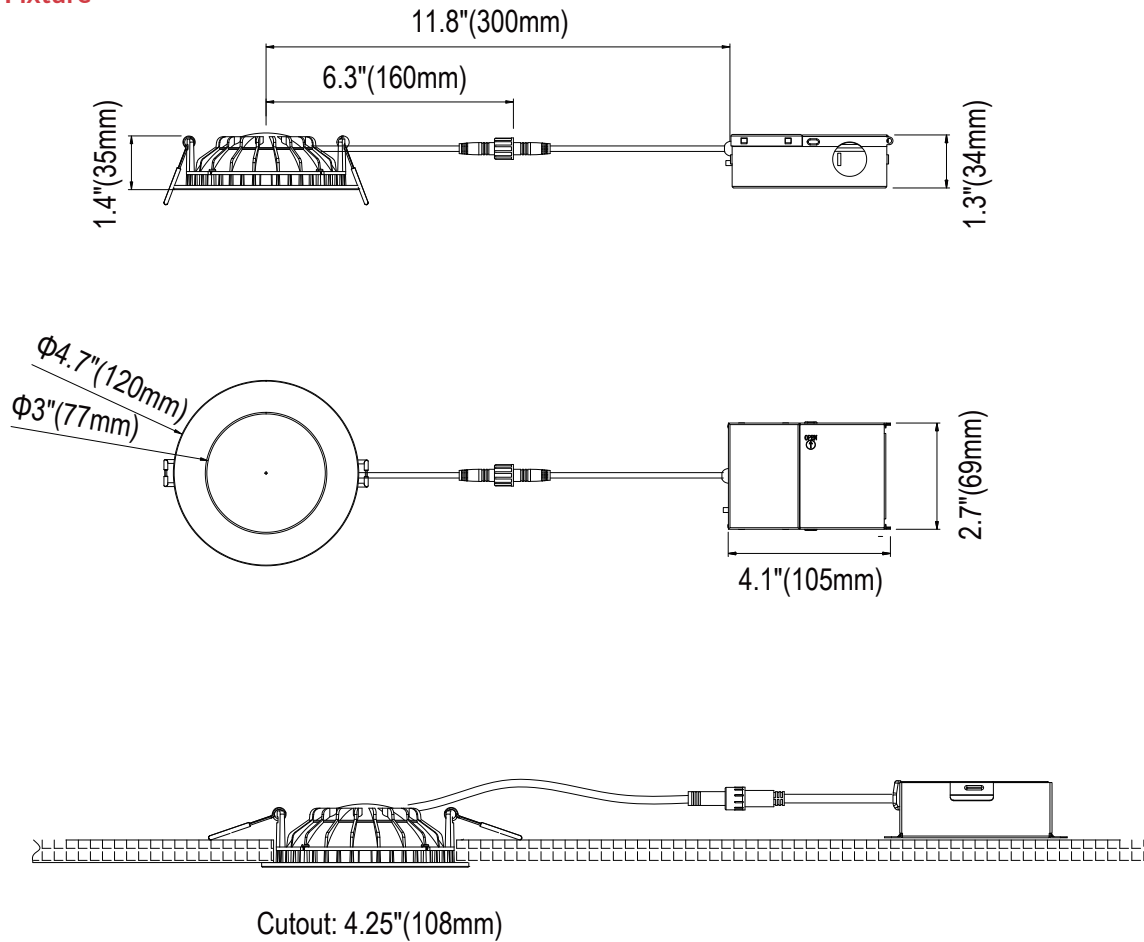

Pre-mounting Plate

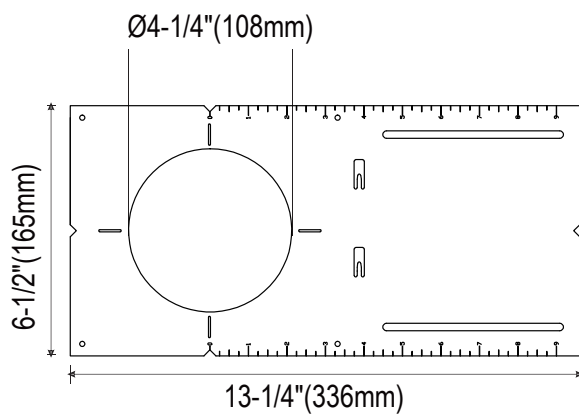

ORDERING INFORMATION


EXAMPLE: IDDL04R-55LM-DW90-MWH

IDDL							Driver Option <i>*Dirver needs to be ordered separately and field installed.</i>
Series	Size	Shape	Lumen	CCT	CRI	Trim Finish	
IDDL Idirect downlight	04 4"	R Round	55LM 550lm	DW Dim to warm 2200K-3000K	90 90CRI	MWH Matte White MBK Matte Black	IDDL04-12W-4 12W Triac Dimmable Driver

NOTE:

Custom finish color is available for trim and additional charge will apply for custom finish.

ACCESSORIES (ORDERED AND SHIPPED SEPARATELY)

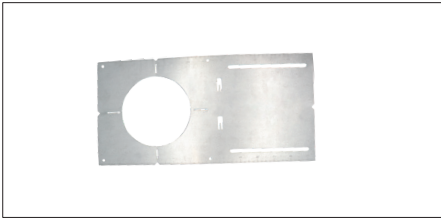

POR04-ADJ-RIP1

New construction
pre-mounting plate
opening Ø4-1/4" (108mm)

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.