

4" PORLA LED DOWNLIGHT

Adjustable 30° (600lm & 1100lm)



CAN ICES-005

The 4" Porla Recessed LED Downlight features in 30° tilt angle. Integral driver in a remote driver box. Five CCT selectable. Flexibility to switch color temperature during installation with the slide switch located on the fixture. Reflector optic design. Ideal for a variety of applications for both residential and commercial settings.

TECHNICAL DATA

Wattage	9W, 13W
Lumen Output	650lm, 1100lm
CCT	Selectable 2700K/3000K/3500K /4000K/5000K default setting: 3000K
Driver	Tiac dimming - Standard 0-10V dimming - Optional
CRI	90
Input Voltage	120V or 120-277V, 50/60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant IC Rated Suitable for wet locations FCC & ICES-005 Compliant (for 1100LM models and drivers.)
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES


- **Versatile Design Options:** Five CCT selectable, Head is adjustable with a 30° tilt angle.
- **Reliable Design:** Type IC rated-no housing needed, Aluminum construction.

4" PORLA LED DOWNLIGHT


Adjustable 30° (600lm & 1100lm)

SPECIFICATION


650lm/1100lm (Round Trim)

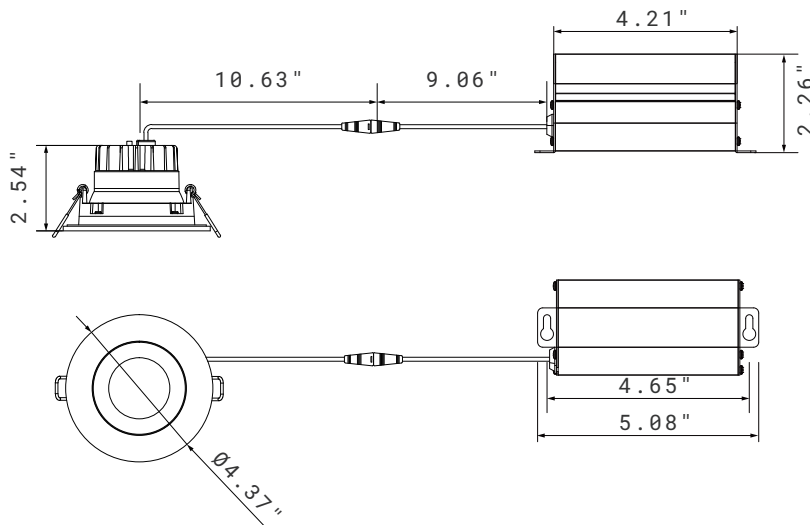

Side View

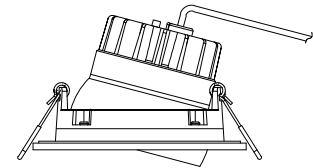


Tilt Angle. 30°
Fixture



Driver

Rough in Plate for 650/1100lm Ø3.74"

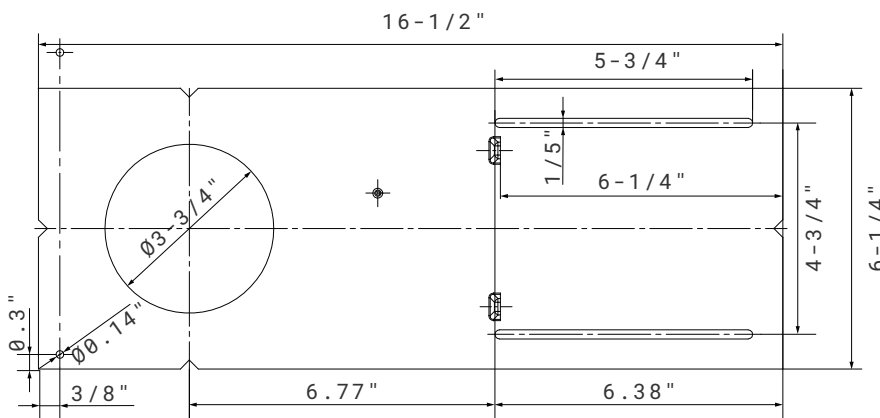

4" PORLA LED DOWNLIGHT

Adjustable 30° (600lm & 1100lm)

ORDERING INFORMATION


EXAMPLE: POR04-G2-ADJ30-R-11LM-90-MWH

POR							
Series	Size	Generation	Downlight/ Adjustable	Shape	Lumens/CRI	Trim Finish ¹	Driver Option
POR	04 4"	G2 Generation 2	ADJ Adjustable Tilt 30°	R Round	65LM-90 650lm/90CRI 11LM-90 ³ 1100lm/90CRI	MWH Matte White MBK Matte Black	POR04-ADJ30-09W-4 9W Triac Dimmable Driver for 650lm POR04-ADJ30-13W-4 13W Triac Dimmable Driver for 1100lm POR04-ADJ30-13W-1 13W 0-10V Dimmable Driver for 1100lm POR04-ADJ30-13W-1-XD³ 13W 0-10V/Triac Dimming Driver for 1100lm

NOTE:

1. White trim is standard. Other finish colors have MOQ and additional charge, Please contact the Customer Service for details.
2. 2700K, 3000K, 3500K, 4000K, 5000K selectable. 3000K is default setting.
3. The 1100LM models and drivers comply with FCC & ICES-005.

ACCESSORIES (ORDERED AND SHIPPED SEPARATELY)

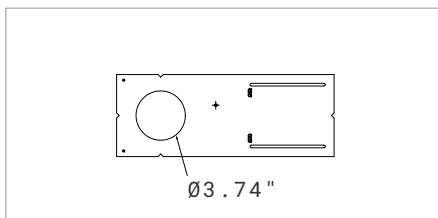

POR04-RIP-N

New Construction.

Pre-mounting Plate.

Opening Ø3.74" for 650lm and 1100lm.

4" PORLA LED DOWNLIGHT

Adjustable 30° (600lm & 1100lm)



Ref#: 20260520

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

Size	Nominal Wattage	Lumen Output	CCT	Beam Angle	Tilt Angle (ADJ)	CRI	Dimming	Cut Out
4 Inch ADJ 30°	9W	650lm@3000K	Selectable 2700K/3000K/ 3500K/4000K/ 5000K	38 degree	30 degree	90	Triac or 0-10V Dimming	Ø3.74"
	13W	1100lm@3000K						

Lumen Multiplier

2700K	0.96
3000K	1
3500K	1.05
4000K	1.06
5000K	1.03

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.