



CAN ICES-005

The Changeable Porla recessed LED downlight has integral driver in a remote driver box. Features in changeable reflectors and trims. Five CCT selectable. Flexibility to switch color temperature during installation with the slide switch located on the cable. Ideal for a variety of applications for both residential and commercial settings.

TECHNICAL DATA


Wattage	12W, 18W, 25W
CCT	Selectable 2700K/ 3000K/3500K/ 4000K/5000K
Driver	Triac dimming is standard 0-10V is optional
CRI	90
Input Voltage	120V or 120-277V, 50/60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 Suitable for wet locations 1000lm is IC rated 2000lm is Non-IC rated RoHs compliant FCC&ICES-005 Compliant. (for 1000LM/ 1500LM models and drivers.)
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES


- Five CCT selectable.
- Aluminum construction.
- Changeable reflectors and trims.

SPECIFICATION

Round 12W

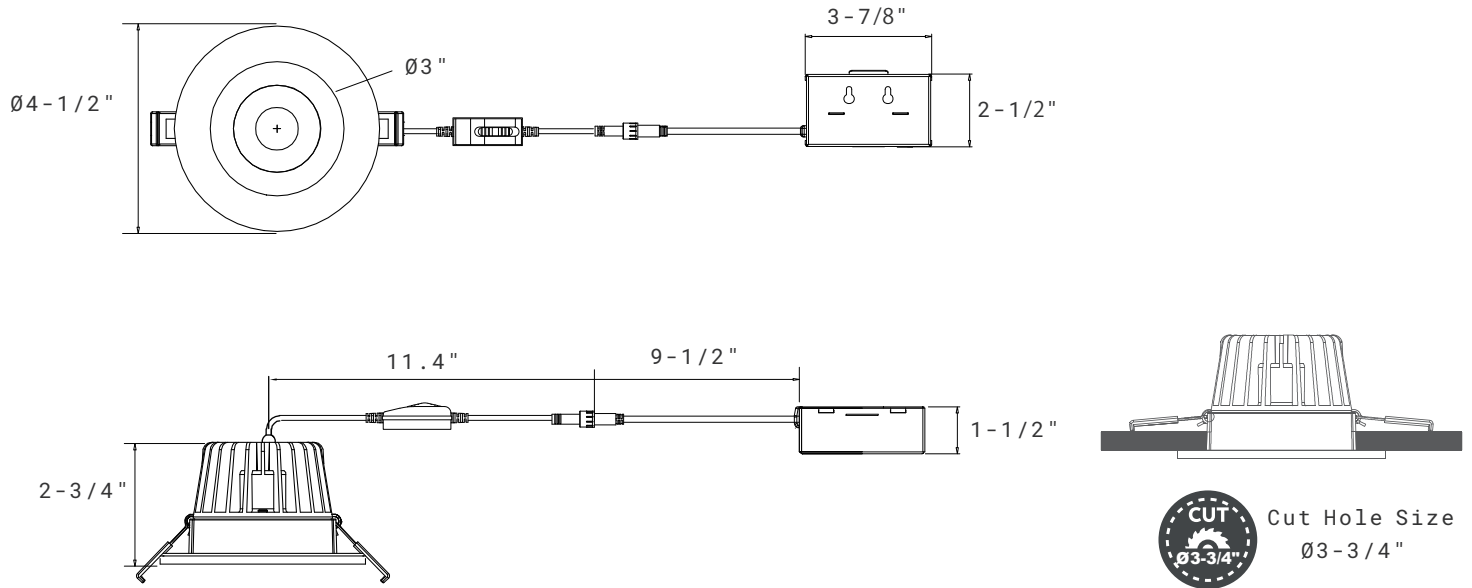


Round 18W and 25W

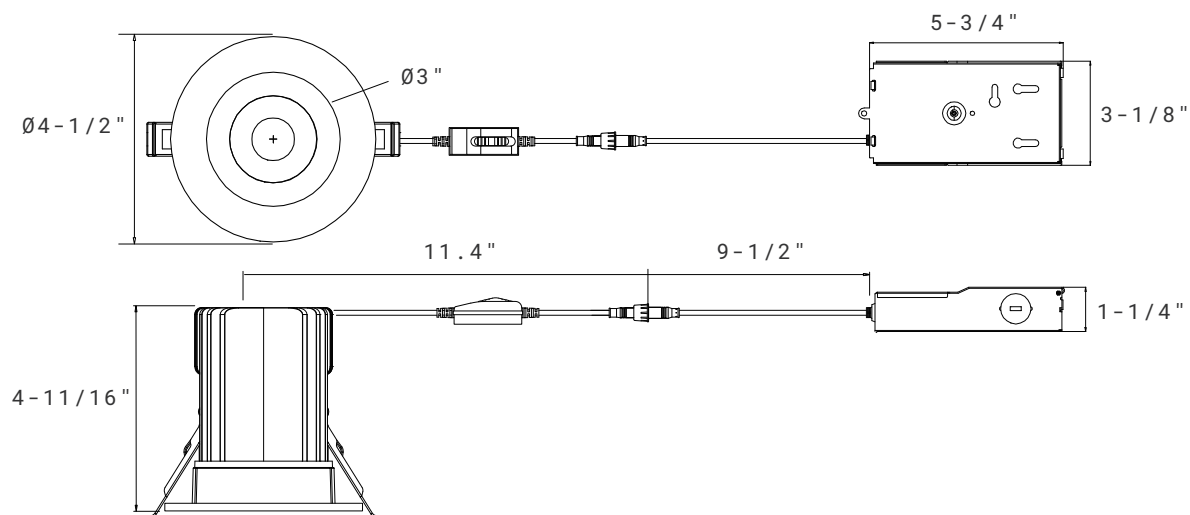


SPECIFICATION

Square 12W

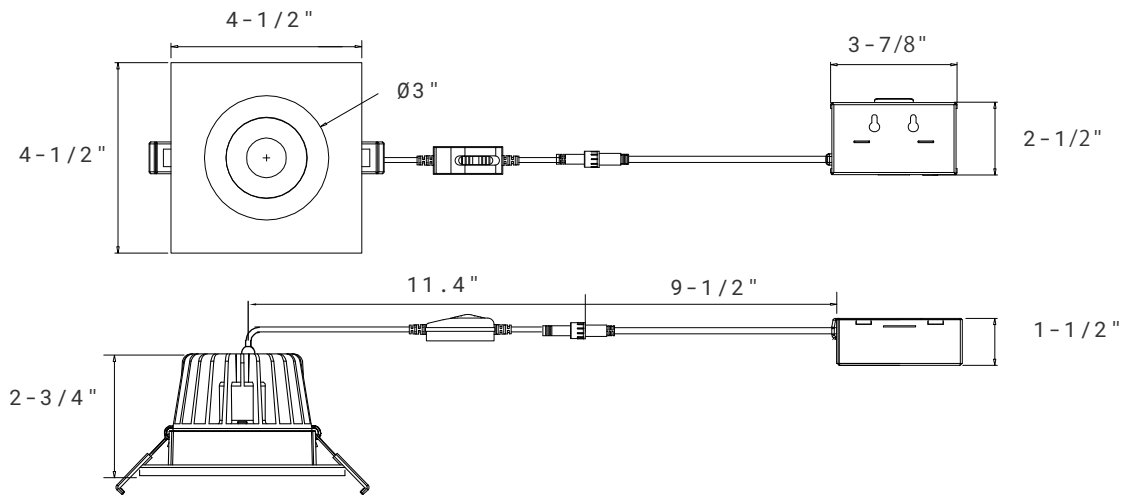

Square 18W and 25W

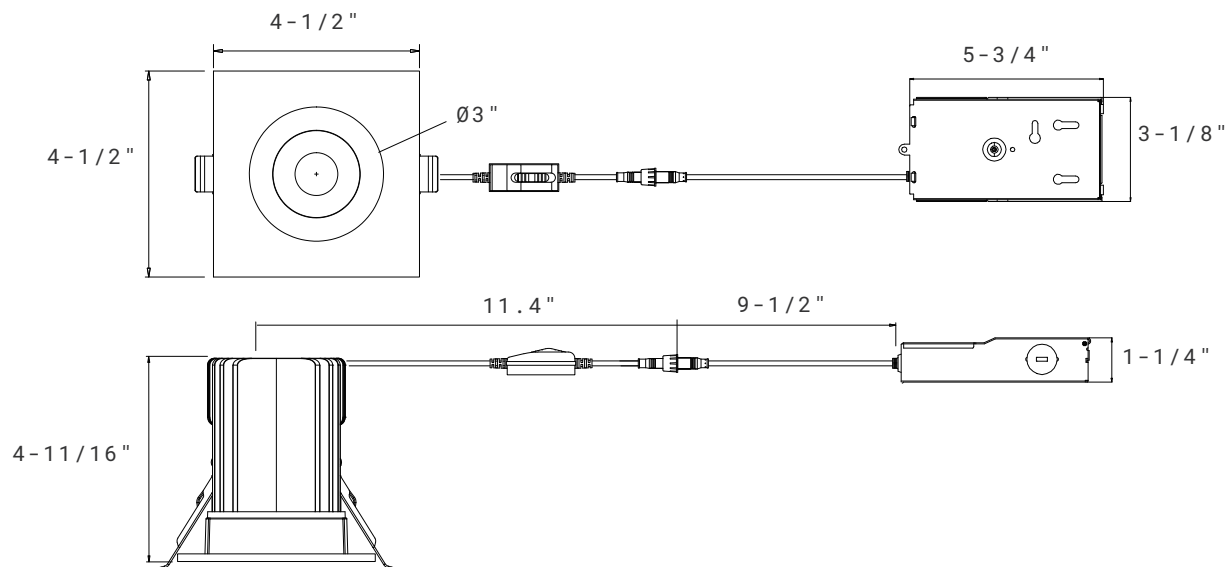

ORDERING INFORMATION

EXAMPLE: POR04-CH-10LM-90-38-CR-RD-WH

POR								
Series	Size	Changeable	Lumens	CRI	Beam Angle	Reflector or Baffle	Trim Option	Trim Color ²
POR	04 4"	CH Changeable	10LM ³ 12W 1000lm 15LM ³ 18W 1500lm 20LM 25W 2000lm	90 90CRI	38 38° 60 60°	CR Chrome Reflector SR Satin Reflector BR Black Reflector WR White Reflector CB Chrome Baffle SB Satin Baffle BB Black Baffle WB White Baffle	RD Round SQ Square SR Shower WW Wall Wash	WH White BK Black NK Nickel

Driver Options

POR04-12W-4³ - Triac Dimmable Driver for 1000lm downlight, 120V.

POR04-12W-1³ - 0-10V Dimmable Driver for 1000lm downlight, 120-277V.

POR04-25W-4 - Triac Dimmable Driver for 2000lm downlight, 120V.

POR04-25W-1 - 0-10V Dimmable Driver for 2000lm downlight, 120-277V.

POR04-25W-8 - 0-10V Dimmable Driver for 2000lm downlight, 120-347V.

POR04-18W-4³ - 1Triac Dimmable Driver for 1500lm downlight, 120V.

POR04-18W-1³ - 0-10V Dimmable Driver for 1500lm downlight, 120-277V.

POR04-18W-8 - 0-10V Dimmable Driver for 1500lm downlight, 120-347V.

NOTE:

1. 2700K, 3000K, 3500K, 4000K, 5000K selectable; 3000K is default setting.
 2. Custom finish color is available for trim and additional charge will apply for custom finish.
 3. The 1000LM/1500LM models and drivers comply with FCC & ICES-005.
-

Reflector & Baffle Options

Chrome
Reflector



Satin
Reflector



Black
Reflector



White
Reflector



Chrome
Baffle



Satin Baffle



Black Baffle



White Baffle

Trim Options

Round



Square




Shower



Wall Wash

Trim Colors

Black




White



Nickel

ACCESSORIES

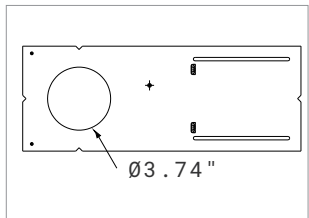

POR04-RIP-N
Rough-in plate.



POR-EXC6-FT6
6 feet cable.
POR-EXC10-FT6
10 feet cable.
POR-EXC20-FT6
20 feet cable.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	CCT	Lumen	Beam Angle	CRI	Dimming	Cut Out
12W	2700K	830lm	38°/60°	90	Triac or 0-10V dimming	Ø3-3/4"
	3000K	870lm				
	3500K	1000lm				
	4000K	1040lm				
	5000K	1000lm				
18W	2700K	1460lm	38°/60°	90	Triac or 0-10V dimming	Ø3-3/4"
	3000K	1520lm				
	3500K	1580lm				
	4000K	1600lm				
	5000K	1620lm				
25W	2700K	1900lm	38°/60°	90	Triac or 0-10V dimming	Ø3-3/4"
	3000K	1950lm				
	3500K	2050lm				
	4000K	2050lm				
	5000K	2000lm				

WARRANTY

5 year limited warranty.
Specifications subject to change without notice.