




Optional Pole Finishing



Light wood texture



Deep wood texture



The Arbor LED Bollard features attractively shielded light distribution, with a fully shielded light source that effectively minimizes upward light spill for enhanced safety and passerby comfort. Constructed with superior UV-resistant powder coating, a high-quality die-cast aluminum body, tempered safety glass lens, molded silicone gasket, and stainless steel screws, it delivers durability and precision. A distinctive wood texture finish is also available. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

Wattage	10W
CRI	80
CCT	3000K, 4000K 3000K-DarkSky Approved
Driver	Non-Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-22°F to 104°F (-30°C to 40°C)
Certifications	cETL listed Suitable for wet location RoHS compliant DarkSky Approved for CCT of 3000K and below
Power Factor	>0.9 at 120 Vac
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65


FEATURES

- **Optimized Visual Comfort:** Fully shielded light source.
- **Versatile Application:** Ideal for a wide range of exterior spaces.
- **Premium Construction:** UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.


SPECIFICATION

Dimension


Side View

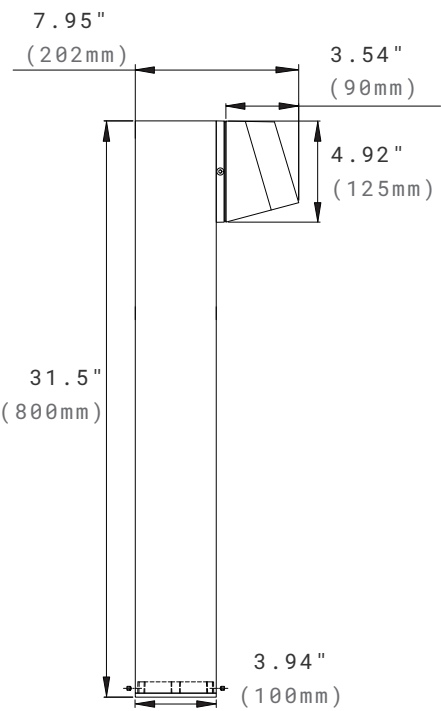

Base Plate

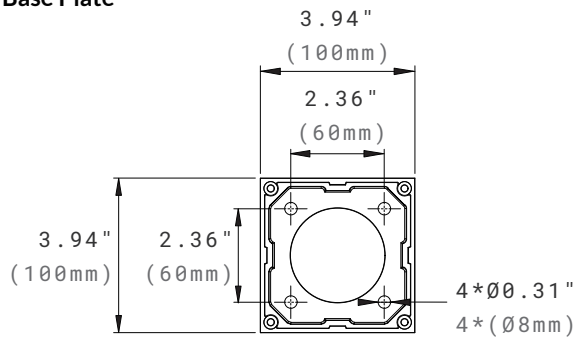

Anchor Bolts

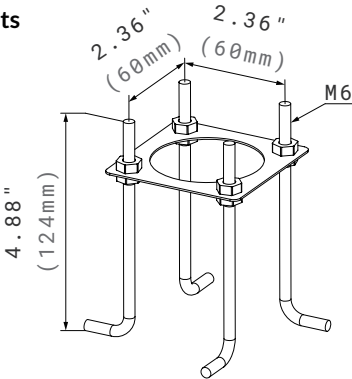

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	CCT
10W	490LM	0.08A	80	3000K

ORDERING INFORMATION

Standard Model

EXAMPLE: ARBD32H-10401-BK

ARBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
ARBD Arbor Bollard	32H 31.5" Height	10 10W	30 3000K 40 4000K	1 120-277V	BLANK On/Off	BK ¹ Black RAL 7021 GY ¹ Gray RAL 7043 Wood Texture Optional² <i>Additional fees applied.</i>

NOTE:

1. Black RAL 7021 and Gray RAL7043 are standard finishes at no extra cost.
2. Setup fees apply for the Wood Texture finish and other custom finishes. Please contact the Customer Service for details.

DarkSky-Approved Model

EXAMPLE: ARBD32H-10301-BK

ARBD						
Series	Height	Wattage	CCT	Voltage	Control	Finish
ARBD Arbor Bollard	32H 31.5" Height	10 10W	30 3000K	1 120-277V	BLANK On/Off	BK ¹ Black RAL 7021 GY ¹ Gray RAL 7043 Wood Texture Optional² <i>Additional fees applied.</i>

NOTE:


1. Black RAL 7021 and Gray RAL7043 are standard finishes at no extra cost.
2. Setup fees apply for the Wood Texture finish and other custom finishes. Please contact the Customer Service for details.

WOOD TEXTURE OPTIONS



LWTC-1/2-TP
Pole finish
1/2 light wood texture on the top, and
1/2 black on the bottom.

LWTC-2/3-TP
Pole finish
2/3 light wood texture on the top, and
1/3 black on the bottom.




DWTC-1/2-TP
Pole finish
1/2 deep wood texture on the top, and 1/2
black on the bottom.

DWTC-2/3-TP
Pole finish
2/3 deep wood texture on the top, and 1/3
black on the bottom.

Notes: For alternative finish/paint ratios, please contact Customer Service.

ACCESSORIES (ORDERED SEPARATELY)



ABMK-ARBD
Anchor Bolts Mounting Kits.

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
ARBD32H_10301_BK	B0-U0-G0
ARBDXXH_10301_BK	B0-U0-G0

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.