



The Mini Carlo Accent Light is a compact, versatile LED fixture for precise illumination. Its slim profile allows it to blend seamlessly into any environment. Its 360° rotation and 180° tilt ensure exceptional positioning flexibility, while optional retractable shrouds and extended brackets allow broader vertical surface coverage. Available in multiple beam patterns and power options, it delivers controlled lighting for various applications with minimal spill.

TECHNICAL DATA

Wattage	3W, 3W*2
CCT	2700K, 3000K, 4000K, 5000K
Beam Angle	15°/25°/30°/H30°*V15°
CRI	80
Input Voltage	120-277V/AC, 50/60Hz
Projected Lifetime	L70-100,000 hours
Operating Temp.	-40°F to 113°F (-40°C to 45°C)
Certifications	cETLus
	RoHS compliant
Harmonic Distortion	<20% at full load
IP Rating	65



FEATURES

- **Adjustability & Adaptability:** Selection of beam angles and mountings. 360° rotatable and 180° tiltable.
- **Durable Construction:** Die-cast aluminum housing. Polycarbonate Lens. Marine grade treatment available.
- **Visual Comfort Optimization:** Optional shrouds for visual comfort.


SPECIFICATION

Dimension



3W



Angled Retractable Shroud



3W*2

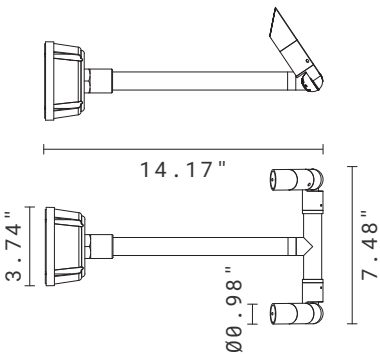

Angled Retractable Shroud

MOUNTINGS



Canopy Cover



Canopy
with extended arm




Ground stake



Tree strap

ORDERING INFORMATION

EXAMPLE: CARLO-C03301-30-CN-AS-BK-1.8FT

CARLO									
Series	Wattage	CCT	Voltage	Beam Angle	Mounting	Shroud	Housing Color	Cable Length	Option
CARLO	C03 3W	27 2700K 30 3000K 40 4000K 50 5000K	1 120-277 V/AC	15 15° 25 25° 30 30° 3515 H35°V15°	CN Canopy Cover Ground Mount  Wall Mount 	NS No shroud AS Angled Retractable Shroud	BK ¹ Black RAL9011 Black is the standard housing color. Custom colors are available at an additional charge. WH White RAL9016 GY Gray RAL7012 BZ Mineral Bronze SL Silver RAL9006	1.8FT ² 1.8ft cable is the standard cable length. Custom lengths are available at an additional charge.	BLANK None M Marine ambient corrosion resistance
	C3x2 3W*2	27 2700K 30 3000K 40 4000K 50 5000K	1 120-277 V/AC	15 15° 25 25° 30 30° 3515 H35°V15°	EAR Extended Arm				


NOTE:

1. The standard finish color is black. Custom colors are available at an additional charge.
2. The standard cable length is 1.8ft. Custom cable lengths are available at an additional charge.

Shrouds



No Shroud



Angled Retractable Shroud

Housing Color



Black RAL9011



White RAL9016



Gray RAL7012




Mineral Bronze



Silver RAL9006

ACCESSORIES (ORDERED SEPARATELY)

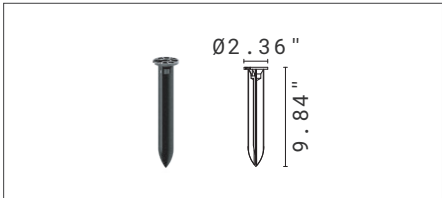

HOFL-GDSK-AL
Aluminum Ground stake,
Max loading ≤10kg,
Incapable in corrosive area.



HOFL-TRSP
Tree Strap,
Clamping area Ø 5.9" ~ 11.9".

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNALM-79-08 as well as Lighting Facts listed.

WATTAGE	BEAM ANGLE	LUMENS (lm)	CCT	CRI
3W	15°	46lm	3000K	80
3W	25°	50lm	3000K	80
3W*2	15°	82lm	3000K	80
3W*2	25°	100lm	3000K	80
3W*2	30°	114lm	3000K	80
3W*2	H35° x V15°	94lm	3000K	80

WARRANTY

Five year limited warranty.
Specifications subject to change without notice.