# SVAN LED VANITY LIGHT

ABOVE ALL
www.AboveAllLighting.com

The SVAN LED Bath and Vanity Light looks modern and up to date. It has brushed nickel stainless steel base and PMMA white diffuser. 3000K, 4000K and 5000K selectable. It brings you a bright and beautiful bathroom.

## TECHNICAL DATA

| | |
|---|---|
| **Wattage** | 25W, 30W, 35W, |
| **Lumen Output** | 2500lm, 3000lm, 3500lm |
| **CCT** | Selectable 3000K/4000K/5000K |
| | default setting: 4000K |
| **Length** | 24inch, 36inch, 48inch |
| **Driver** | 120V — Triac dimming |
| Optional | 120V-277V — 0-10V dimming |
| **CRI** | 80 |
| **Input Voltage** | 120V or 120V-277V, 50/60Hz |
| **Projected Lifetime** | L70-50,000 Hours |
| **Operating Temp.** | -4°F to 104°F (-20°C to 40°C) |
| **Certifications** | ETL Listed |
| | RoHS compliant |
| | Suitable for damp locations |
| **Power Factor** | >0.9 at full load |
| **Harmonic Distortion** | <20% at full load |

## FEATURES

- **Material & Design:** Brushed nickel stainless steel, white PMMA diffuser.
- **Function & Compatibility:** Wattage and CCT selectable, 120V triac dimmable, compatible with various J-box, suitable for damp locations. Optional: 120V-277V 0-10V dimming.


©2026 ABOVE ALL Lighting, Inc. All rights reserved.

## SPECIFICATION

### Dimension

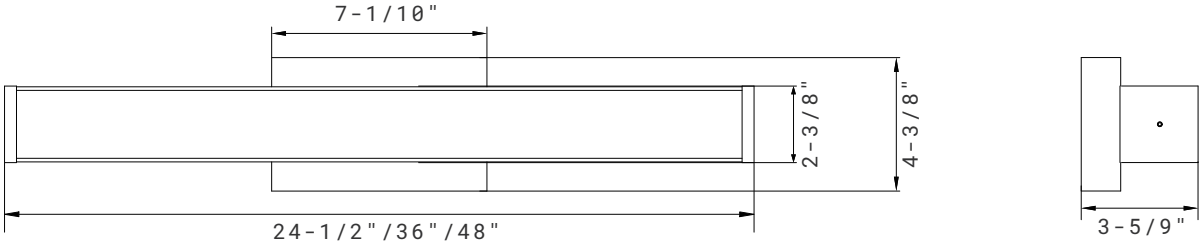


## ORDERING INFORMATION

EXAMPLE: SVAN24-25SW804-BN

| SVAN | | | | | | |
|---|---|---|---|---|---|---|
| **Series** | **Size** | **Wattage** | **CCT** | **CRI** | **Voltage** | **Finish[2]** |
| **SVAN** | **24**<br>24" | **25**<br>25W | **SW[1]**<br>Selectable<br>3000K<br>4000K[1]<br>5000K | **80**<br>80CRI | **1**<br>120-277V<br>0-10V dimming<br>**4**<br>120V<br>Triac dimming | **BN**<br>Brushed Nickel[2] |
| | **36**<br>36" | **30**<br>30W | | | | |
| | **48**<br>48" | **35**<br>35W | | | | |

**NOTE:**

1. 4000K is default setting.
2. Brushed nickel is standard. Custom colors are available at an additional charge. Please contact the Customer Service for details.

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

**Lumen Output**

| Wattage | Lumen Output | AC Input 120V | CCT | CRI | LPW |
|---|---|---|---|---|---|
| 25W | 2500lm | 0.21A | 4000K | 80 | 100 |
| 30W | 3000lm | 0.25A | 4000K | 80 | 100 |
| 35W | 3500lm | 0.29A | 4000K | 80 | 100 |


©2026 ABOVE ALL Lighting, Inc. All rights reserved.

## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

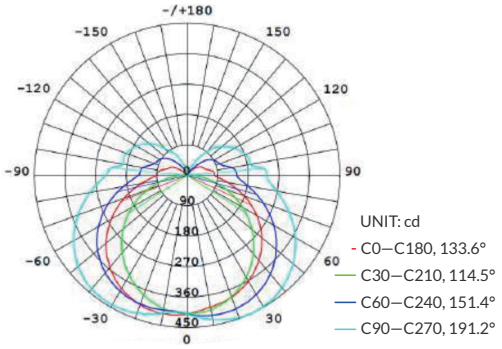


AVERAGE BEAM ANGLE(50%): 147.7 DEG

## WARRANTY

5 years limited warranty.
Specifications subject to change without notice.


©2026 ABOVE ALL Lighting, Inc. All rights reserved.