




The versatile and reliable Umbra series features robust, corrosion-resistant die-cast aluminum housing and an IK08-rated tempered glass lens, ensuring suitability for diverse environments and climates. It offers Type II, III, IV, or V light distributions through high-performance optical lenses. Designed with flexible mounting options, Umbra delivers versatile exterior and interior lighting solutions.

TECHNICAL DATA

Wattage	30W, 50W, 70W, 90W
CCT	2700K, 3000K, 3500K, 4000K Amber (585nm to 597nm)
CRI	80
Driver	0-10V dimming (0%-100%)
Input Voltage	120-347V
Projected Lifetime	L70-144,000 hours
Operating Temperature	-40°F to +104°F (-40°C to +40°C)
Certifications	ETL Listed
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	65
IK Rating	08
Net Weight	16lbs

FEATURES

- **Mounting Options:** Wall mount, slip fitter or pole mount.
- **Robust Construction:** Corrosion-resistant die-cast aluminum housing and IK08-rated tempered glass. Built for harsh climates.
- **Optional Add-ons:** 3-PIN receptacle with photocontrol, 7-PIN receptacle with shorting cap pre-installed.
- **Precise Control:** Type II, III, IV or V light distribution via high performance optical lenses.

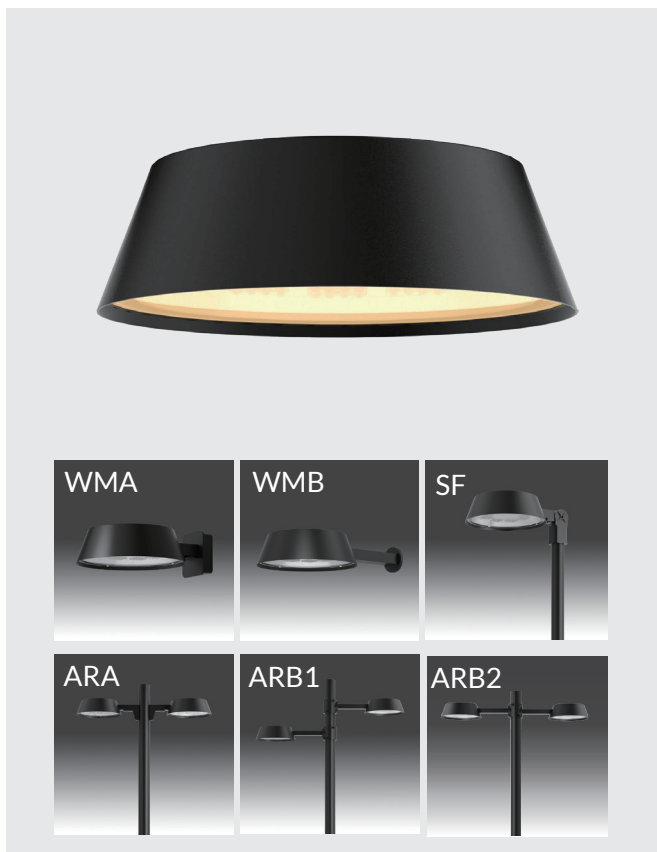


Turtle-friendly Amber




The turtle-friendly amber (585nm to 597nm) is a specialized CCT designed to protect sea turtles and marine life. Ideal for beachfront resorts, coastal homes, and other areas near turtle habitats.

DIMENSION


Wall Mount A (WMA)

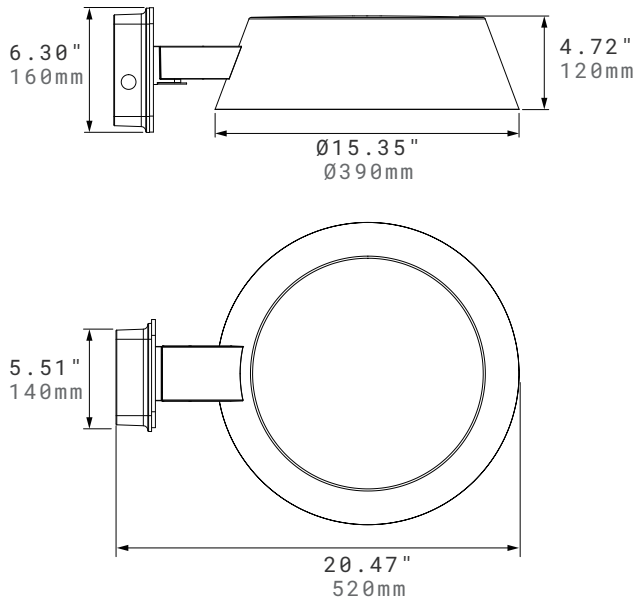


Wall Mount B (WMB)

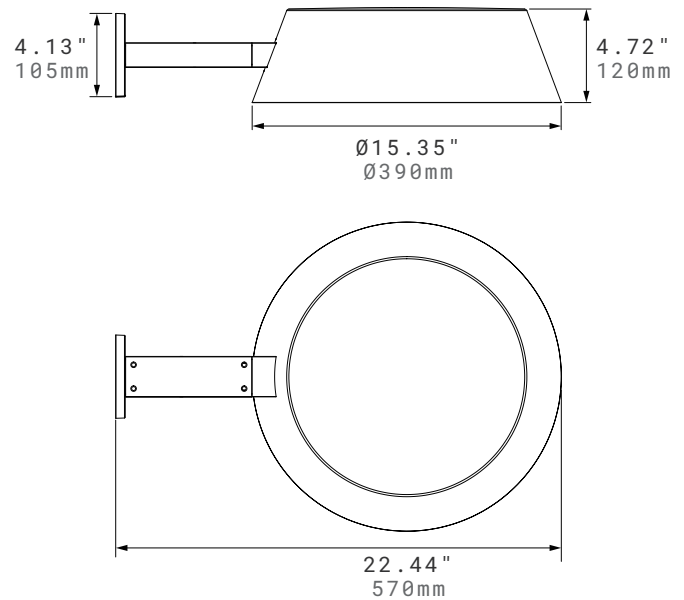

Slip Fitter (SF)

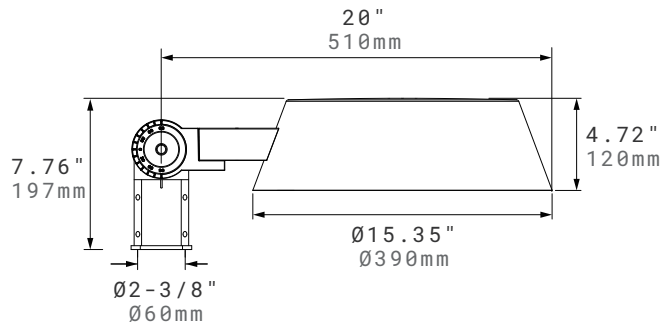


Arm Mount A (ARA)

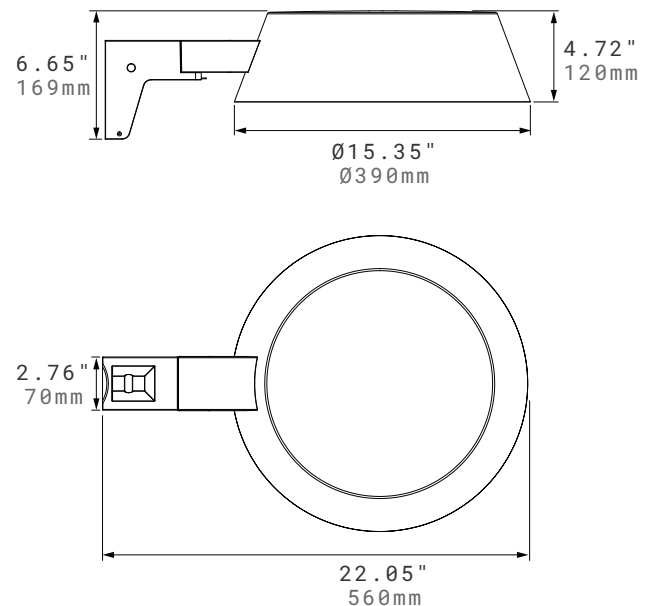


DIMENSION

Arm Mount B (ARB1)

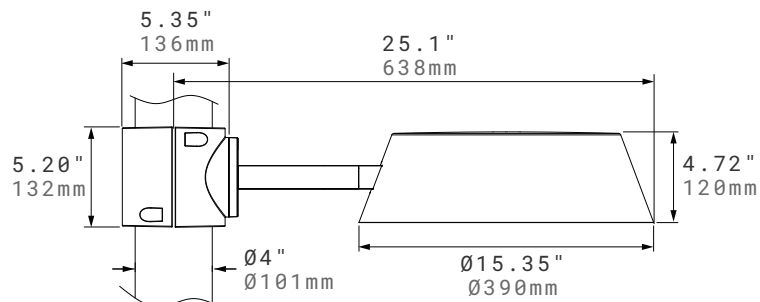

Arm Mount B (ARB2)

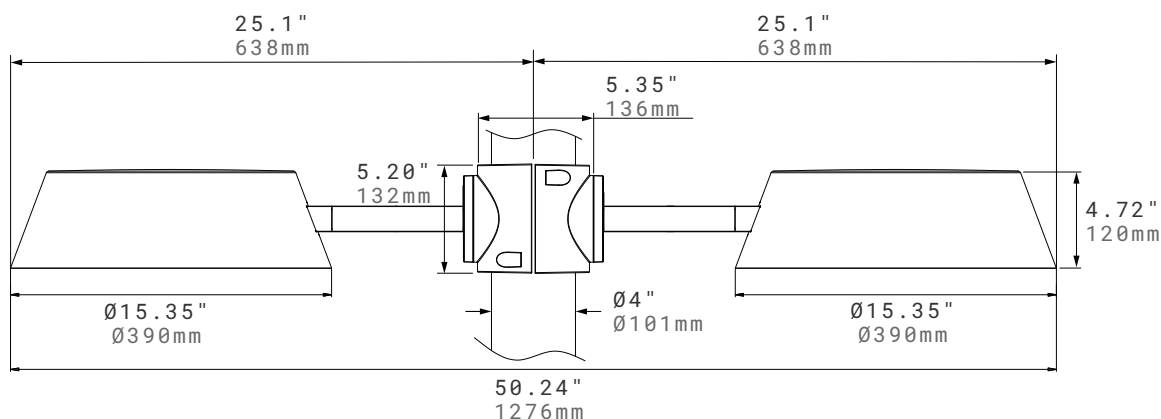

BUG RATING TABLE

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model #	BUG Rating	Model #	BUG Rating
UMBRA-30308-II-BK	B1-U0-G1	UMBRA-70308-II-BK	B2-U0-G1
UMBRA-30308-III-BK	B1-U0-G1	UMBRA-70308-III-BK	B2-U0-G2
UMBRA-30308-IV-BK	B1-U0-G1	UMBRA-70308-IV-BK	B2-U0-G2
UMBRA-30308-V-BK	B2-U0-G1	UMBRA-70308-V-BK	B3-U0-G1
UMBRA-50308-II-BK	B2-U0-G1	UMBRA-90308-II-BK	B3-U0-G1
UMBRA-50308-III-BK	B1-U0-G1	UMBRA-90308-III-BK	B2-U0-G2
UMBRA-50308-IV-BK	B2-U0-G1	UMBRA-90308-IV-BK	B2-U0-G2
UMBRA-50308-V-BK	B3-U0-G1	UMBRA-90308-V-BK	B3-U0-G2

ORDERING INFORMATION


EXAMPLE: UMBRA-30308-WMA-V-BK

UMBRA								
Series	Wattage	CCT	Voltage	CRI	Control	Installation	Distribution	Finish Color
UMBRA	30 30W	27 2700K	8 120-347V	BLANK 80CRI	BLANK 0-10V Dimming	WMA ¹ Wall Mount	II Type II	BK ⁶ Black RAL9005
	50 50W	30 3000K			PC Photocontrol	WMB Wall Mount	III Type III	
	70 70W	35 3500K			7P 7-Pin Receptacle	ARA ² Arm Mount A	IV Type IV	
	90 90W	40 4000K				ARB1 ³ Arm Mount B	V Type V	
		AB Amber 585nm to 597nm				ARB2 ⁴ Arm Mount B		
						SF ⁵ Slip Fitter Mount		

NOTES:


1. Wall Mount A includes a waterproof mounting box with ½" conduit inlets.
2. The ARA adapter suits round poles ≥4" (101mm) OD or square poles ≥3"×3" (76×76mm).
3. The ARB1 adapter supports 1 fixture on a 4" (101mm) OD pole.
4. The ARB2 adapter supports 2 fixtures on a 4" (101mm) OD pole.
5. The SF adapter fits Ø2-3/8" (Ø60mm) round poles.
6. Black is the standard finish. Custom colors are available at an additional charge.

INSTALLATION

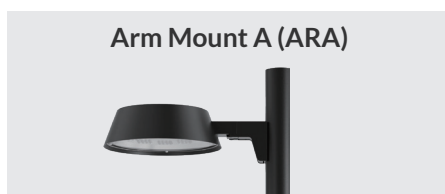


DRILL PATTERN

For Arm Mount A

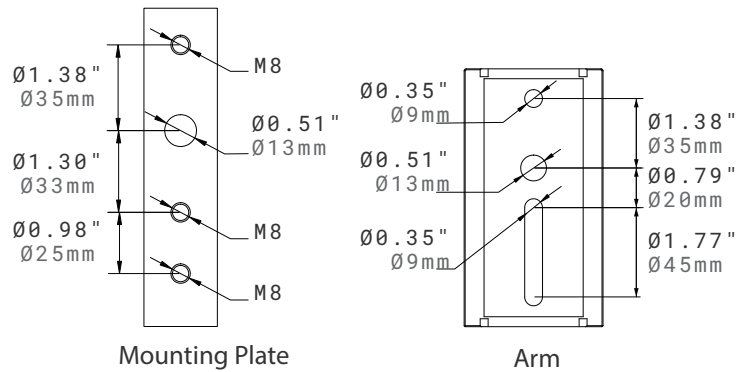

For Arm Mount B

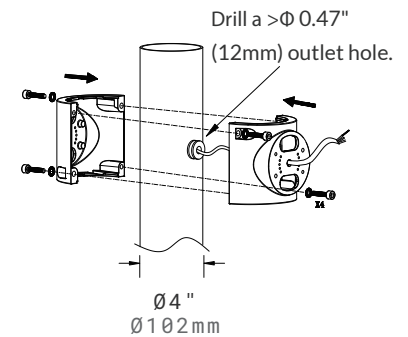

PERFORMANCE DATA


Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

WATTAGE	CCT	DISTRIBUTION	LUMENS (lm)	CRI	LPW
30W	3000K	Type II	4579 lm	80	141 lm/W
30W	3000K	Type III	4472 lm	80	138 lm/W
30W	3000K	Type IV	4522 lm	80	139 lm/W
30W	3000K	Type V	4507 lm	80	139 lm/W
50W	3000K	Type II	6979 lm	80	136 lm/W
50W	3000K	Type III	6879 lm	80	133 lm/W
50W	3000K	Type IV	6922 lm	80	134 lm/W
50W	3000K	Type V	6904 lm	80	134 lm/W
70W	3000K	Type II	9028 lm	80	129 lm/W
70W	3000K	Type III	8830 lm	80	126 lm/W
70W	3000K	Type IV	8852 lm	80	127 lm/W
70W	3000K	Type V	8891 lm	80	127 lm/W
90W	3000K	Type II	11233 lm	80	119 lm/W
90W	3000K	Type III	10995 lm	80	116 lm/W
90W	3000K	Type IV	11090 lm	80	117 lm/W
90W	3000K	Type V	11137 lm	80	118 lm/W

PHOTOMETRY


All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

30W, Type II




UNIT: cd
 — C0/180, 154.5
 — C30/210, 123.5
 — C60/240, 98.6
 — C90/270, 91.0

30W, Type III




UNIT: cd
 — C0/180, 145.3
 — C30/210, 83.2
 — C60/240, 64.0
 — C90/270, 60.9

30W, Type IV




UNIT: cd
 — C0/180, 152.8
 — C30/210, 145.5
 — C60/240, 121.8
 — C90/270, 111.5

30W, Type V




UNIT: cd
 — C0/180, 151.0
 — C30/210, 153.5
 — C60/240, 153.6
 — C90/270, 150.9

50W, Type II




UNIT: cd
 — C0/180, 154.5
 — C30/210, 123.7
 — C60/240, 98.6
 — C90/270, 91.9

50W, Type III




UNIT: cd
 — C0/180, 145.2
 — C30/210, 83.3
 — C60/240, 63.9
 — C90/270, 60.8

50W, Type IV




UNIT: cd
 — C0/180, 152.8
 — C30/210, 145.4
 — C60/240, 121.6
 — C90/270, 111.4

50W, Type V




UNIT: cd
 — C0/180, 151.0
 — C30/210, 153.5
 — C60/240, 153.7
 — C90/270, 150.9

70W, Type II




UNIT: cd
 — C0/180, 154.4
 — C30/210, 123.6
 — C60/240, 98.6
 — C90/270, 90.9

70W, Type III




UNIT: cd
 — C0/180, 145.2
 — C30/210, 83.3
 — C60/240, 63.8
 — C90/270, 60.7

70W, Type IV



UNIT: cd
 — C0/180, 152.7
 — C30/210, 145.3
 — C60/240, 121.6
 — C90/270, 111.4

70W, Type V




UNIT: cd
 — C0/180, 151.0
 — C30/210, 153.5
 — C60/240, 153.7
 — C90/270, 150.9

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.


90W, Type II



UNIT: cd

- C0/180, 154.4
- C30/210, 124.4
- C60/240, 98.9
- C90/270, 90.8


90W, Type III



UNIT: cd

- C0/180, 145.2
- C30/210, 83.3
- C60/240, 63.7
- C90/270, 60.7


90W, Type IV



UNIT: cd

- C0/180, 152.7
- C30/210, 145.3
- C60/240, 121.5
- C90/270, 111.3

90W, Type V



UNIT: cd

- C0/180, 150.9
- C30/210, 153.4
- C60/240, 153.6
- C90/270, 150.8

EFFECTIVE PROJECTED AREA (EPA)

Installation	Image	Effective Projected Area EPA (ft²)
Slip Fitter(SF)		2.71
Wall Mount A (WMA)		2.54
Wall Mount B (WMB)		2.6
Arm Mount A (ARA)		2.77
Arm Mount B (ARB1)		2.97
Arm Mount B (ARB2)		5.64

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.