


MULTIPLE VICKY SQUARE LIGHT

Downward

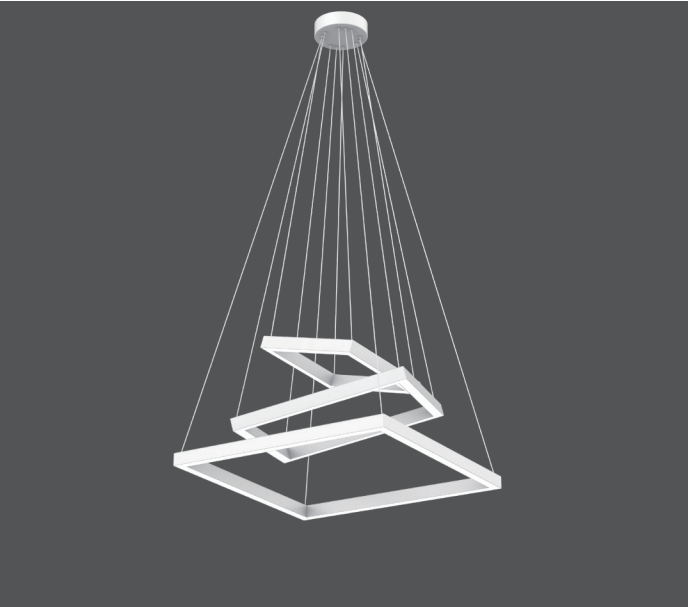

FEATURES

- Free combinations of 2'x2', 3'x3' or 4'x4' square fixtures.
- Illuminating downward from its square housing.



The Vicky Multiple Downward Square Light is a square style light with an LED light source illuminating downward. Aluminum body construction combined with two or three square fixtures with sizes of 2'X2', 3'X3' or 4'X4'. A versatile architectural lighting solution, available as pendant and surface mount.

TECHNICAL DATA

Wattage	40W, 60W, 80W
CCT	3000K, 3500K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Size	Lumen	AC Input 120V	CCT	CRI	LPW
40W	2'x2'	4200lm	0.33A	4000K	90	105
60W	3'x3'	6300lm	0.50A	4000K	90	105
80W	4'x4'	8400lm	0.67A	4000K	90	105

MULTIPLE VICKY SQUARE LIGHT

Downward

ORDERING INFORMATION

EXAMPLE: VKSD-22+33+44-40901-ACPMK-WH

Ref#: 20260714


VKS								
1. Series	2. Light Emitting	3. Square Configuration	5. CCT	6. CRI	7. Voltage	8. Installation	9. Control	10. Frame Finish
VKS Vicky Square	D Downward Light	22+33 2'X2'+3'X3' 22+44 2'X2'+4'X4' 33+44 3'X3'+4'X4' 22+33+44 2'X2'+3'X3'+4'X4'	30 3000K 35 3500K 40 4000K 50 5000K	90 90Ra	1 120V-277V	ACPMK Central Canopy Aircraft Cable Suspended	BLANK 0-10V Dimming	WH White BK Black *Custom colors are available at an additional charge.

DIMENSION

Standard Cable and wire cord length: 59" (1.5m)

*Please contact Customer Service for special cable and wire cord length.

Model	DIMENSION		
	W	L	H
2'x2'	23.6"(600mm)	23.6"(600mm)	1.38"(35mm)
3'x3'	35.4"(900mm)	35.4"(900mm)	1.38"(35mm)
4'x4'	47.2"(1200mm)	47.2"(1200mm)	1.38"(35mm)

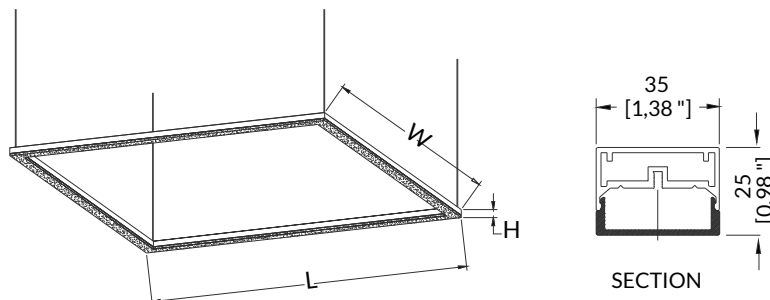

WARRANTY

Five year limited warranty.

Specifications subject to change without notice.