

VKSI VICKY SQUARE LIGHT

Inward, Acoustic Light




The Vicky Inward Square Light is a square style light with an LED light source illuminating inward with sizes of 2'X2', 3'X3' or 4'X4'. This design features aluminum body construction and an optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

TECHNICAL DATA

Wattage	40W, 60W, 80W
CCT	3000K, 3500K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598 Cert. to CSA Std. C22.2 No.250.0 RoHS compliant Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

VICKY SQUARE FAMILY

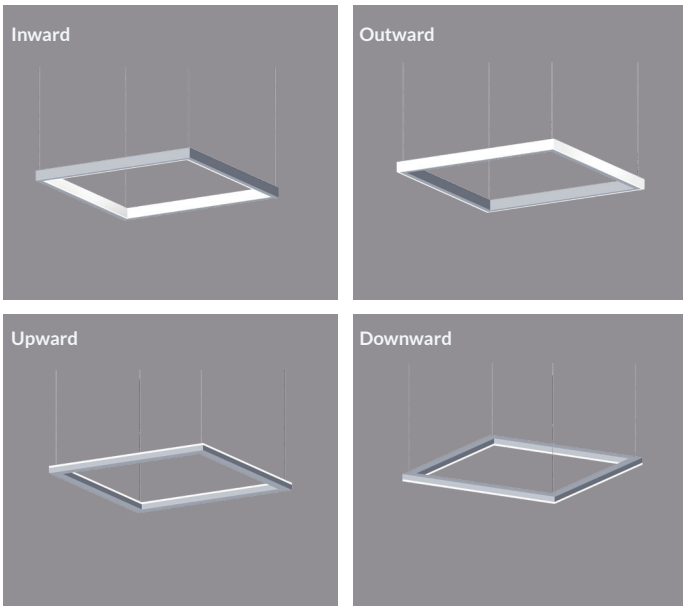

FEATURES

- Free combinations of 2'x2', 3'x3' or 4'x4' square fixtures.
- Illuminating inward from its square housing.
- Pendant and surface mounting.
- Available in standard light and acoustic w/light.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Size	Lumen	AC Input 120V	CCT	CRI	LPW
40W	2'x2'	4200lm	0.33A	4000K	90	105
60W	3'x3'	6300lm	0.50A	4000K	90	105
80W	4'x4'	8400lm	0.67A	4000K	90	105

ORDERING INFORMATION

EXAMPLE: VKSI-8044-40901-DPMK-WH-NSAC-021 130

VKS						
1. Series	2. Light Emitting	3. Wattage/ Dimension	4. CCT	5. CRI	6. Voltage	7. Installation
VKS Vicky Square	I Inward Light	4022 40W/2'X2' 6033 60W/3'X3' 8044 80W/4'X4'	30 3000K 35 3500K 40 4000K	90 90Ra	1 120V-277V	DPMK Direct Aircraft Cable Suspended SMK Surface Mount <i>*Acoustic color is not available for surface mount.</i>
8. Control	9. Frame Finish	10. Acoustic Finish				
BLANK 0-10V Dimming	WH White <i>*White finish is standard. Custom finish colors are available at an additional charge.</i>	BLANK No Acoustic Acoustic Color Code <i>*Acoustic color is only for Direct Aircraft Cable Suspended. Specify from the following table.</i>				

Acoustic Colors

								
NSAC-021 130	NSAC-042 146	NSAC-028 110	NSAC-002 122	NSAC-033 103	NSAC-013 111	NSAC-018 125	NSAC-004 123	NSAC-016 104
								
NSAC-035 101	NSAC-005 107	NSAC-006 106	NSAC-007 145	NSAC-008 129	NSAC-025 138	NSAC-038 127	NSAC-039 143	NSAC-009 140
								
NSAC-014 144	NSAC-011 135	NSAC-017 147	NSAC-022 119	NSAC-031 108	NSAC-020 128	NSAC-019 126	NSAC-001 141	NSAC-003 120
								
NSAC-040 124	NSAC-036 105	NSAC-024 117	NSAC-043 115	NSAC-034 102	NSAC-012 133			


**There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.*

DIMENSION

Standard Cable and wire cord length: 59" (1.5m)

*Please contact Customer Service for special cable and wire cord length.


Model	DIMENSION		
	W	L	H
2'x2'	23.6"(600mm)	23.6"(600mm)	1.38"(35mm)
3'x3'	35.4"(900mm)	35.4"(900mm)	1.38"(35mm)
4'x4'	47.2"(1200mm)	47.2"(1200mm)	1.38"(35mm)

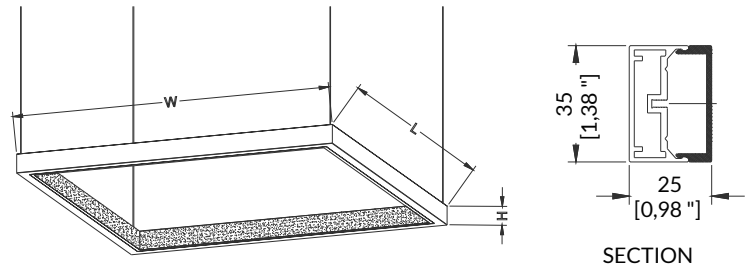

Ref#: 20260730

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

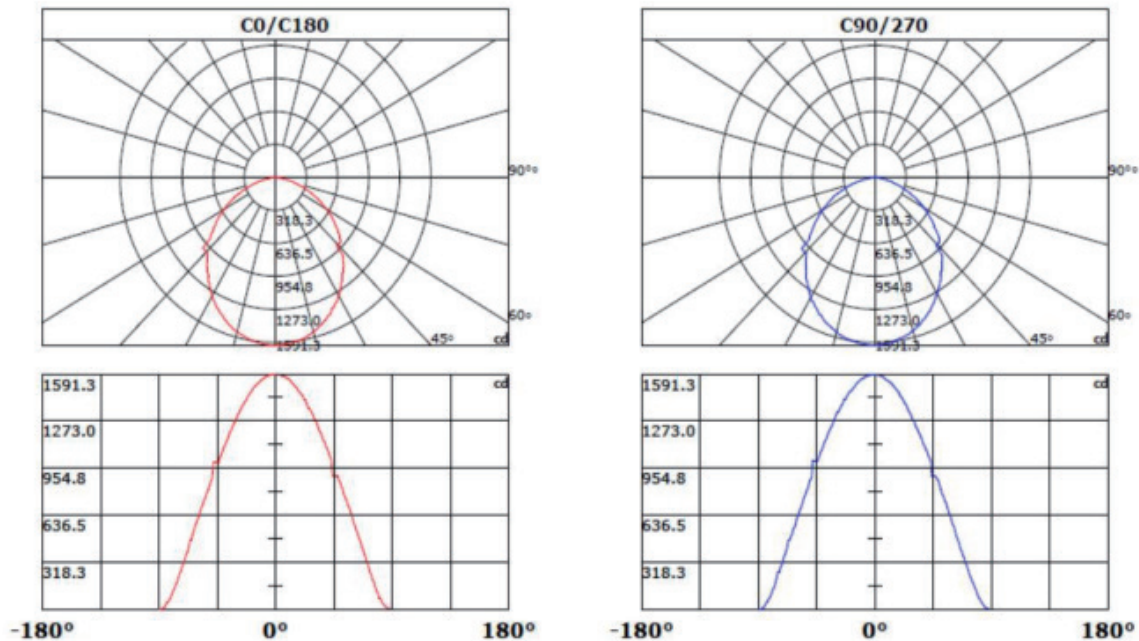

WARRANTY

Five year limited warranty.

Specifications subject to change without notice.