



The ADJ LED Post Top features in adjustable and indirect design. Light is reflected by the top reflector creating soft and uniform light with superior glare management. Die-cast Aluminum housing. Tempered clear glass. Reflector system made of aluminium sheet. White powder coating reflector for high reflection. Confidently suited for outdoor lighting applications such as landscape, courtyards, roadways.

TECHNICAL DATA

Wattage	30W
CRI	80
CCT	3000K, 4000K, 5000K
Input Voltage	120-277VAC, 50/60Hz
Operating Temp.	-40°F to 104°F (-40°C to 40°C)
Driver	0-10V dimming
Certifications	cETL Listed RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65
Surge Protection	Integral 10KA

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Nominal Wattage	Lumen Output	CCT	CRI	LPW
30W	2300lm	4000K	80	77

FEATURES

- **Housing Construction:** Die-cast aluminum housing with tempered clear glass.
- **Reflector System:** Aluminum reflector with white powder coating for high reflectivity.

ORDERING INFORMATION

EXAMPLE: APT30401-BK

APT							
Series	Wattage	CCT	Voltage	Control	Installation	Distribution	Finish
APT	30 30W	30 3000K 40 4000K 50 5000K	1 120-277V	BLANK 0-10V dimming	BLANK 3" Tenon Pole	BLANK Adjustable	BK Black ¹ RAL#9005 BZ Bronze ¹ RAL#8019

NOTE:


1. Standard Finish is Black or Bronze. Custom colors may be available for an additional fee. Please contact Customer Service for more information.

ACCESSORIES (ORDERED SEPARATELY)



ABMK-M16-7.8

Galvanized Anchor bolts mounting kits for round pole up to 18FT.
 Mounting hole 7.8"x7.8", M16x19.7" (500mm)



ALRP3-16FT-0.118-B11-BK


Aluminum Ø3" Round Pole , 16ft, Wall thickness: 0.118"
 Base size: 11"x11", without pole

* The height is for pole only not including the top luminaire.


* Pole height and finish color can be customized.

DIMENSION


Luminaire

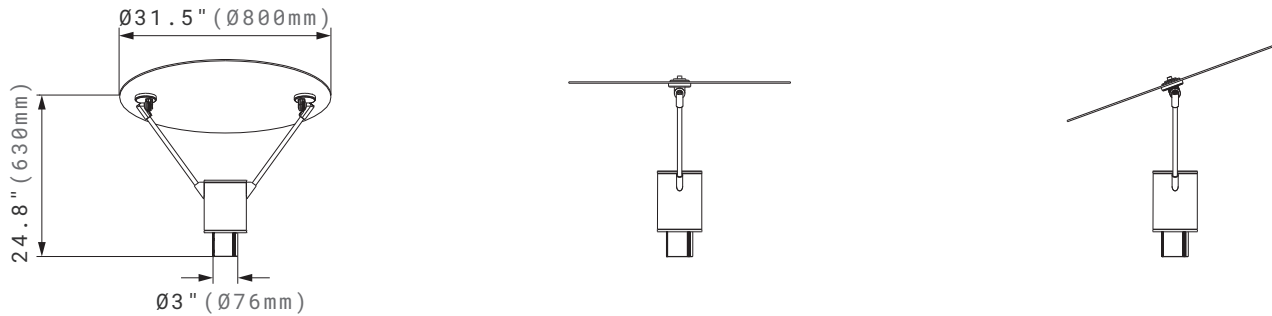

Pole

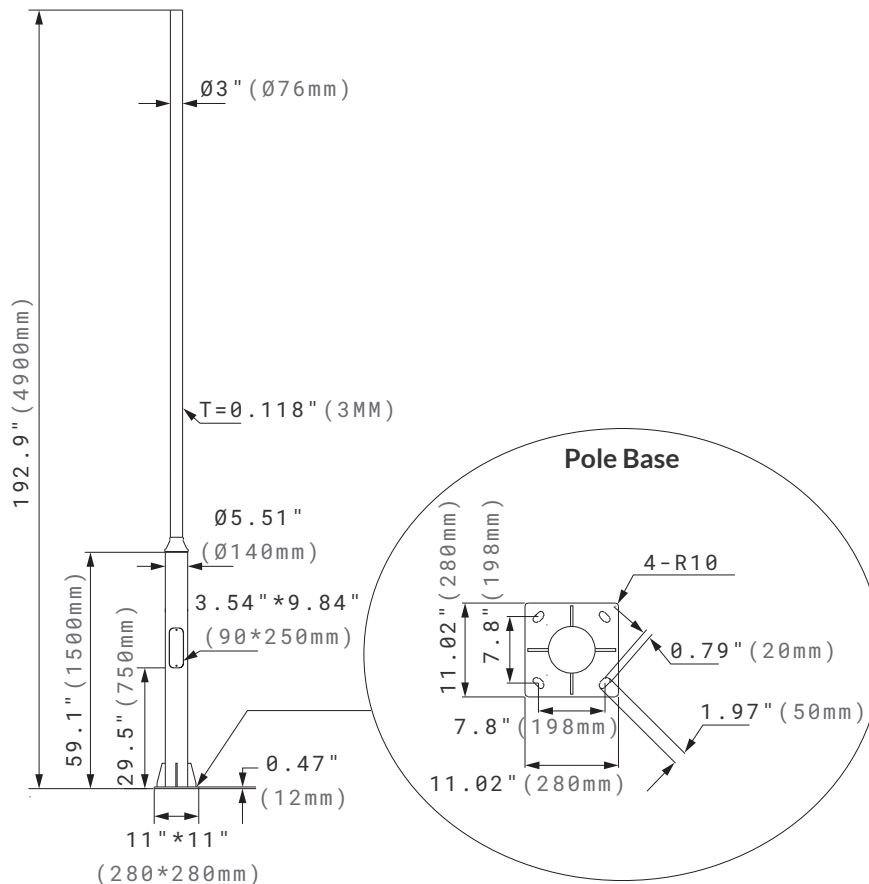


Anchor Bolt Detail

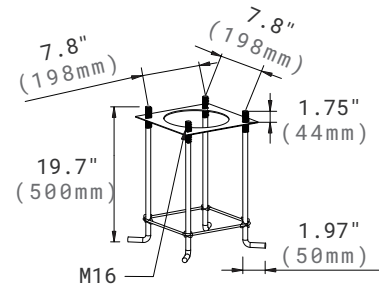

Anchor Bolt Plate


Use caution when setting anchor bolts. Bolts must be vertically straight and centered on dimensions shown.

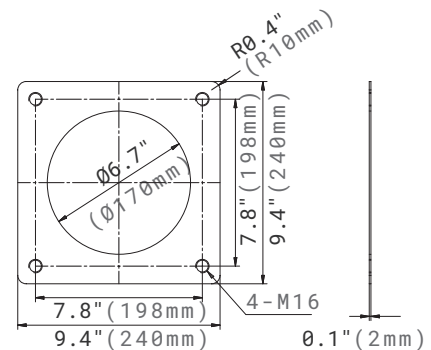

Note: Adequate drainage must be provided in concrete foundation.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

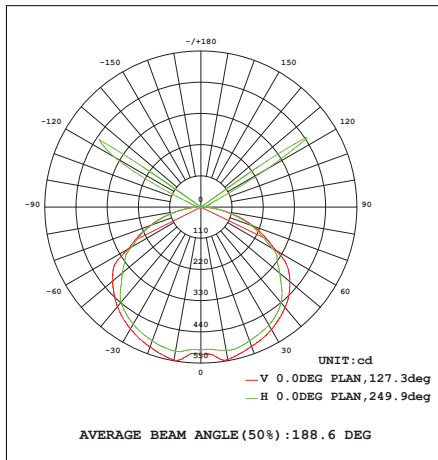

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.

Ref#: 20261015