OFM LED FLUSH MOUNT LIGHT

ABOVE ALL
www.AboveAllLighting.com



The OFM Outdoor Flush Mount Light comes in round shapes. Body and bracket in die-cast aluminum. Powder coated with pretreatment plus silicon rubber gasket for outdoor use. Simple and elegant appearance is ideal for general illumination for residential and commercial applications such as porches, covered walkways and store entrances.

FEATURES

- Die-cast aluminum body and polycarbonate lens.
- Driverless design.
- Ceiling and wall surface mounted.
- Suitable for wet locations.

TECHNICAL DATA

Wattage	18W
CCT	3000K
Dimming	Non-Dimming
CRI	80
Input Voltage	120V, 50Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
IP Rating	IP54 suitbale for wet locations

PERFORMANCE DATA

Watt.	Lumen Output	Shape	AC Input 120V	CCT	CRI
18W	900lm	Round	0.15A	3000K	80

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ORDERING INFORMATION

EXAMPLE: OFMR18304-WH

OFMR Series	Shape	Wattage	CCT	Voltage	Control	Finish
OFMR	**R** Round	**18** 18W/900lm	**30** 3000K	**4** 120V	**BLANK** On/Off	**WH** White RAL9003 standard *The following colors are available at an additional charge.*[1] **BK** Black RAL7021 **SL** Sliver 422C **GR** Graphite RAL7024 **RU** Rusty (See Notes)

NOTE:

1. White finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

Standard Color

White
(RAL9003)

Optional Colors

Black
(RAL7021)

Silver
(422C)

Graphite
(RAL7024)


Rusty

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

Ref#: 20261026

SPECIFICATION

Dimension

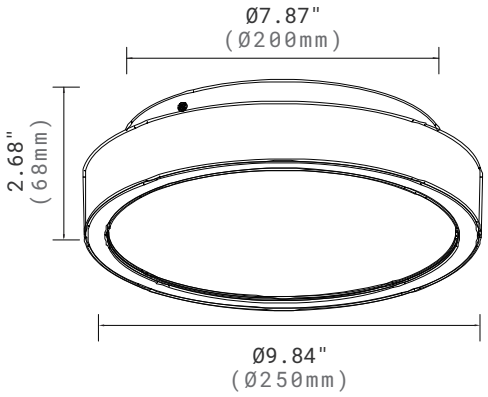


PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Result may vary per actual order.

Plane	[50%Ang.]	[10%Ang.]
c180.0:	105.1	157.8
c0.0:	105.1	157.8
c90.0:	105.5	158.1

Polar Graph

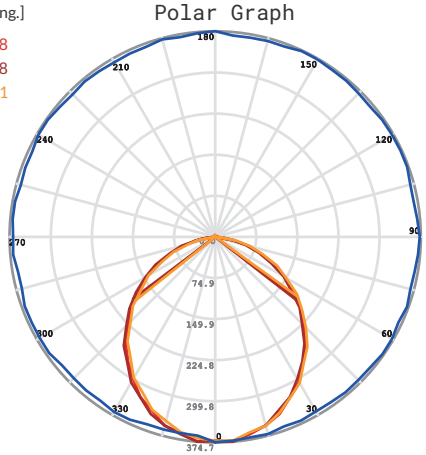

C Plane. C180.0 C0.0_180.0 C90.0_270.0
Y Cone. Y5.0

WARRANTY

3 year limited warranty.

Specifications subject to change without notice.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.