
PURE LIGHT
Rectangle


ABOVE ALL
www.AboveAllLighting.com



Family Product

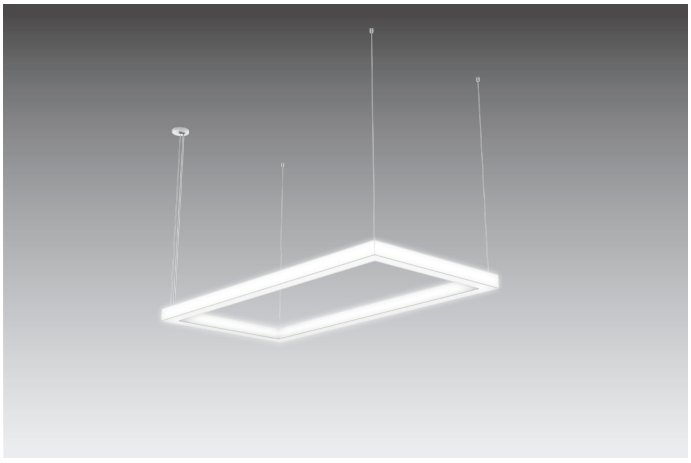

Acoustic Option

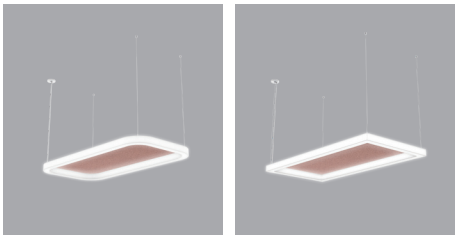

Please see the Acoustic Option table for more acoustic colors.

FEATURES

- **Unique Light Distribution:** Provides three-sided illumination for uniform lighting.
- **Robust Construction:** Features PMMA lens and efficient thermal design for durability.

The Pure Rectangle Light is a distinctive LED light featuring three-sided illumination. Constructed with PMMA for excellent optical performance and heat dissipation, it offers high quality, uniform lighting with excellent efficacy.

TECHNICAL DATA

Wattage	40W, 80W, 160W, 320W
CRI	90
Driver	0-10V dimming
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-50,000 hours
Operating Temperature	-4°F to 104°F (-20°C to 40°C)
Certifications	ETL Listed
	RoHS Compliant
Power Factor	>0.9
Harmonic Distortion	<20%

Color Temperature

2700K 3000K 3500K 4000K RGBW

**RGBW models are made to order. Please contact the Customer Service for further information.*

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Size	CCT	Lumens	Efficacy
40W	23.6"x23.6"	3000K	4200 lm	105 lm/W
80W	23.6"x47.2"	3000K	8400 lm	105 lm/W
160W	47.2"x47.2"	3000K	16800 lm	105 lm/W
320W	47.2"x94.5"	3000K	33600 lm	105 lm/W

NOTE:

1. Listed lumen outputs are nominal. For precise photometric data, refer to the IES files.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ORDERING INFORMATION

EXAMPLE: PURT-R-2424-40-30901-DPMK

PURT								
Series	**Shape**	**Size-Watt**	**CCT**[5]	**CRI**	**Voltage**	**Control**	**Mounting**	**Acoustic Option**
PURT Pure Rectangle	**R**[4] Round corner **S** Straight corner	**2424-40** 23.6"x23.6" 40W/4200lm **2447-80** 23.6"x47.2" 80W/8400lm	**27** 2700K **30** 3000K **35** 3500K **40** 4000K	**90** CRI90	**1** 120-277V	**BLANK** 0-10V Dimming	**DPMK**[1&2] Direct Aircraft Cable Suspended	**BLANK** No Acoustic **NSAC -### ###**[4&5] *Please specify the acoustic color code from the following table.*
		4747-160 47.2"x47.2" 160W/16800lm **4795-320** 47.2"x94.5" 320W/33600lm **9595-160**[3] 94.5"x94.5" 160W/16800lm **95189-320**[3] 94.5"x189" 320W/33600lm	**27** 2700K **30** 3000K **35** 3500K **40** 4000K	**90** CRI90	**1** 120-277V	**BLANK** 0-10V Dimming	**DPMK**[1&2] Direct Aircraft Cable Suspended	**BLANK** No Acoustic

NOTE:

1. The standard cable length for suspended mount is 4.9ft (1.5m). Custom cable lengths available upon request. Setup fees may apply. Please contact the Customer Service for details.
2. DPMK is the standard mounting. Please contact Customer Service for special requirements.
3. The 9595-160 & 95189-320 models are made to order, extended lead time may apply. Please contact the Customer Service for further information.
4. Round corner radius R=11.8 inch (300mm) for 4747-160 & 4795-320 model, R=5.9 inch (150mm) for 2424-40 & 2447-80 model.
5. RGBW option available. Please contact the Customer Service for further information.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ACOUSTIC OPTION

NSAC-021 130 NSAC-042 146 NSAC-028 110 NSAC-002 122 NSAC-033 103 NSAC-013 111 NSAC-018 125 NSAC-004 123 NSAC-016 104

NSAC-035 101 NSAC-005 107 NSAC-006 106 NSAC-007 145 NSAC-008 129 NSAC-025 138 NSAC-038 127 NSAC-039 143 NSAC-009 140

NSAC-014 144 NSAC-011 135 NSAC-017 147 NSAC-022 119 NSAC-031 108 NSAC-020 128 NSAC-019 126 NSAC-001 141 NSAC-003 120


NSAC-040 124 NSAC-036 105 NSAC-024 117 NSAC-043 115 NSAC-034 102 NSAC-012 133


NOTE:

1. Acoustic is not available for 100W, 120W, 160W, 200W, 240W, 300W and 400W.
2. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects.
3. Setup fees applied. Please contact the Customer Service for more information.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

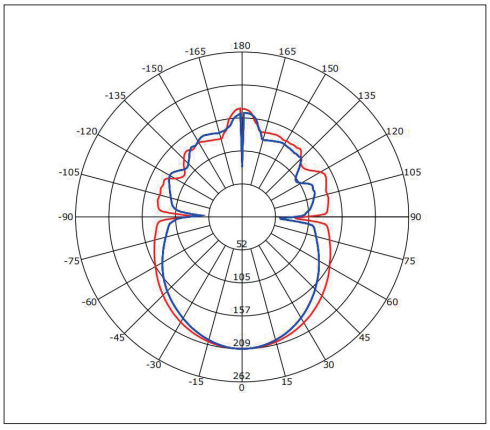


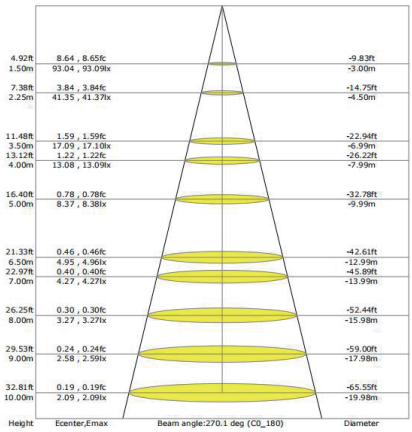


©2026 ABOVE ALL Lighting, Inc. All rights reserved.

SPECIFICATION


Profile



Round Corner

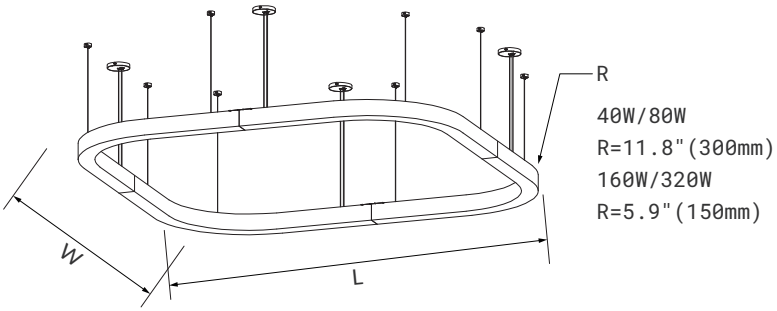

Straight Corner

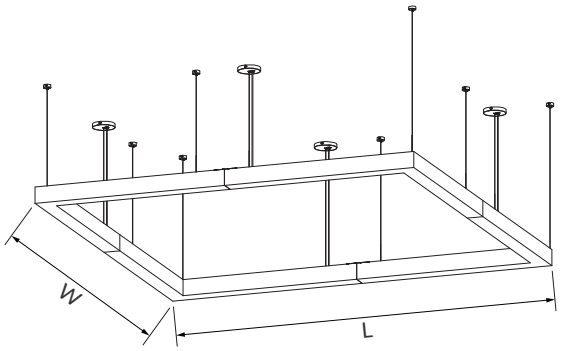

Suspension Cable Length: 4.9ft (1.5m)

NOTE:

1. Custom cable lengths available upon request. Setup fees may apply. Please contact the Customer Service for details.

Model	Wattage	W	L	H	Driver Qty.	Section Qty.
DPMK	40W	23.6"(600mm)	23.6"(600mm)	4.0"(100mm)	1	1
DPMK	80W	23.6"(600mm)	47.2"(1200mm)	4.0"(100mm)	2	1
DPMK	160W	47.2"(1200mm)	47.2"(1200mm)	4.0"(100mm)	4	1
DPMK	320W	47.2"(1200mm)	94.5"(2400mm)	4.0"(100mm)	8	1

WARRANTY

5 years limited warranty.
Specifications subject to change without notice.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.