




PURE LIGHT
Ring

ABOVE ALL
www.AboveAllLighting.com



Family Product



Acoustic Option



Please see the Acoustic Option table for more acoustic colors.

FEATURES

- **Unique Light Distribution:** Provides three-sided illumination for uniform lighting.
- **Adjustable & Customizable:** Available in 10 standard sizes (2ft to 16ft diameter, 40W to 400W) and customizable upon request for versatile project adaptability.
- **Robust Construction:** Features efficient thermal design for durability.

Intertek

The Pure Ring is a distinctive LED light featuring three-sided illumination. Constructed for optimal optical performance and heat dissipation, it offers high quality, uniform lighting with excellent efficacy.

TECHNICAL DATA

Wattage	40W, 50W, 80W, 100W, 120W
	160W, 200W, 240W, 300W, 400W
CRI	90
SDCM	<6
Driver	0-10V dimming
Input Voltage	AC120-277V
Projected Lifetime	L70-50,000h
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	ETL Listed
	RoHS Compliant
Power Factor	>0.9
Harmonic Distortion	<20%

Color Temperature

2700K 3000K 3500K 4000K RGBW

**RGBW models are made to order. Please contact the Customer Service for further information.*

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Dia.	CCT	Lumen Output	Efficacy
40W	23.6"	3000K	4655 lm	109 lm/W
50W	35.4"	3000K	5353 lm	103 lm/W
80W	47.2"	3000K	8612 lm	104 lm/W
100W	59.0"	3000K	10707 lm	104 lm/W
120W	70.9"	3000K	12569 lm	102 lm/W
160W	94.5"	3000K	16759 lm	102 lm/W
200W	118.1"	3000K	20948 lm	104 lm/W
240W	141.7"	3000K	25604 lm	104 lm/W
300W	165.4"	3000K	30259 lm	100 lm/W
400W	189.0"	3000K	41431 lm	103 lm/W

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ORDERING INFORMATION

EXAMPLE: PUR-24-40-30901-ACPMK

PUR							
Series	**Diameter - Wattage**	**CCT[7]**	**CRI**	**Voltage**	**Control**	**Mounting**	**Acoustic Option**
PUR Pure Ring	**24-40** Ø23.6"-40W/4655lm **35-50** Ø35.4"-50W/5353lm **47-80** Ø47.2"-80W/8612lm **59-100** Ø59.0"-100W/10707lm	**27** 2700K **30** 3000K **35** 3500K **40** 4000K	**90** CRI90	**1** 120-277V	**BLANK** 0-10V Dimming	**ACPMK[1&2]** Central Canopy Aircraft Cable Suspended **SM[3]** Surface Mount	**BLANK** No Acoustic **NSAC -### ###[5&6]** *Please specify the acoustic color code from the following table.*
	71-120[3] Ø70.9"-120W/12569lm *The following models are not available for surface mount.* **95-160[4&5]** Ø94.5"-160W/16759lm **118-200[4&5]** Ø118.1"-200W/20948lm **142-240[4&5]** Ø141.7"-240W/25604lm **165-300[4&5]** Ø165.4"-300W/30259lm **189-400[4&5]** Ø189"-400W/41431lm	**27** 2700K **30** 3000K **35** 3500K **40** 4000K	**90** CRI90	**1** 120-277V	**BLANK** 0-10V Dimming	**DPMK[1&2]** Direct Aircraft Cable Suspended **SM[3]** Surface Mount	

NOTE:

1. The standard cable length for suspended mount is 4.9ft (1.5m). Custom cable lengths available upon request. Setup fees may apply for custom cable lengths. Please contact the Customer Service for details.
2. ACPMK is the standard mounting method for the 40W/50W/80W/100W models. DPMK is the standard mounting method for the 120W/160W/200W/300W/400W models. Please contact Customer Service for special requirements.
3. Surface mount is only available for 40W/50W/80W/100W/120W models.
4. 160W, 200W, 240W, 300W and 400W are shipped in sections and need to be installed in the field.
5. Acoustic option is not available for 100W, 120W, 160W, 200W, 240W, 300W and 400W.
6. Additional fees apply for the Acoustic option. Please contact the Customer Service for more information.
7. RGBW option available. Please contact the Customer Service for further information.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ACOUSTIC OPTION

NSAC-021 130 NSAC-042 146 NSAC-028 110 NSAC-002 122 NSAC-033 103 NSAC-013 111 NSAC-018 125 NSAC-004 123 NSAC-016 104

NSAC-035 101 NSAC-005 107 NSAC-006 106 NSAC-007 145 NSAC-008 129 NSAC-025 138 NSAC-038 127 NSAC-039 143 NSAC-009 140

NSAC-014 144 NSAC-011 135 NSAC-017 147 NSAC-022 119 NSAC-031 108 NSAC-020 128 NSAC-019 126 NSAC-001 141 NSAC-003 120


NSAC-040 124 NSAC-036 105 NSAC-024 117 NSAC-043 115 NSAC-034 102 NSAC-012 133

NOTE:

1. Acoustic is not available for 100W, 120W, 160W, 200W, 240W, 300W and 400W.
2. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects.
3. Setup fees applied. Please contact the Customer Service for more information.

PHOTOMETRY


All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

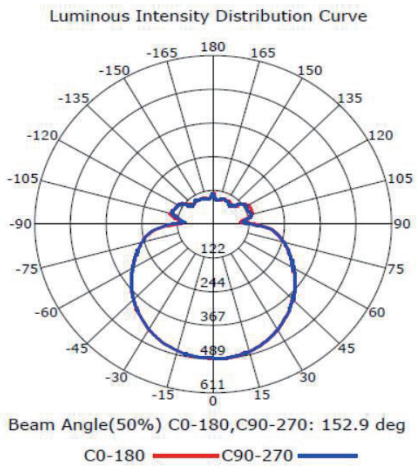


©2026 ABOVE ALL Lighting, Inc. All rights reserved.

SPECIFICATION


Profile




Direct Aircraft Cable Suspended

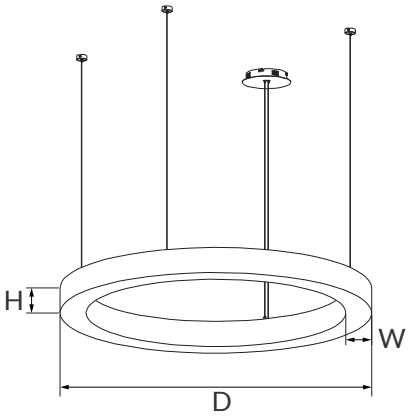

Central Canopy Aircraft Cable Suspended

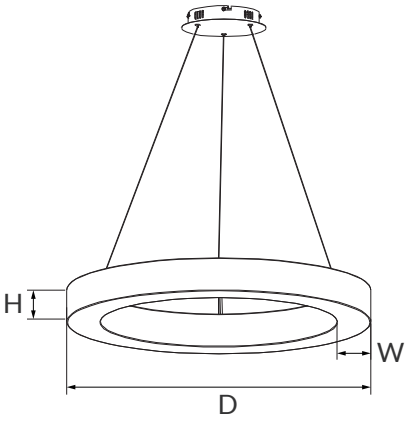

Surface Mount

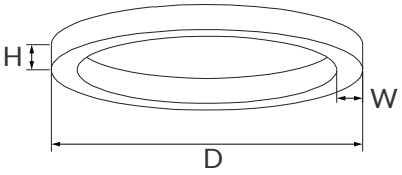

Suspension Cable Length: 4.9ft (1.5m)

NOTE:

1. Custom cable lengths available upon request. Setup fees may apply. Please contact the Customer Service for details.

Model	Wattage	D	W	H	Driver Qty.	Section Qty.
ACPMK/SM	40W	23.6"(600mm)	4.0"(100mm)	4.0"(100mm)	1	1
ACPMK/SM	50W	35.4"(900mm)	4.0"(100mm)	4.0"(100mm)	1	1
ACPMK/SM	80W	47.2"(1200mm)	4.0"(100mm)	4.0"(100mm)	2	1
ACPMK/SM	100W	59.0"(1500mm)	4.0"(100mm)	4.0"(100mm)	2	1
DPMK/SM	120W	70.9"(1800mm)	4.0"(100mm)	4.0"(100mm)	3	1
DPMK	160W	94.5"(2400mm)	4.0"(100mm)	4.0"(100mm)	4	4
DPMK	200W	118.1"(3000mm)	4.0"(100mm)	4.0"(100mm)	5	5
DPMK	240W	141.7"(3600mm)	4.0"(100mm)	4.0"(100mm)	5	5
DPMK	300W	165.4"(4200mm)	4.0"(100mm)	4.0"(100mm)	6	6
DPMK	400W	189.0"(4800mm)	4.0"(100mm)	4.0"(100mm)	12	6

©2026 ABOVE ALL Lighting, Inc. All rights reserved.