
VRD VICKY RING LIGHT
Downward, Acoustic Light Available

ABOVE ALL
www.AboveAllLighting.com

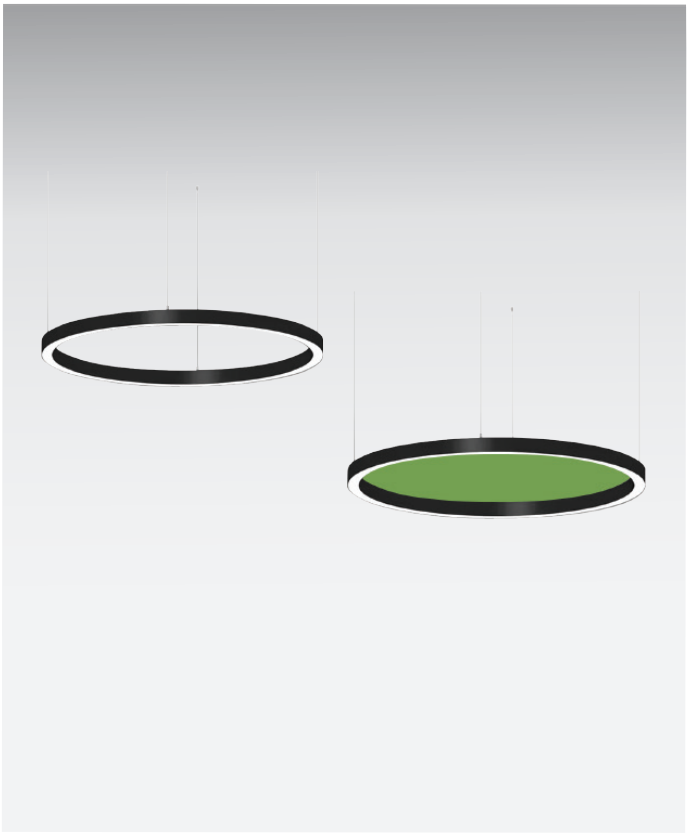

The Vicky Ring Light is a unique ring style light with an LED light source illuminating downward. It is available in sizes ranging from 23.6" (dia.) up to 196.9" (dia.). This design features aluminum body construction and an optional acoustic system that maximizes surface area to absorb sound waves and improve harmony in the installed space, providing a perfect integration of lighting and acoustic control.

PERFORMANCE DATA

Watt.	Lumen Output	AC Input 120V	LPW
40W	3400lm	0.33A	85
50W	4250lm	0.42A	85
80W	6800lm	0.67A	85
100W	8500lm	0.83A	85
120W	10200lm	1.00A	85
160W	13600lm	1.33A	85
200W	17000lm	1.67A	85
300W	25500lm	2.50A	85
400W	34000lm	3.33A	85

**For complete performance data, please refer to the detailed table on page 2.*

TECHNICAL DATA

Wattage	40W, 50W, 80W, 100W, 120W,
	160W, 200W, 300W, 400W
CCT	3000K, 3500K, 4000K, 5000K
Driver	0-10V Dimming standard
CRI	90
Input Voltage	120-277V, 50/60Hz
Projected Lifetime	L70-100,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cETLus conforms to UL Std. 1598
	Cert. to CSA Std. C22.2 No.250.0
	RoHS compliant
	Suitable for dry location
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES

- Fixtures in diameters from 23.6" through 196.9".
- Available in standard light and acoustic w/light.
- Direct illuminating.
- 30+ acoustic felt colors available.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.


Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
40W	3400lm	0.33A	4000K	90	85
50W	4250lm	0.42A	4000K	90	85
80W	6800lm	0.67A	4000K	90	85
100W	8500lm	0.83A	4000K	90	85
120W	10200lm	1.00A	4000K	90	85
160W	13600lm	1.33A	4000K	90	85
200W	17000lm	1.67A	4000K	90	85
300W	25500lm	2.50A	4000K	90	85
400W	34000lm	3.33A	4000K	90	85

NOTE:

1. The lumen output is for the fixture without acoustic. The data for acoustic may vary based on different acoustic fiber colors. Please contact Customer Service if need the lumen output for acoustic version.
2. Lumen outputs for 100W/120W/160W/200W/300W/400W are calculated.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

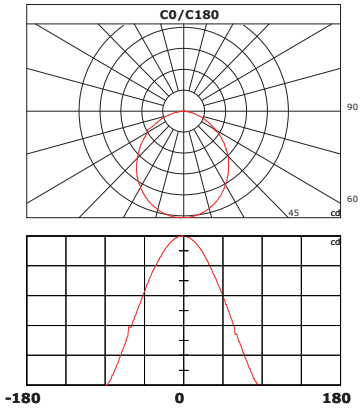

CIE Class: Direct

Measurement Flux: 6740.0lm

Efficiency: 86.22lm/W

Central Intensity: 2607.667cd

Max. Intensity: 2615.891cd

Field Angle(10%Imax): 155.94, 154.95

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

ORDERING INFORMATION

EXAMPLE: VRD-4024-40901-ACPMK-WH-NSAC-021 130

VR						
1. Series	**2. Light Emitting**	**3. Acoustic Configuration**	**4. Wattage/ Diameter**	**5. CCT**	**6. CRI**	**7. Voltage**
VR Vicky Ring	**D** Downward Light	**BLANK** Light without Acoustic **LA**[1] Light with Acoustic[1] *Specify color from the following list.*	**4024** 40W/Ø23.6" **5035** 50W/Ø35.4" **8047** 80W/Ø47.2" **10059**[2] 100W/Ø59.1" **12079**[2&3] 120W[2&3]/Ø78.8" **16098**[2&3] 160W[2&3]/Ø98.4" **200118**[2&3] 200W[2&3]/Ø118.1" **300158**[2&3] 300W[2&3]/Ø157.5" **400197**[2&3] 400W[2&3]/Ø196.9"	**30** 3000K **35** 3500K **40** 4000K **50** 5000K	**90** 90Ra	**1** 120V-277V

8. Installation	**9. Control**	**10. Frame Finish**		**11. Acoustic Finish**
ACPMK[4] Central Canopy Aircraft Cable Suspended[4] *for 24/35/47/59" only* **DPMK**[4] Direct Aircraft Cable Suspended[4] *for 79/98/118/158/197" only* **SMK**[4] Surface Mounted[4]	**BLANK** 0-10V Dimming	**WH**[5] White[5] **BK**[5] Black[5]	**Optional Finish Colors** *(Need Additional Charge)*[1]	**BLANK** No Acoustic **Acoustic Color Code**[6] *Specify from the following table*[6]

©2026 ABOVE ALL Lighting, Inc. All rights reserved.

NOTE:

1. If choose acoustic, please choose the acoustic color in the following list.
2. Acoustic is not available for 100W, 120W, 160W, 200W, 300W and 400W.
3. 120W, 160W, 200W, 300W and 400W are shipped in sections and need to be installed in the field.
4. Central canopy pendant is standard for 40W/50W/80W/100W. Direct suspended is standard for 120W/160W/200W/300W/400W. Please contact Customer Service for special requirements.
5. White and black finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.
6. There will be slight differences between the color of the acoustic image and the actual fabric because of computer display defects. The standard acoustic colors include: NSAC-021 130, NSAC-042 146, NSAC-028 110, NSAC-002 122, NSAC-033 103. Other acoustic colors might be available for an additional fee. Please check with Customer Service for more information.

Acoustic Colors[6]


NSAC-021 130


NSAC-042 146


NSAC-028 110


NSAC-002 122


NSAC-033 103


NSAC-013 111


NSAC-018 125


NSAC-004 123


NSAC-016 104


NSAC-035 101


NSAC-005 107


NSAC-006 106


NSAC-007 145


NSAC-008 129


NSAC-025 138


NSAC-038 127


NSAC-039 143


NSAC-009 140


NSAC-014 144


NSAC-011 135


NSAC-017 147


NSAC-022 119


NSAC-031 108


NSAC-020 128


NSAC-019 126


NSAC-001 141


NSAC-003 120


NSAC-040 124


NSAC-036 105


NSAC-024 117


NSAC-043 115


NSAC-034 102


NSAC-012 133


©2026 ABOVE ALL Lighting, Inc. All rights reserved.

Ref#: 4-20261111


SPECIFICATION

Dimension


Cable and wire cord length: 59" (1.5m)



Central Canopy Suspended



Direct Suspended



Section

Dimension		Driver Quantity	Section Quantity	Wattage
D	D1			
23.6"(600mm)	10.0"(250mm)	1	1	40W
35.4"(900mm)	10.0"(250mm)	1	1	50W
47.2"(1200mm)	10.0"(250mm)	2	1	80W
59.1"(1500mm)	10.0"(250mm)	2	1	100W
78.8"(2000mm)	14.0"(350mm)	3	3	120W
98.4"(2500mm)	14.0"(350mm)	4	4	160W
118.1"(3000mm)	18.0"(450mm)	5	5	200W
157.5"(4000mm)	20.0"(500mm)	6	6	300W
196.9"(5000mm)	20.0"(500mm)	12	6	400W

WARRANTY

5 year limited warranty.

Specifications subject to change without notice.

©2026 ABOVE ALL Lighting, Inc. All rights reserved.