

DARKSKY APPROVED
Reduces Light pollution
Certified by DarkSky.org

The Pillar Square LED Pole Light is well constructed with high quality extruded aluminum, UV powder coated, featuring tempered safety glass, moulded silicone gasket and stainless steel screws. This impressive pole light is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

TECHNICAL DATA

| | |
|----------------------------|--------------------------------|
| Wattage | 45W, 55W |
| CRI | 80-Standard |
| CCT | 2700K, 3000K, 4000K |
| Dimming | 0-10V Dimming is standard |
| Input Voltage | 120-277VAC, 50/60Hz |
| Operating Temp. | -40°F to 104°F (-40°C to 40°C) |
| Certifications | cETL Listed |
| | RoHS compliant |
| | DarkSky approved for CCT of |
| | 3000K and below |
| Power Factor | >0.9 at full load |
| Harmonic Distortion | <20% at full load |
| Projected Lifetime | L70 - 100,000 Hours |
| IP Rating | IP65 |


FEATURES

- Reliable Performance:** Delivers consistent output at either 45W or 55W with CRI 80 and available CCT of 2700K, 3000K, or 4000K.
- Optional Mounting Accessories:** Compatible with anchor bolt mounting kits (ABMK-PSPL) for 6-18ft pole configurations.


SPECIFICATION

Dimension

Pillar Square Pole Light

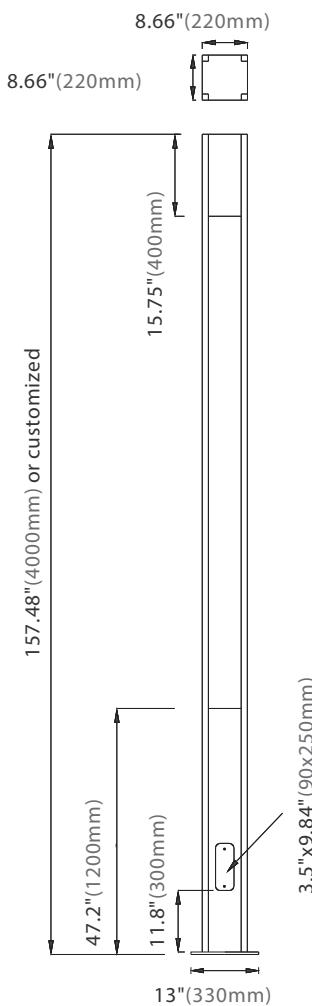


Base Plate

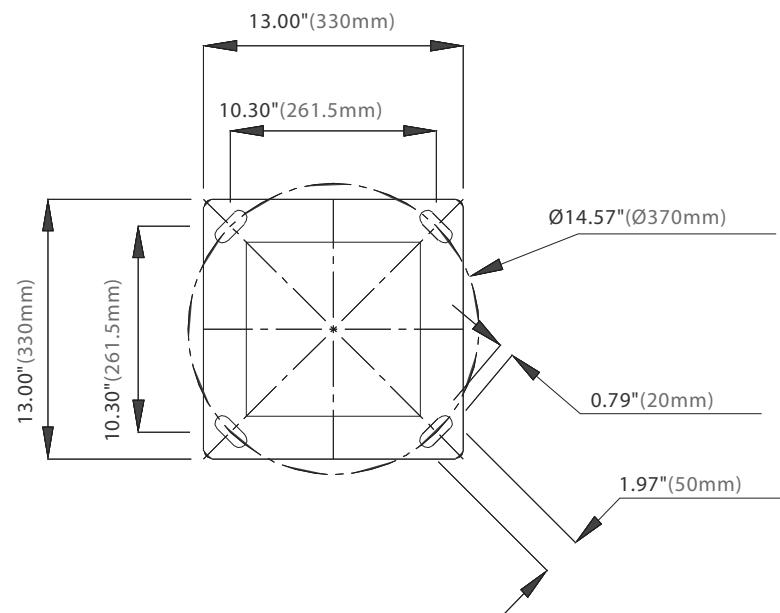


Anchor Bolts

ABMK-PSPL-6T13FT

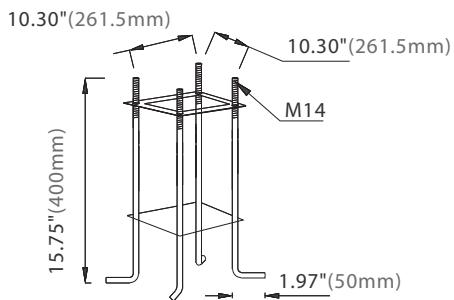

Anchor Bolts

ABMK-PSPL-15T18FT

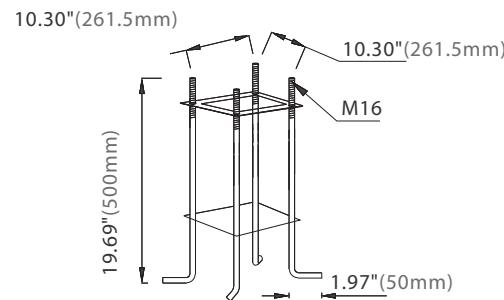

PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

| Nominal Wattage | Lumen Output | CCT | CRI |
|-----------------|--------------|-------|-----|
| 45W | 3300lm | 4000K | 80 |
| 55W | 4100lm | 4000K | 80 |

ORDERING INFORMATION

Standard Model

EXAMPLE: PSPL-6FT-4530801-BK

| PSPL | | | | | | | |
|--------|-----------------|-----------|-------------|-------------|---------------|---------------------------|-------------|
| Series | Total Height | Watts | CCT | CRI | Voltage | Control | Finish |
| PSPL | 6FT 6 feet | 45 45w | 27 2700K | 80 CRI80 | 1 120-277V | BLANK 0-10V Dimming | BK Black |
| | 13FT 13 feet | 55 55w | 30 3000K | | | | |
| | 15FT 15 feet | | 40 4000K | | | | |
| | 18FT 18 feet | | | | | | |

NOTE:

1. Height can be customized. Please check with Customer Service for more information.
2. Standard Finish is Black. Custom colors might be available at an additional fee. Please check with Customer Service for more information.

ORDERING INFORMATION

DarkSky-Approved Model

EXAMPLE: PSPL-6FT-4530801-BK

| PSPL | | | | | | | | |
|--------|------------------------|------------------|--------------------|--------------------|----------------------|----------------------------------|--------------------|--|
| Series | Total Height | Watts | CCT | CRI | Voltage | Control | Finish | |
| PSPL | 6FT 6 feet | 45 45w | 27 2700K | 80 CRI80 | 1 120-277V | BLANK 0-10V Dimming | BK Black | |
| | 13FT 13 feet | 55 55w | 30 3000K | | | | | |
| | 15FT 15 feet | | | | | | | |
| | 18FT 18 feet | | | | | | | |

NOTE:

1. Height can be customized. Please check with Customer Service for more information.
2. Standard Finish is Black. Custom colors might be available at an additional fee. Please check with Customer Service for more information.

ACCESSORIES (ORDER SEPARATELY)



ABMK-PSPL-6T13FT

Anchor bolts mounting kits.
for 6ft to 13ft Pillar Square Pole Light.

ABMK-PSPL-15T18FT

Anchor bolts mounting kits.
for 15ft to 18ft Pillar Square Pole Light.

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.