



SELECTABLE FM LED CEILING LIGHT



PRODUCT DESCRIPTION

The Selectable Flush Mount Ceiling fixtures offer white and brush nickel color with multiple size from 10 to 18 inches. Back light design and classic shaped lens give even illumination. 3000K, 4000K, 5000K selectable in one. It is deal for a variety of applications for any residential or commercial areas.


FEATURE

- Dual ring shape design
- CCT selectable (3000K, 4000K, 5000K in one)
- Triac dimming
- AC LED driverless technology

ELECTRICAL SYSTEM

- Input Voltage: 120V 50/60Hz
- Power Factor: > 0.9 at full load
- Total Harmonic Distortion: < 20% at full load

SPECIFICATION

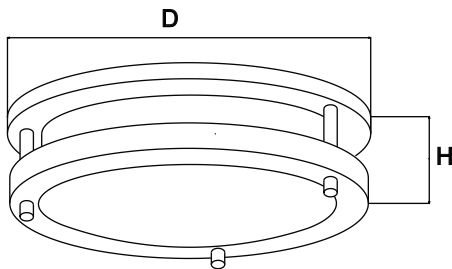

Model	D	H
FM10-10LMSW804	10-1/2"	3-1/2"
FM12-10LMSW804	11-7/8"	3"
FM14-16LMSW804	13-7/8"	3-1/4"
FM16-19LMSW804	15-7/8"	3-1/2"
FM18-22LMSW804	17-7/8"	4"

PERFORMANCE

CRI

80

CCT

3000K, 4000K, 5000K

Dimming

Triac dimming

Projected Lifetime

L70 - 50,000 Hours

Working Temperature

-4-104°F (-20-40°C)

Certifications

- ETL listed
- Suitable for dry locations
- RoHs compliant

Ordering Information

Example: FM14-16LMSW804

Shape	Dimension	Lumens	CCT	CRI	Voltage	Controls	Finish
FM	10 -10"	10LM - 1000 Lumens	SW- 3000K/4000K/ 5000K selectable	80 - 80Ra	4 - 120V	Blank - None	Blank - Brush Nickel
	12 -12"	10LM - 1000 Lumens					
	14 -14"	16LM - 1600 Lumens					
	16 -16"	19LM - 1900 Lumens					
	18 -18"	22LM - 2200 Lumens					
							WH - White

Notice:

*Minimum order required, please contact customer service for additional information.

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	Size	AC Input 120V	CCT	CRI	LPW
16	1000	10IN	0.13A	4000K	80	63
15	1000	12IN	0.13A	4000K	80	67
21	1600	14IN	0.18A	4000K	80	76
24	1900	16IN	0.20A	4000K	80	79
28	2000	18IN	0.23A	4000K	80	71

COMPATIBLE DIMMERS

Brand	Model
LUTRON	DVCL-153PR
	STCL-153PH-WH
	MACL-153MLH-WH
	PD-6WCL-WH-R
LEVITON	R00-RNL06-0TW
	R11-DSL06-1TW

Warranty

Five year limited warranty.

Note:

Specifications subject to change without notice.