



LED STANDARD WALL PACK



PRODUCT DESCRIPTION

LED Wall Packs are designed and engineered as maintenance free, energy-efficient alternatives to traditional fluorescent, high & low pressure sodium, metal halide, induction, and other types of light sources.

CONTROL

- Photo control: Voltage-specific photocontrols power the fixture when light levels reach 20 lux or below, and turn it off at 30 lux or higher.
- Motion/Daylight sensor: 0-10V microwave-based motion sensor with integral photocontrol, allowing for three output states: 100%; 10/20/30/50% output; or 0% output. Detection area, hold time, daylight threshold, and dimming level all have DIP switches. At its maximum mounting height of 32 feet, the sensor can detect motion up to 30 feet away. Sensor mounted internally behind glass lens.

ELECTRICAL SYSTEM

- Input Voltage: 120-277V/ 120V/ 277V
- 50/60Hz
- Power Factor: > 0.98 at 120Vac
- Total Harmonic Distortion: < 20%
- Integral 4KV surge suppression protection standard


SPECIFICATION

20W & 30W

Depth: 14.5"
 Width: 9.0"
 Height: 7.5"
 Max. Weight: 10.12 lbs

35W & 52W

Depth: 18.5"
 Width: 9.0"
 Height: 9.5"
 Max. Weight: 16.7 lbs

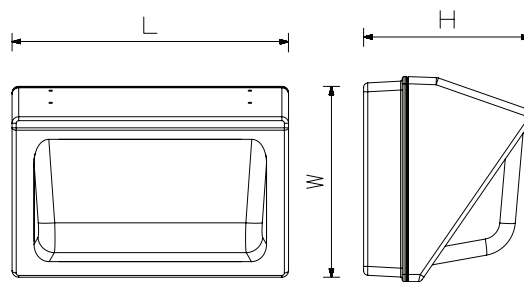

PERFORMANCE

CRI

80+

CCT

4000K, 5000K

Dimming

0-10V Dimming Standard

Projected Lifetime

L70 - 155,000 Hours

Working Temperature

-40-104 °F (-40-40 °C)

Certifications

- cETLus conforms to UL Std. 1598
Cert. to CSA Std. C22.2 No.250.0
- Suitable for wet location
- IP65 rated
- RoHS compliant
- ABBWP20**1-PC complies with 2013 California Title 24

Ordering Information

Example: ABBWP30504-PC

ABOVE ALL	Wall Pack	Watts	CCT	Voltage	Control
ABB	WP	20 - 20 Watts	40 - 4000K	1- 120-277V	MSW - Microware Motion Sensor⁴
		30 - 30 Watts	50 - 5000K	4PC-120V photocell	EBU - Emergency Battery Backup³
		40 - 35 Watts		5PC-277V photocell	Leave blank for no controls
		55 - 52 Watts			


Notice:

- EBU solution are only available in 20W, 30W and 35W. And the working temperature is 32-104°F. The EBU is Title 20 compliant.
- The sensor can not be installed in the room of long-time vibration because the vibration signal will be regarded as the moving signal to trigger sensor.

* Standard Finish as Dark Bronze. Special Order as other finish color - Please Ask Customer Service for Details.

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory.

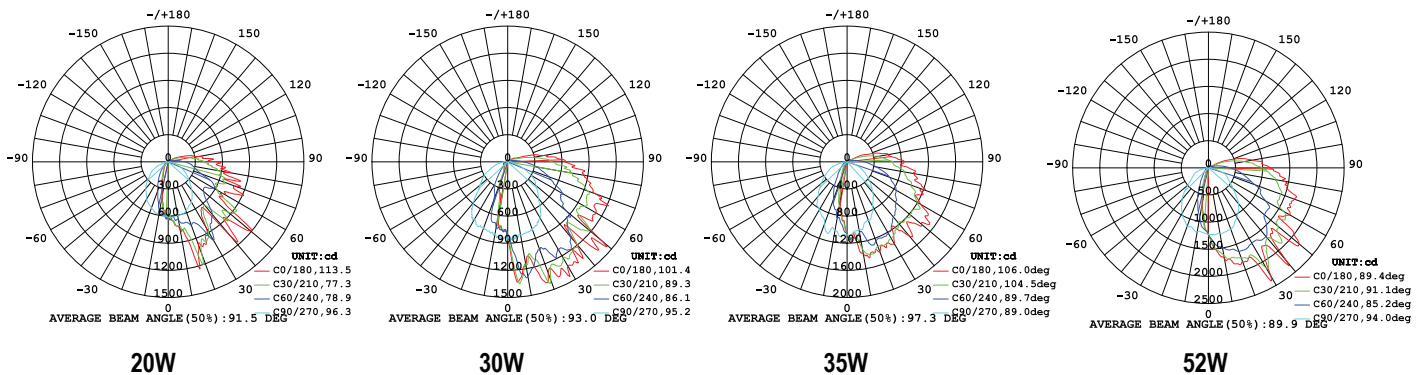

PERFORMANCE DATA

LUMEN OUTPUT

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Watts	Lumen Output	Measured AC Input Watts	AC Input 120V	CCT	CRI	LPW
20W	2385	21	0.19A	5000K	>80	114
30W	3269	31	0.28A	5000K	>80	105
35W	3663	37	0.37A	5000K	>70	105
52W	4941	50	0.48A	5000K	>70	99

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperature from -40-104°F (-40-40°C)

Ambient		Multiplier
Celsius	Fahrenheit	
0	32	1.02
10	50	1.01
20	68	1.00
25	77	1.00
30	86	1.00
40	104	0.99

Projected LED Lumen Maintenance

Data references the extrapolated performance projections for the ABBWP55501 in a 77°F ambient, (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Operating Hours	0	9,000	18,000	37,000	155,000
Lumen Maintenance Factor	1.0	0.98(L98)	0.96(L96)	0.92(L92)	0.70(L70)

Ref#:20250828

Warranty

Five year limited warranty. Full warranty terms located at www.aboveallLighting.com/warrantystatements

Note:

Specifications subject to change without notice.