
# **ARBOR LED BOLLARD**





### **Optional Pole Finishing**







Deep wood texture











The Arbor LED Bollard features attractively shielded light distribution, with a fully shielded light source that effectively minimizes upward light spill for enhanced safety and passerby comfort. Constructed with superior UV-resistant powder coating, a high-quality die-cast aluminum body, tempered safety glass lens, molded silicone gasket, and stainless steel screws, it delivers durability and precision. A distinctive wood texture finish is also available. This bollard is an excellent choice for walkways, entrances, promenades, plazas, courtyards, driveways, bridges, and landscaped areas.

## **TECHNICAL DATA**

Wattage	10W
CRI	80
CCT	3000K, 4000K
	3000K-DarkSky Approved
Driver	Non-Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-22°F to 104°F(-30°C to 40°C)
Certifications	cETL listed
	Suitable for wet location
	RoHS compliant
	DarkSky Approved for CCT of
	3000K and below
Power Factor	>0.9 at 120 Vac
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours
IP Rating	IP65

### **FEATURES**


- Optimized Visual Comfort: Fully shielded light source.
- Versatile Application: Ideal for a wide range of exterior spaces.
- Premium Construction: UV powder-coated die-cast aluminum body. Molded silicone gasket & stainless steel screws.




# **SPECIFICATION**


#### **Dimension**

#### Side View

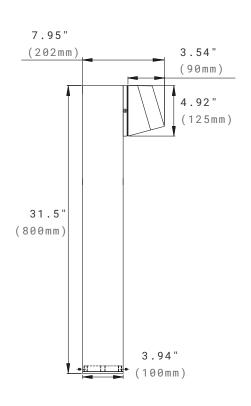

#### **Base Plate**





# **PERFORMANCE DATA**

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Lumen Output	AC Input 120V	CRI	ССТ
10W	490LM	0.08A	80	3000K

# **ARBOR LED BOLLARD**



# **ORDERING INFORMATION**

#### **Standard Model**

EXAMPLE: ARBD32H-10401-BK

ARBD Series	Height	Wattage	ССТ	Voltage	Control	Finish
ARBD Arbor Bollard	<b>32H</b> 31.5" Height	<b>10</b> 10W	<b>30</b> 3000K <b>40</b> 4000K	<b>1</b> 120-277V	BLANK On/Off	BK Black Wood Texture Optional¹ Additional fees applied.

#### NOTE:

1. The standard color is black finish; Wood texture finish and other optional finish colors are available at an additional charge. Please contact Customer Service for details.

# DarkSky-Approved Model

EXAMPLE: ARBD32H-10301-BK

ARBD Series	Height	Wattage	сст	Voltage	Control	Finish
ARBD Arbor Bollard	<b>32H</b> 31.5" Height	<b>10</b> 10W	<b>30</b> 3000K	<b>1</b> 120-277V	BLANK On/Off	<b>BK</b> Black
						Wood Texture Optional <sup>1</sup> Additional fees applied.

#### NOTE:

1. The standard color is black finish; Wood texture finish and other optional finish colors are available at an additional charge. Please contact Customer Service for details.



# WOOD TEXTURE OPTIONS



LWTC-1/2-TP

Pole finish

1/2 light wood texture on the top, and 1/2 black on the bottom.

#### LWTC-2/3-TP

Pole finish

2/3 light wood texture on the top, and 1/3 black on the bottom.



### DWTC-1/2-TP

Pole finish

1/2 deep wood texture on the top, and 1/2 black on the bottom.

#### DWTC-2/3-TP

Pole finish

2/3 deep wood texture on the top, and 1/3 black on the bottom.

Notes: For alternative finish/paint ratios, please contact Customer Service.

# **ACCESSORIES (ORDERED SEPARATELY)**



#### **ABMK-ARBD**

Anchor Bolts Mounting Kits.

## **BUG RATING TABLE**

Performed to IESNA LM-79-08 standards by a NVLAP accredited laboratory.

Model	BUG Rating
ARBD32H_10301_BK	B0-U0-G0
ARBDXXH_10301_BK	B0-U0-G0

# **WARRANTY**

5 years limited warranty.

Specifications subject to change without notice.