

The Jenn Frame LED Light is designed with lightweight aluminum frame. Available in 2ftx2ft and 2ftx4ft. Recessed form factor fits most T-grid systems. It is architectural recessed lighting solution that compatible for commercial and institutional environments, including office building, medical, health, educational, retail, hospitality, airport, hotel, etc.

TECHNICAL DATA

Length/Wattage


2ftx2ft	Selectable 20W/30W/40W
2ftx4ft	Selectable 40W/50W/60W
CRI	80
CCT	Selectable 3000K/3500K/4000K/ 5000K/6500K
Driver	0 -10V Dimming
Input Voltage	120-277V, 50/60Hz
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	cULus listed Suitable for dry locations RoHS compliant
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load
Projected Lifetime	L70 - 100,000 Hours

FEATURES


- Slim frame design.
- CCT selectable.
- Available in 2ftx2ft and 2ftx4ft sizes.
- Milky Lens is standard.

SPECIFICATION


2x2ft




Side View



2x4ft

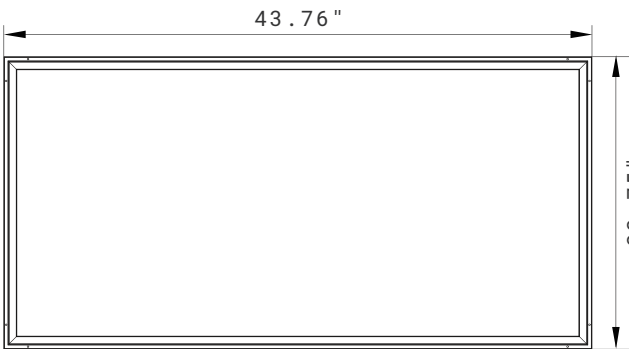

Side View



PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Size	Lumen Output	AC Input 120V	CCT	CRI	LPW
20W	2'x2'	2500lm	0.17A	4000K	80	125
30W	2'x2'	3750lm	0.25A	4000K	80	119
40W	2'x2'	5000lm	0.33A	4000K	80	125
40W	2'x4'	5000lm	0.33A	4000K	80	125
50W	2'x4'	6250lm	0.42A	4000K	80	125
60W	2'x4'	7500lm	0.50A	4000K	80	125

ORDERING INFORMATION

EXAMPLE: FRM22-40SP-SW1-JEN

FRM						
Series	Length	Wattage	CCT	Voltage	Series	Finish
FRM	22 2X2ft	40SP ¹ Selectable 20W 30W 40W ¹	SW ² Selectable 3000K 3500K 4000K ² 5000K 6500K	1 120-277V	JEN	BLANK ³ White ³
	24 2X4ft	54SP ¹ Selectable 40W 50W 60W ¹				

NOTE:

1. 40W is default setting for 2ftx2ft. 60W is default setting for 2ftx4ft. Other wattages can be set by DIP switch.
2. 4000K is default setting. Other CCT can be set by DIP switch.
3. White finish is standard. Custom color is available for a premium setup fee. Consult Customer Service for additional information.

ACCESSORIES (ORDERED SEPARATELY)



AAL-EBU-DC08D-XXX

Remote 8W LED

Emergency Battery

Back-up 120-347VAC.

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.