



The SVAN LED Bath and Vanity Light looks modern and up to date. It has brushed nickel stainless steel base and PMMA white diffuser. 3000K, 4000K and 5000K selectable. It brings you a bright and beautiful bathroom.

TECHNICAL DATA


Wattage	25W, 30W, 35W,
Lumen Output	2500lm, 3000lm, 3500lm
CCT	Selectable 3000K/4000K/5000K default setting: 4000K
Length	24inch, 36inch, 48inch
Driver	Triac dimming
CRI	80
Input Voltage	120V, 50/60Hz
Projected Lifetime	L70-50,000 Hours
Operating Temp.	-4°F to 104°F (-20°C to 40°C)
Certifications	ETL Listed RoHS compliant Suitable for damp locations
Power Factor	>0.9 at full load
Harmonic Distortion	<20% at full load

FEATURES

- **Material & Design:** Brushed nickel stainless steel, white PMMA diffuser.
- **Function & Compatibility:** Wattage and CCT selectable, 120V triac dimmable, compatible with various J-box, suitable for damp locations.

SPECIFICATION

Dimension

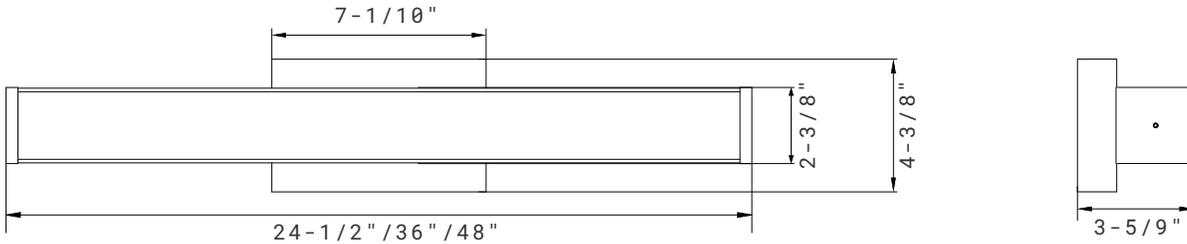

ORDERING INFORMATION

EXAMPLE: SVAN24-25SW804-BN

SVAN							
Series	Size	Wattage	CCT	CRI	Voltage	Dimming	Finish ²
SVAN	24 24"	25 25W	SW ¹ Selectable 3000K 4000K ¹ 5000K	80 80CRI	4 120V	BLANK Traic dimming driver	BN Brushed Nickel ²
	36 36"	30 30W					
	48 48"	35 35W					

NOTE:

- 4000K is default setting.
- Brushed nickel is standard. Custom colors are available at an additional charge. Please contact the Customer Service for details.

PERFORMANCE DATA


Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Lumen Output

Wattage	Lumen Output	AC Input 120V	CCT	CRI	LPW
25W	2500lm	0.21A	4000K	80	100
30W	3000lm	0.25A	4000K	80	100
35W	3500lm	0.29A	4000K	80	100

PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

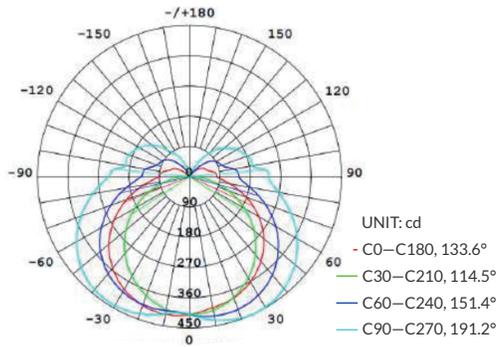

AVERAGE BEAM ANGLE(50%): 147.7 DEG

WARRANTY

5 years limited warranty.

Specifications subject to change without notice.