

# CURVE MAGNETIC TRACK LIGHT

## Meteor Pendant



Not only for decoration, it's professional in atmosphere creation by precious light control. Thanks to the length adjustable cable, the magnetic pendant works smooth in different spaces. Comfortable lighting without glare.

### TECHNICAL DATA

<b>Wattage</b>	5W
<b>Input Voltage</b>	24VDC
<b>Lens</b>	Diffused
<b>CCT</b>	2700K, 3000K, 3500K, 4000K
<b>CRI</b>	90
<b>Driver</b>	Triac, 0/1-10V
<b>Certifications</b>	cETL Listed RoHS compliant
<b>Installation</b>	Magnetic
<b>Environment</b>	Indoor



4"



8"

### ORDERING INFORMATION

EXAMPLE: CMET8-05-3090-24V-DL-MTM-BK


CMET Series	Tube Length	Wattage	CCT&CRI	Voltage	Lens	Installation	Finish
CMET	4 4"	05 5W	2790 2700K/90Ra	24V <sup>1</sup> 24VDC <sup>1</sup>	DL Diffused	MTM Magnetic Track Mount	BK <sup>2</sup> Black <sup>2</sup>
	8 8"		3090 3000K/90Ra				WH <sup>2</sup> White <sup>2</sup>
			3590 3500K/90Ra				
			4090 4000K/90Ra				

**NOTE:**

1. The fixture is used for 24V magnetic track system.
2. Black and white finish is standard. Custom finish colors are available at an additional charge. Please contact Customer Service for premium options.

### DIMENSION



**4" Tube Length**

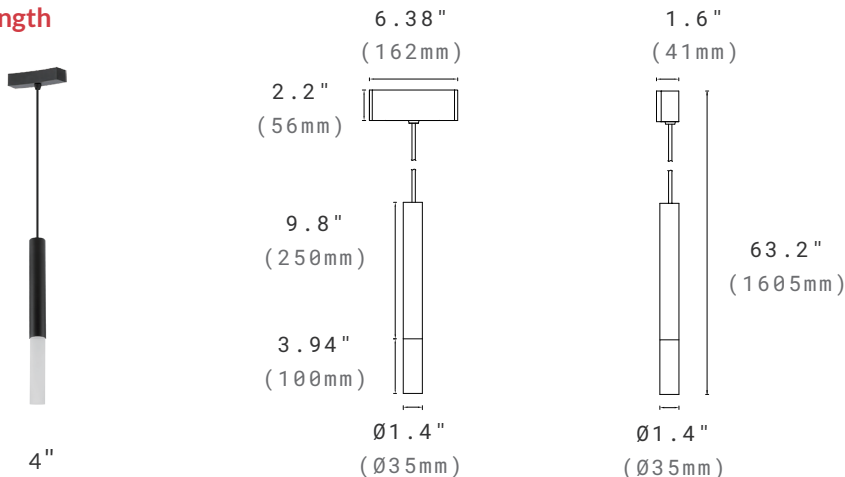

# CURVE MAGNETIC TRACK LIGHT


## Meteor Pendant

### 8" Tube Length

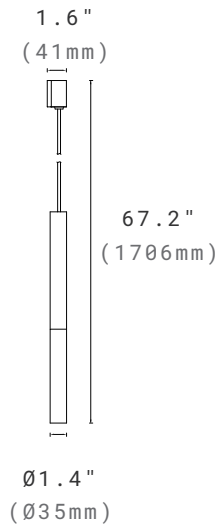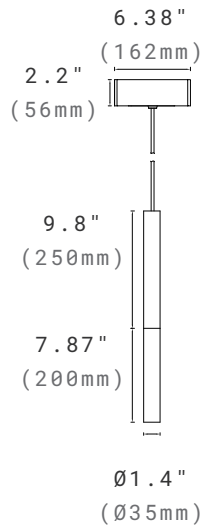


## PHOTOMETRY

All published luminaire photometric testing performed to IESNA LM-79-08 standards by a NVLAP certified laboratory. IESNA LM-79-08 specifies the entire luminaire as the source resulting in a fixture efficiency of 100%. Results may vary per actual order.

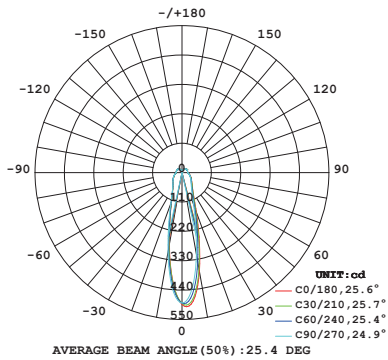

**MET4**

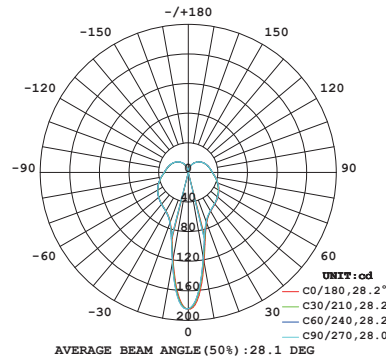

**MET8**

## PERFORMANCE DATA

Lumen values are measured by third party certified laboratories performed in accordance with IESNA LM-79-08 as well as Lighting Facts listed.

Wattage	Tube Length	Lumen Output	CRI	CCT	LPW
5W	3.94"	460lm	90	3000K	92
5W	7.87"	460lm	90	3000K	92